


SHEET 1 OF 1

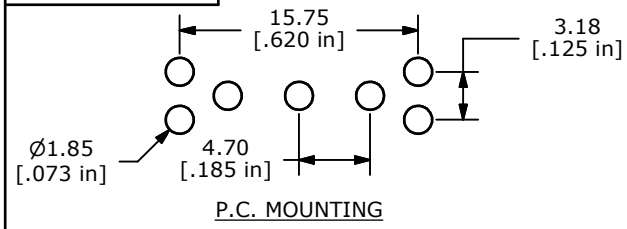


P.C. MOUNTING

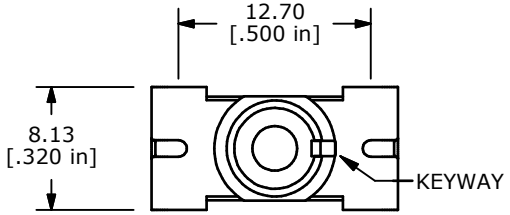


ISOMETRIC

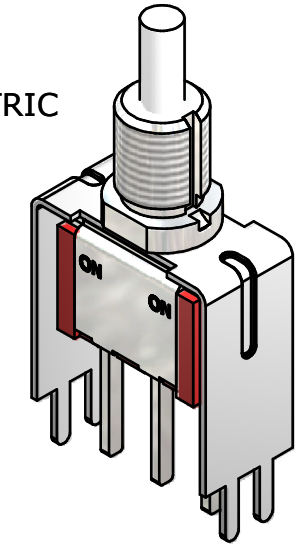

▲ SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
1-2	2-3




CIRCUIT: SPDT

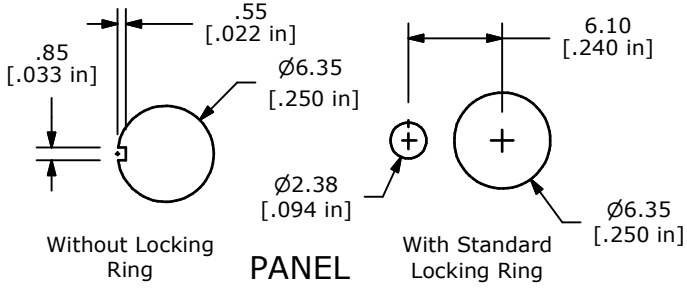


Without Locking Ring

PANEL

With Standard Locking Ring

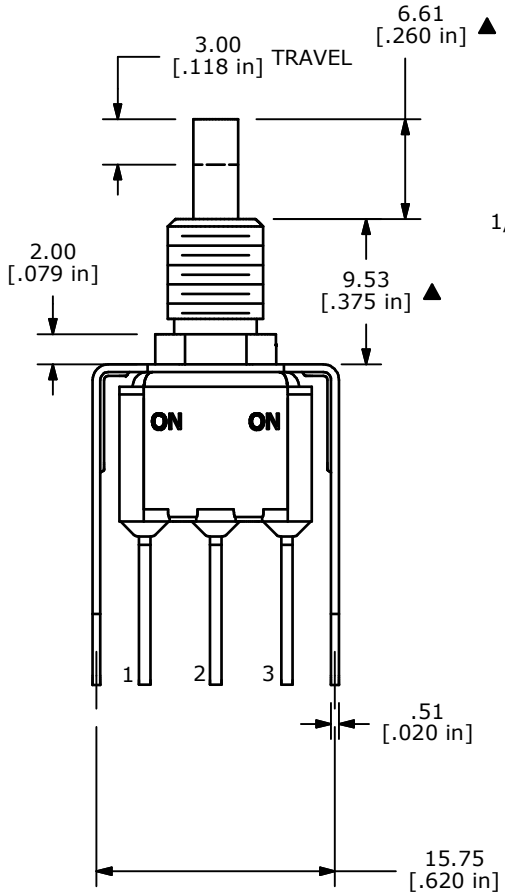

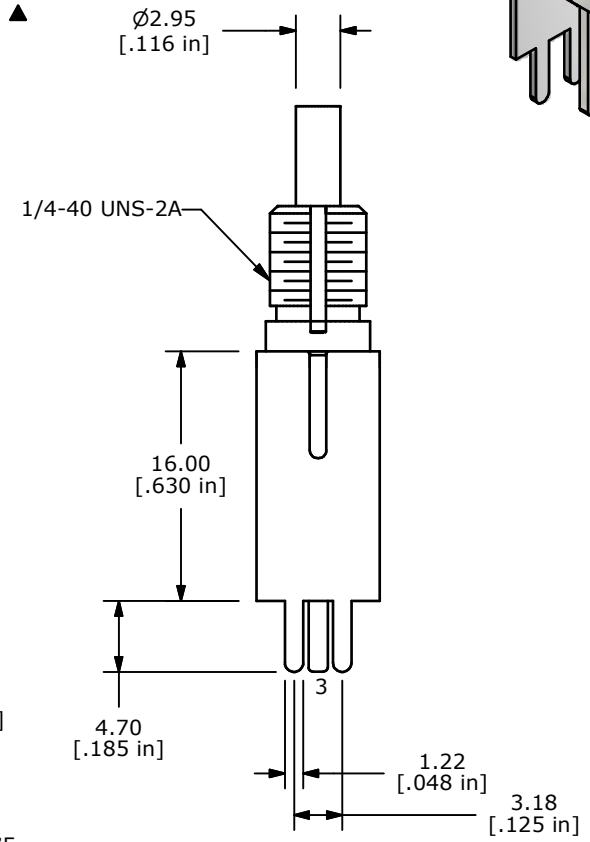

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. PLATING MATERIAL: SILVER
5. RATING: 3A @ 120VAC or 28VDC; 1A @250VAC.
6. CONTACT RESISTANCE: 20 Milli-OHMS MAX.
7. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
8. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
9. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.
12. HARDWARE TO BE SHIPPED BULK
    T100000 - HEXNUT - QTY 2
    T100011 - LOCKWASHER - QTY 1
    T100015 - LOCKRING - QTY 1
13. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
A	18739	RELEASED FOR PRODUCTION	1/5/2010	BLR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH® | LAMB™ INDUSTRIES

TITLE 700CSP7B60VS3QEH

SCALE	DATE	DR	DWG	REV
2:1	1/5/2010	BLR	ST711080	A