



ACE515

Low Noise, fast response 300mA LDO regulator

Description

ACE515 series is a group of positive voltage output, low power consumption, low dropout voltage regulator.

ACE515 can provide output value in the range of 1.0V~4.5V every 0.1V step. It also can be customized on command.

ACE515 includes high accuracy voltage reference, error amplifier, current limit circuit and output driver module with discharge capability.

ACE515 has excellent load and line transient response and good temperature characteristics, which can assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

Features


- Low Power Consumption: 25uA (Typ)
- Low Output Noise (47uVRMS)
- Standby Mode: 0.1uA
- Low Dropout Voltage 0.16V@300mA (Typ.)
- High Ripple Rejection: 73dB @100Hz (Typ.)
- Low Temperature Coefficient: $\pm 100\text{ppm}/^\circ\text{C}$
- Excellent Line Regulation: 0.05%/V
- Build-in Chip Enable And Discharge Circuit
- Output Voltage Range: 1.0V~4.5V (customized on command every 0.1V step)
- High Accurate: $\pm 2\%$
- Output Current Limit

Application

- Power source for cellular phones and various kind of PCSs
- Battery Powered equipment
- Power Management of MP3, PDA, DSC, Mouse, PS2 games
- Reference voltage source
- Regulation after switching power

Typical Performance Characteristic:

Load Regulation ($V_{\text{out}}=4.5\text{V}$)

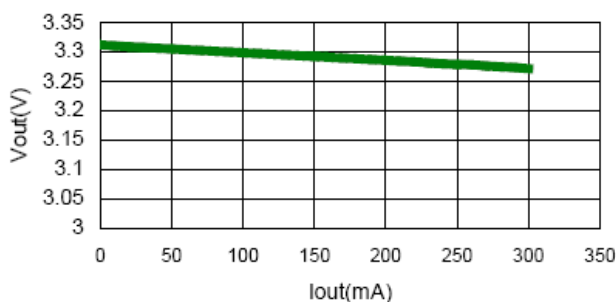



ACE515

Low Noise, fast response 300mA LDO regulator

Absolute Maximum Ratings


Parameter	Symbol	Max	Unit
Max Input voltage	V_{IN}	8	V
Power Dissipation SOT-23-5 SC-70-5		250 250	mW
Junction temperature	T_J	125	°C
Storage temperature	T_S	- 45 to 150	°C
Output Current		300	mA
Ambient Temperature	T_A	-40 to 85	°C

Note:

Exceed these limits to damage to the device.

Exposure to absolute maximum rating conditions may affect device reliability.


Packaging Type



SC-70-5	SOT-23-5(A)	SOT-23-5(B)	Description	Function
5	5	1	Vout	Output pin
1	1	3	VDD	Input pin
2	2	2	GND	Ground pin
3	3	4	CE	Chip Enable pin
4	4	5	NC	No Connection

Ordering information

ACE515 XX XX + H

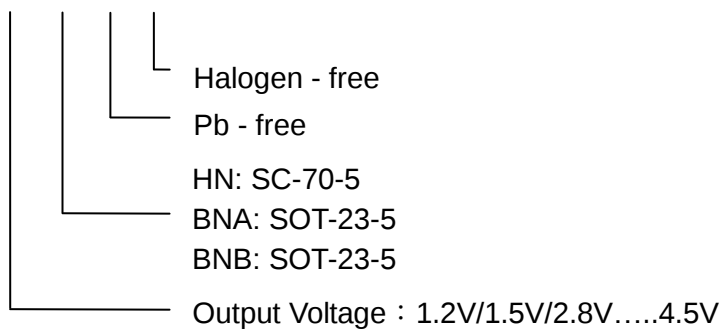




ACE515

Low Noise, fast response 300mA LDO regulator

Block Diagram

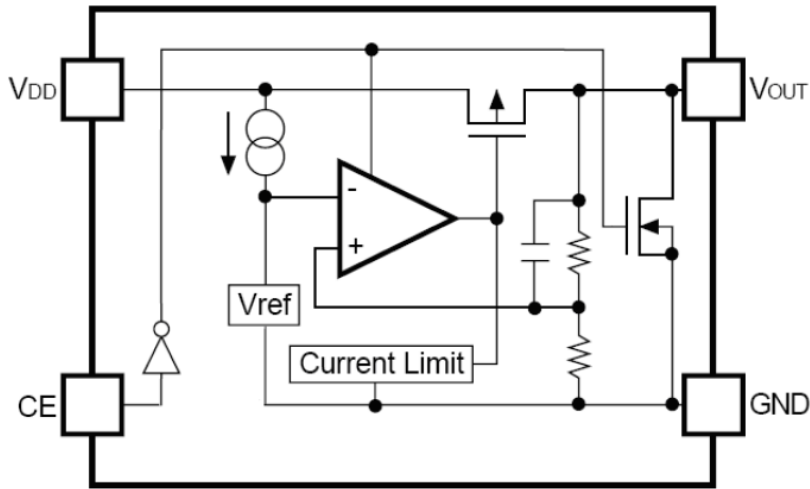

Recommended Work Conditions

Item	Min	Max	Unit
Input Voltage Range	2	6	V
Ambient Temperature	-40	85	°C

Electrical Characteristics

ACE515 for arbitrary output voltage (Test Conditions: $C_{in}=1\mu F$, $C_{out}=1\mu F$, $T_A=25^\circ C$, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Input Voltage	V_{IN}		2		6	V
Output Voltage	$V_{OUT}>1.5V$	$V_{IN}=\text{Set } V_{OUT}+1V$ $1mA \leq I_{OUT} \leq 30mA$	$V_{OUT} \times 0.98$	$V_{OUT}1$	$V_{OUT} \times 1.02$	V
	$V_{OUT} \leq 1.5V$		$V_{OUT} - 0.03$	$V_{OUT}1$	$V_{OUT} + 0.03$	
Maximum Output Current	$I_{OUT}(\text{Max.})$	$V_{IN} - V_{OUT}=1V$	300			mA
Dropout Voltage, $V_{OUT} \geq 2.8V$	V_{drop}^1	$I_{OUT}=100mA$		50	80	mV
		$I_{OUT}=300mA$		160	220	mV
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	$I_{OUT}=40mA$ $2.8V \leq V_{IN} \leq 6V$		0.05	0.2	%/V
Load Regulation	$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	$V_{IN}=\text{Set } V_{OUT}+1V$ $1mA \leq I_{OUT} \leq 300mA$		60	100	mV
Supply Current	I_{SS}	$V_{IN}=\text{Set } V_{OUT}+1V$		25	50	uA
Supply Current (Standby)	$I_{standby}$	$V_{IN}=\text{Set } V_{OUT}+1V$ $V_{ce}=\text{GND}$		0.1	1.0	uA
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T \cdot V_{OUT}}$	$I_{OUT}=30mA$		± 100		ppm/ °C



ACE515


Low Noise, fast response 300mA LDO regulator

Ripple Rejection	PSRR	F=100Hz, Ripple=0.5Vp-p $V_{IN} = \text{Set } V_{OUT} + 1V$		70		dB
Short Current Limit	Ilim	$V_{OUT} = 0V$		500		mA
CE Pull down Resistance	Rpd		2.0	5.0	10.0	mΩ
CE Input Voltage "H"	Vceh		1.5		V_{IN}	V
CE Input Voltage "L"	Vcel		0		0.25	V
Output Noise	En	BW=10Hz~100kHz		47		uVrms

Note: $V_{drop} = V_{in} - (V_{out2} \times 0.98)$ V_{out2} is the output voltage when $V_{in} = V_{out1} + 1.0V$ and $I_{out} = 300mA$.

V_{in} is the input voltage at which the output voltage becomes 98% of V_{out1} after gradually decreasing the input voltage.

Typical Application Circuit

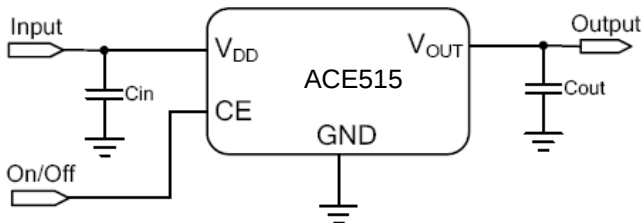

Note Input capacitor ($C_{in} = 1\mu F$) and Output capacitor ($C_{out} = 1\mu F$) are recommended in all application circuit.

Explanation :

ACE515 series is a group of positive voltage output, low noise, low power consumption, low dropout voltage regulator.

ACE515 can provide output value in the range of 1.0V~4.5V every 0.1V step. It also can be customized on command.

ACE515 includes high accuracy voltage reference, error amplifier, current limit circuit and output driver module.


ACE515 has excellent load and line transient response and good temperature characteristics, which can assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.



Typical Performance Characteristics


1. Output Voltage vs. Output Current (with output short protection)

Current limit vs. Vout

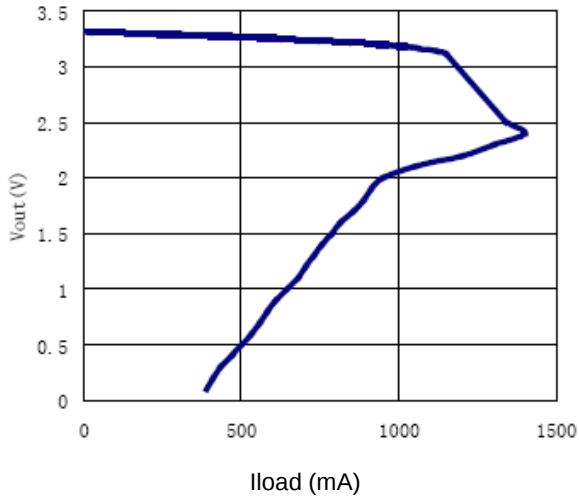


2. Output Voltage vs. Input Voltage


Lin Regulation

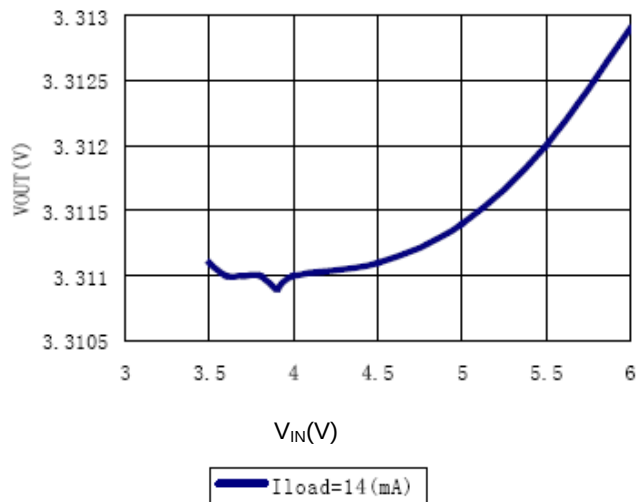

3. Dropout Voltage vs. Output Current Dropout & Iout

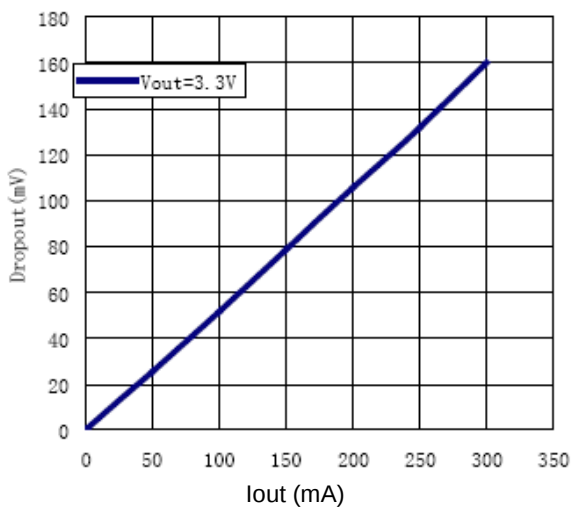



4. Ripple rejection vs. Frequency PSRR

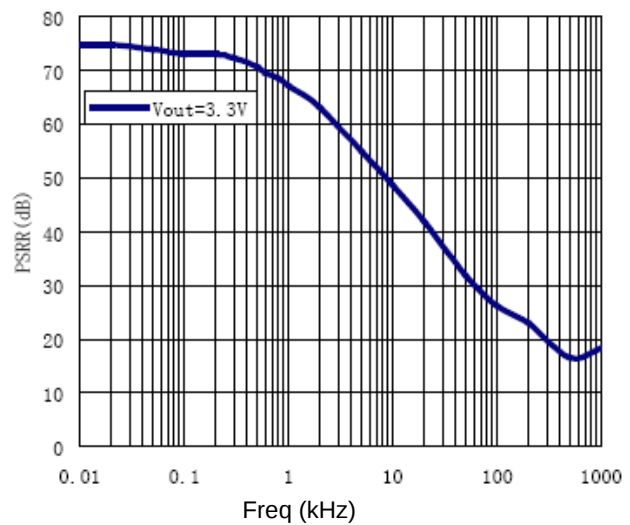





5. Line transient response

$C_{in}=C_{out}=1\mu F$ $I_{out}=25mA$ $V_{out}=3.3V$

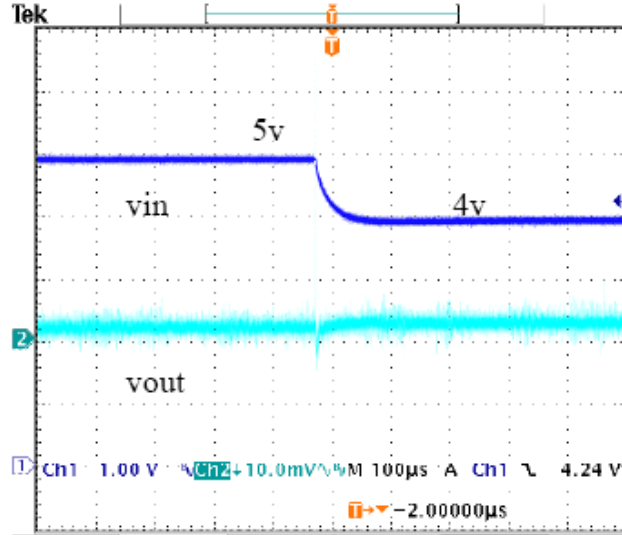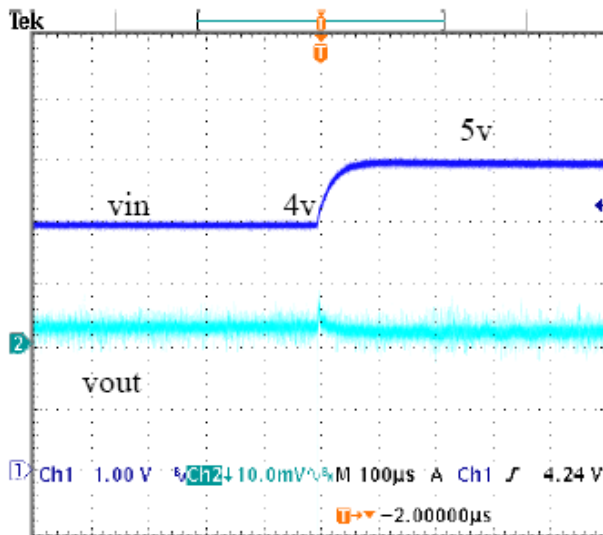


6. Line transient response


$C_{in}=C_{out}=1\mu F$ $V_{in}=4.5V$ $V_{out}=3.3V$

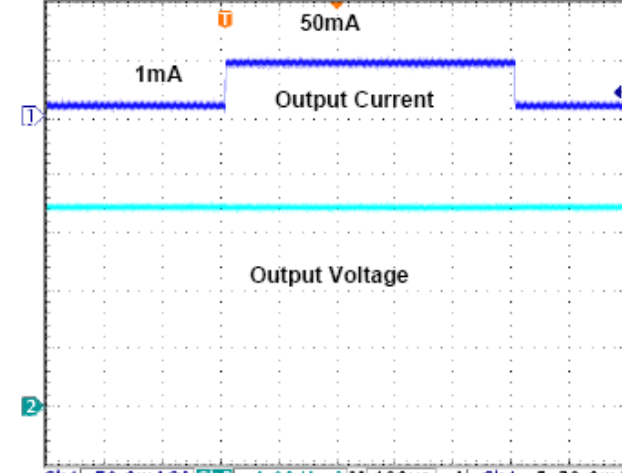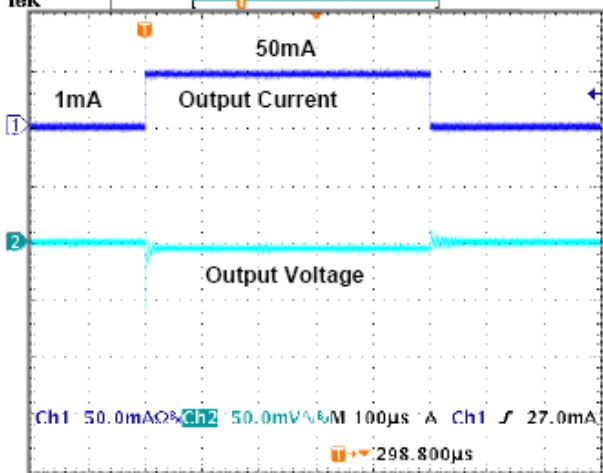

7. Startup up from EN

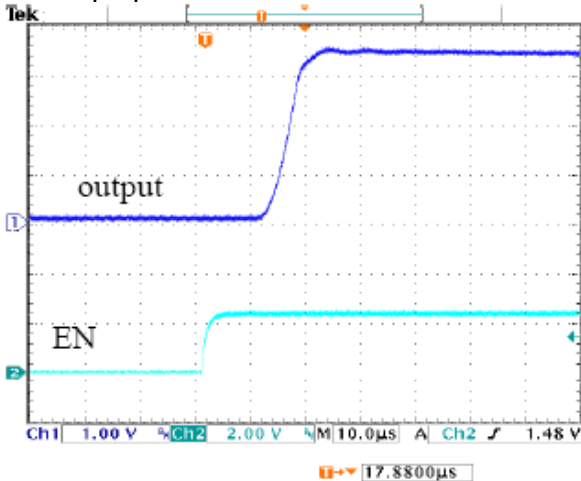

8. Shutdown, from EN

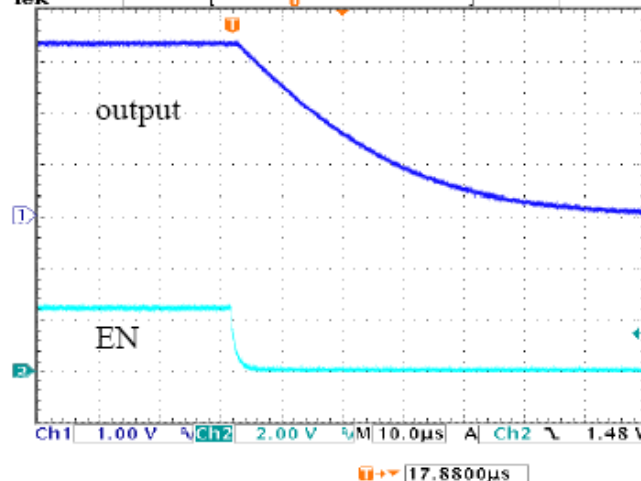




ACE515


Low Noise, fast response 300mA LDO regulator

Packing Information

SC-70-5

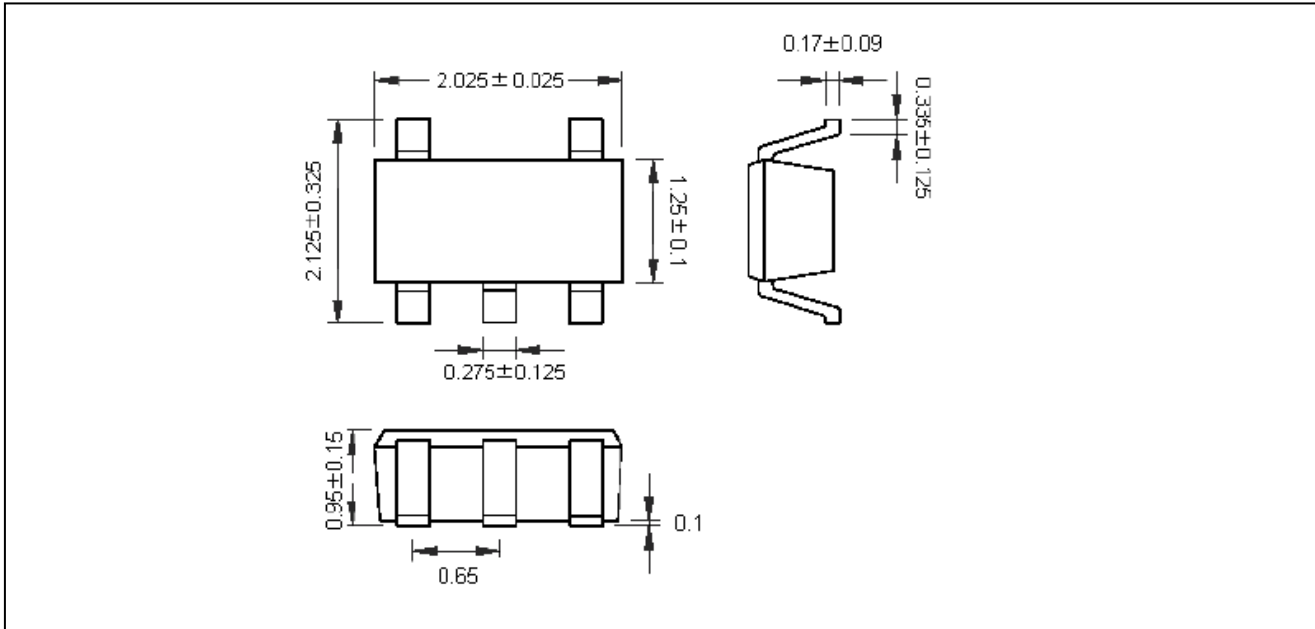

SOT-23-5

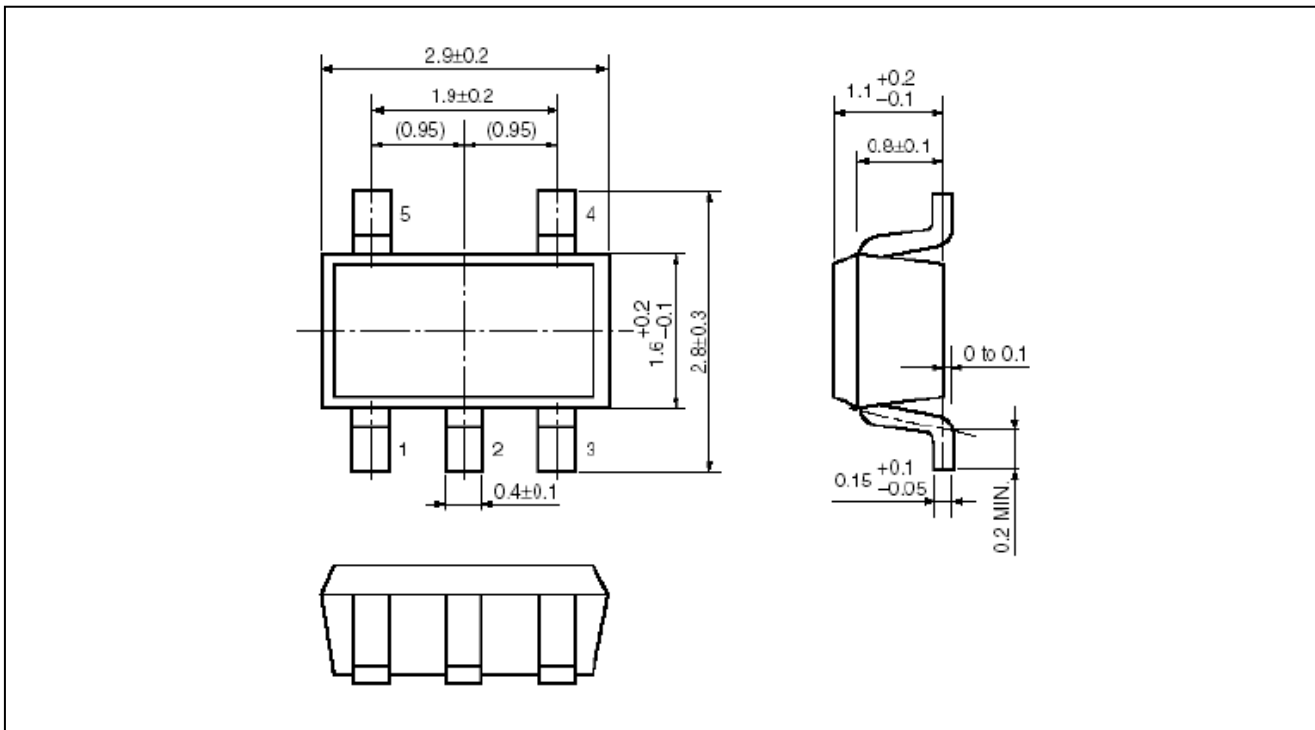



ACE515

Low Noise, fast response 300mA LDO regulator

Notes

ACE does not assume any responsibility for use as critical components in life support devices or systems without the express written approval of the president and general counsel of ACE Electronics Co., LTD. As sued herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ACE Technology Co., LTD.
<http://www.ace-ele.com/>