



4

3

2

1

used for: D-SUB COMBINATION

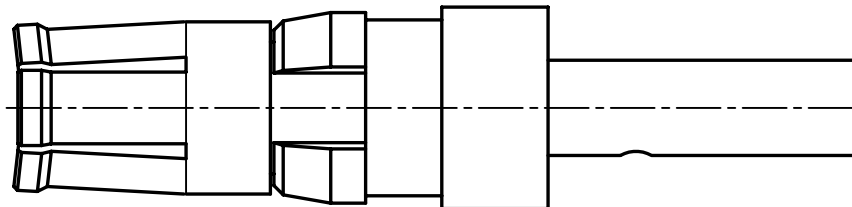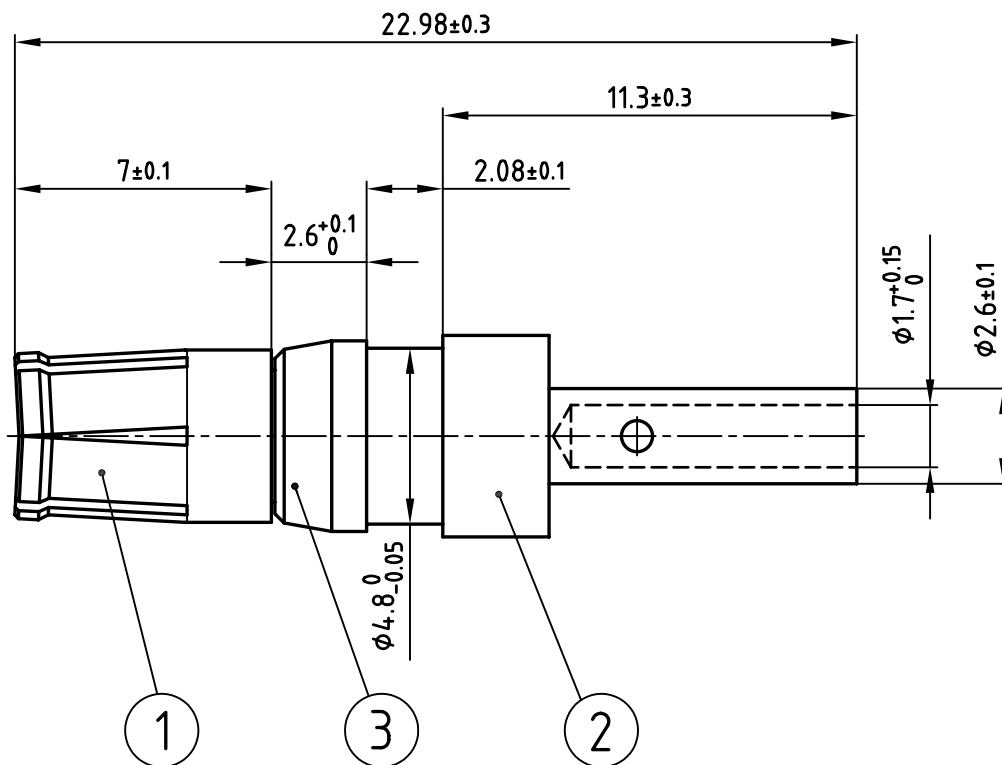

NOTES:

1. MATERIAL: COPPER ALLOY

2. PLATING:

ITEM 1: min. 30µ" HARD GOLD OVER min. 50µ" NICKEL

ITEM 2: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL

ITEM 3: NICKEL PLATED

Directive 2002/95/EC
"RoHS"
CompliantTHIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance ISO 2768-m		
				1998	date	name
				drawn	23.03.	Barcinski
				appd.	23.03.	Mickenbecker
				norm		
				d-old	SK211H20	
						
rev.	description	date	name			

scale: 5:1
material: SEE NOTEStitle:
HIGH POWER CONTACT FEMALE
CRIMP VERSION 10A
D-SUB COMBINATIONdwg no: 13K11E7A
CAD/ REL.13
DIN-A
4
sh: 1/1

product no: 132C11019X

4

3

2

1