
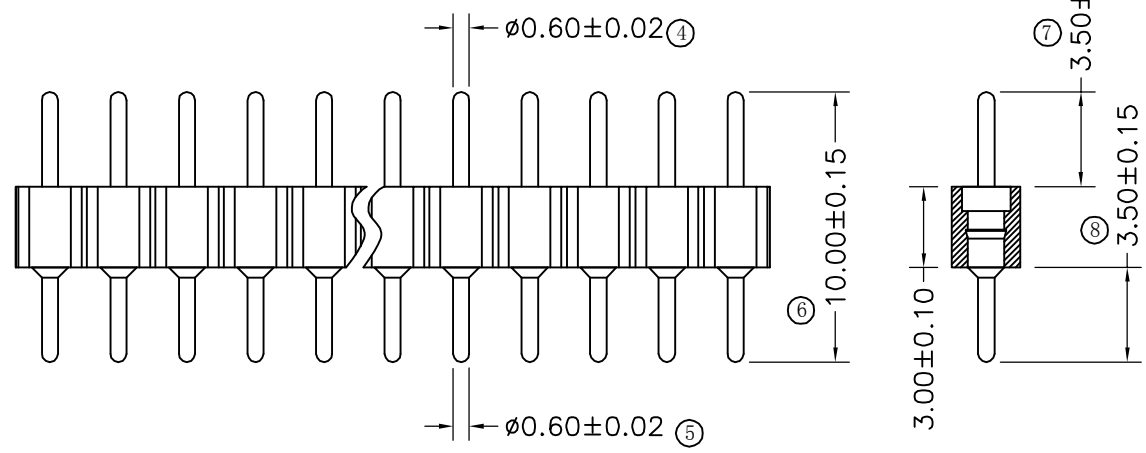


环保物料

TEL:0769-82001899

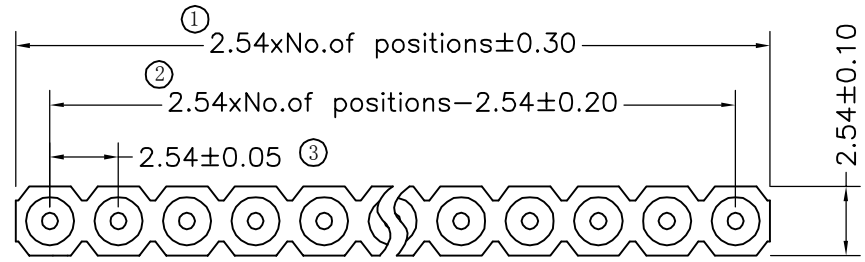

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2μm/80μ"NI, 5μm/200μ"Sn

Gold Plated:2μm"/80μ"Ni, 0.8μ" gold

Insuiator:PPS UL94V-0

Electrical:

Current rating:3Amps/contact max.

Contact resistance:≤4mΩ/contact

Insuiation resistance:≥1000MΩ at V=100V

Dleictric Withstanding Voltage:1000V AV Min


Operaling vointage:60VAC/DC

Mechanical:

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

Critical Dimensions:⊛

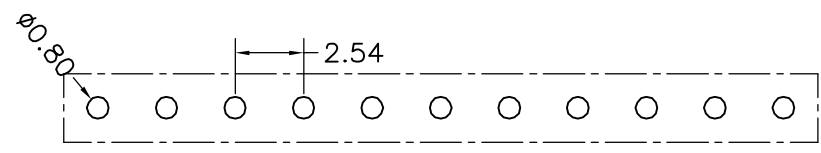

P. C. B LAYOUT

| | | | | | | | | | | | |
|-----|--------------|---|---|----------------------------|-------|-------|--------|---------------------------------------------------|-------|---------|------------|
| | | | | TOLERANCE UNLESS OTHERWISE | | DRAWN | CK tan | XFCN 兴飞连接器有限公司 XFCN CONNECTORS CO.,LTD. | SHEET | 1/1 | |
| | | | | X. | ±0.30 | X° | ±5° | | CHKD | DATE | 2020.04.12 |
| | | | | .X | ±0.20 | .X° | ±2° | | APPD | UNITS | mm |
| | | | | .XX | ±0.08 | .XX° | ±1° | | VIEW | SCALE | 1:1 |
| AO | MODIFICATION | | | DRAW | DATE | .XXX | ±0.03 | .XXX° | ±0.5° | DWG NO. | 009 |
| VER | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | |