

Han 300A module short, female

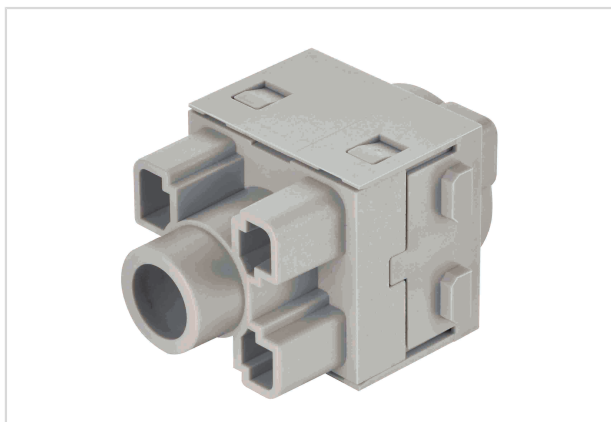


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 14 001 3105 |
| Specification | Han 300A module short, female |
| HARTING eCatalogue | https://b2b.harting.com/09140013105 |

Identification

| | |
|----------------|-------------------------------|
| Category | Modules |
| Series | Han-Modular® |
| Type of module | Han® 300 A module, for busbar |

Version

| | |
|--------------------|-----------------------------------|
| Termination method | Screw termination |
| Gender | Female |
| Number of contacts | 1 |
| Details | Please order contacts separately. |

Technical characteristics

| | |
|-----------------------|--------------------------|
| Rated current | 300 A |
| Rated voltage | 1,000 V |
| Rated voltage | 1,000 V AC 1,300 V DC |
| Rated impulse voltage | 8 kV |
| Pollution degree | 3 |
| Insulation resistance | $>10^{10} \Omega$ |
| Limiting temperature | -40 ... +125 °C |
| Mating cycles | ≥ 500 |

Material properties

| | |
|-------------------|--------------------|
| Material (insert) | Polycarbonate (PC) |
|-------------------|--------------------|



Pushing Performance

Material properties

Colour (insert) RAL 7032 (pebble grey)

Material flammability class acc. to UL 94 V-0

Specifications and approvals

Specifications EN 50124-1
EN 60664-1
IEC 61984

Commercial data

Packaging size 1

Net weight 19 g

Country of origin Germany

European customs tariff number 85366990

eCl@ss 27440217 Module for industrial connectors (power/signals)