
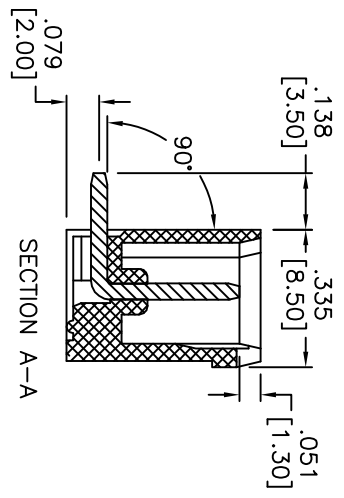
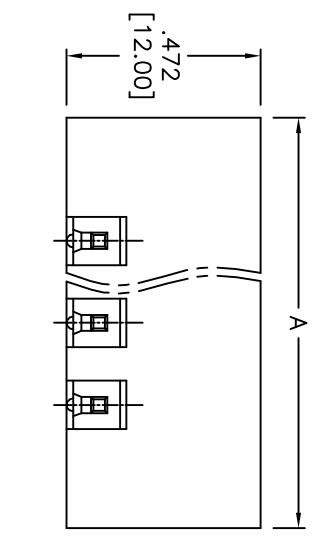
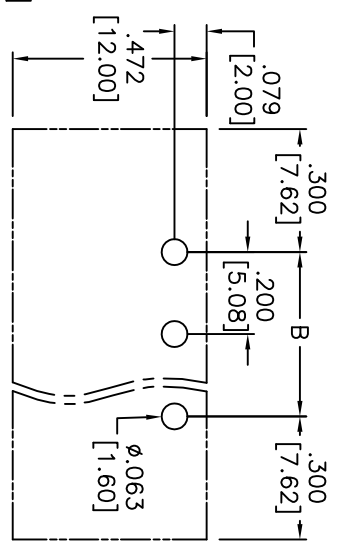
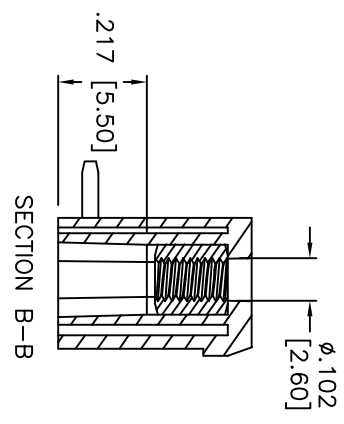


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/11/09	

APPROVED: _____
 DATE: _____ TITLE: _____

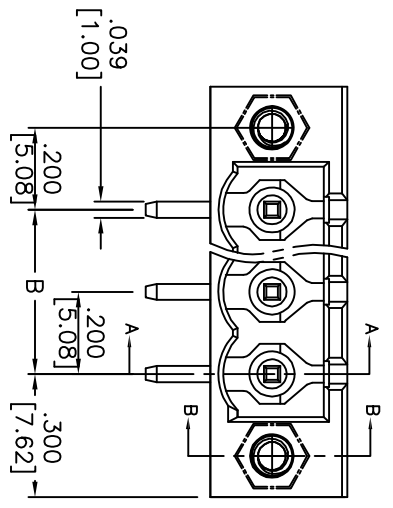

RECOMMENDED PCB LAYOUT

Positions: 02 thru 24
 A = .200 [5.08] x No. of (Positions + 2)
 B = .200 [5.08] x No. of Spaces

SPECIFICATIONS:
 Material: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Contact: Brass, Tin plated
 Flange nut: Brass, M2.5
 Electrical:
 Operation voltage: 300 VAC max
 Current rating: 20 Amps max per Pole
 Dielectric withstanding voltage: 1600 VAC for 1 minute
 Environmental:
 Operating temperature: -40°C to $+115^{\circ}\text{C}$
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



ADAM TECH
 909 Rehoy Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **.200" [5.08] PITCH, TERMINAL BLOCK, W/FLANGE**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ϕ X ± .10
.XX ± .020	ϕ XX ± .015
.XXX ± .015	ϕ XXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	EBO-XX-D-E	-
REF: S00007T	SCALE: NTS	SHEET 1 OF 1