

61 KRE


Screw terminal blocks, pitch 3.5/5.0/10.0 mm



Screw terminal block, with lift clamp with protection against misplacing, upright version, stringable without loss of pitch

State: Active

61 KRE

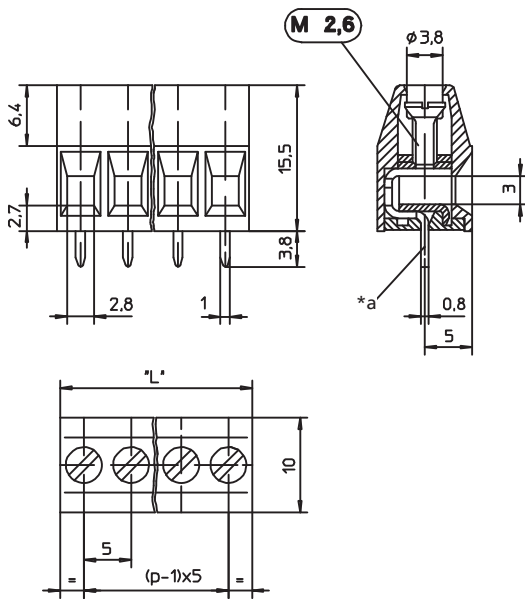

*a bore hole of printed circuit board Ø 1.3 mm

Environmental conditions

Temperature range -25 °C/+100 °C

Materials

Insulating body PA, V-2 according to UL94
Clamp steel, zinc-plated and chromatiert
Wire protector CuZn, pre-nickel and tin-plated
Screw steel, zinc-plated and chromatiert

Mechanical data

Screw size M2,6
Tightening torque screw 0,4 Nm

Connectable conductors for screw clamp

Section ≤ 4,0 mm²

Electrical data (at T_{amb} 20 °C)

Rated current 15 A
Rated voltage 250 V AC, ohne Leiterplatte
Rated impulse voltage 3 kV/60 s
Tracking resistance CTI 600
Creepage distance ≥ 3,6 mm
Clearance ≥ 3,6 mm

61 KRE

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)	Dimensions L (mm)
KRE 02	2	200	1000	10
KRE 03	3	200	1000	15
KRE 04	4	200	1000	20
KRE 05	5	200	1000	25
KRE 06	6	200	1000	30
KRE 07	7	200	1000	35
KRE 08	8	200	1000	40
KRE 09	9	200	1000	45
KRE 10	10	100	1000	50
KRE 12	12	200	1000	60
KRE 18	18	100	1000	90

Packaging:

in bulk, in a cardboard box