

## SPECIFICATION

Part No.	:	<b>MA520.A.BC.008</b>
Product Name	:	Hercules 2in 1 Cellular and Wi-Fi Heavy Duty Screw Mount Antenna - Cellular 2G/3G HSPA/GSM/GPRS/CDMA/EVDO/UMTS/WCDMA 850/900/1800/1900/2100 MHz - WIFI Dual Band Antenna 2.4 GHz / 5.8 GHz
Features	:	Low Profile and Vandal Proof 2M RG-316 Cellular - SMA(M) 2.4/5.8 GHz - RP-SMA(M) IP67 and IP69K Waterproof Rating IEEE.802.11/IEEE.802.15 <b>RoHS Compliant</b>



## **1. INTRODUCTION**

The MA520 Hercules 2in 1 Penta Band Cellular-2.4/5.8GHz Antenna is the smallest package high performance screw-mount (permanent mount) antenna available, for external use on vehicles and outdoor assets worldwide. Everything is in the one housing reducing the need for multiples antenna installations. This is the ideal antenna for 3G gateway routers that provide Wi-Fi hotspots.

It has been designed for heavy duty work with extra thick threads; with durable UV-resistant ABS housing is resistant to vandalism and direct attack. At only 29mm high and 49mm in diameter this antenna enables covert operation and its quality is proven by growing adoption by many of the world's largest wireless brands worldwide. The standard cable length is 1 meter; the antenna can work to cable lengths of 2 meters. The Hercules MA520 exceptional design means it can work equally well mounted on or without ground-plane.

The antenna housing is completely waterproof to IP67, and also to IP69K, which means it is waterproof against high pressure water jets used in industrial environments for cleaning.

## 2. SPECIFICATION

ELECTRICAL								
Standard	AMPS	GSM	DCS	PCS	3G	ISM	ISM	
Band (MHz)	850	900	1800	1900	2100	2400	5000	
Frequency (MHz)	824-894	880-960	1710-1880	1850-1990	1920-2170	2400-2483	5000-5825	
Polarization	Linear							
Impedance (Ohms)	50 Ohms							
Gain (dBi)								
Cable length (meter)	.3	1.7	0.9	1.3	3.5	1.5		
	1.0	1.2	2.1	0.7	1.2	-0.3	3.8	-2.0
	2.0	1.0	1.5	0.4	-0.5	-1.1	2.1	-3.2
	3.0	0.9	1.0	-1.0	-1.5	-2.2		
	5.0	-1.0	-0.7	-4.5	-4.0	-4.3	-1.0	-4.2
Efficiency (%)								
Cable length (meter)	0.3	50.5	40	38.	46.5	32.3		
	1.0	29	41	41	43.4	29.9	40.0	22.0
	2.0	23.5	26.8	29	20.2	19.6	20.0	18.0
	3.0	25	27	22.0	17.8	15.0		
	5.0	18	15.5	15	15.0	12.0	8.5	8.0
Return Loss (dB)								
Cable length (meter)	0.3	-6.0	-5.5	-6.1	-6.2	-5.8		
	1.0	-7.8	-8	-11.4	-15.3	-13.7	-20.0	-10.0
	2.0	-8.1	-8.5	-16.5	-20.3	-19.5	-18.0	-15.0
	3.0	-11.0	-13	-17.5	-18.3	-18.1		
	5.0	-11.8	-14	-17.6	-17.8	-17.8	-25.0	-25.0
Radiation Properties	Omnidirectional							
Max Input Power (Watts)	10							

MECHANICAL	
Dimensions (mm)	Height = 29 x Diameter = 49
Cable	2Meters RG316 Fully Customizable
Connector	Cell: SMA(M) Fully Customizable
Tread Diameter	18 mm
Casing	UV Resistant ABS
Weather proof gasket	CR4305 foam with 3M9448B double side adhesive
Sealant	Rubber Stopper
Base Thread	Nickel plated steel
ENVIRONMENTAL	
Protection	IP67
Corrosion	5% NaCl for 48hrs
Temperature Range	-40°C to +85°C
Thermal Shock	100 cycles -40°C to +85°C
Humidity	Non-condensing 65°C 95% RH
Shock (Drop Test)	1m drop on concrete 6 axes
Cable Pull	8 Kgf

\* The MA520 antenna performance was measured on a 60X60cm metal plate


### 3. TEST SET UP




**Figure 1.** Impedance measurement (left hand) and efficiency, gain, radiation pattern measurements (right hand).

# 4. ANTENNA PARAMETERS


## 4.1. Return Loss

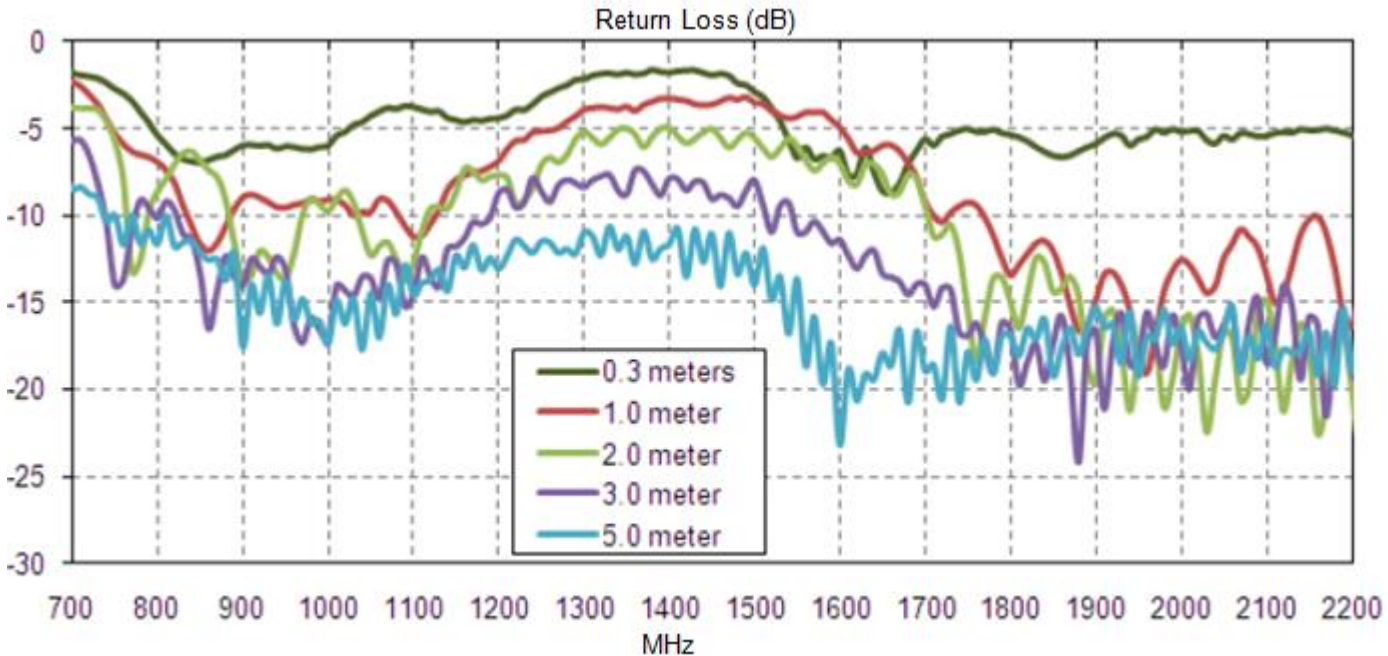


**Figure 2.** Return loss of MA520 Cellular Antenna in free space.

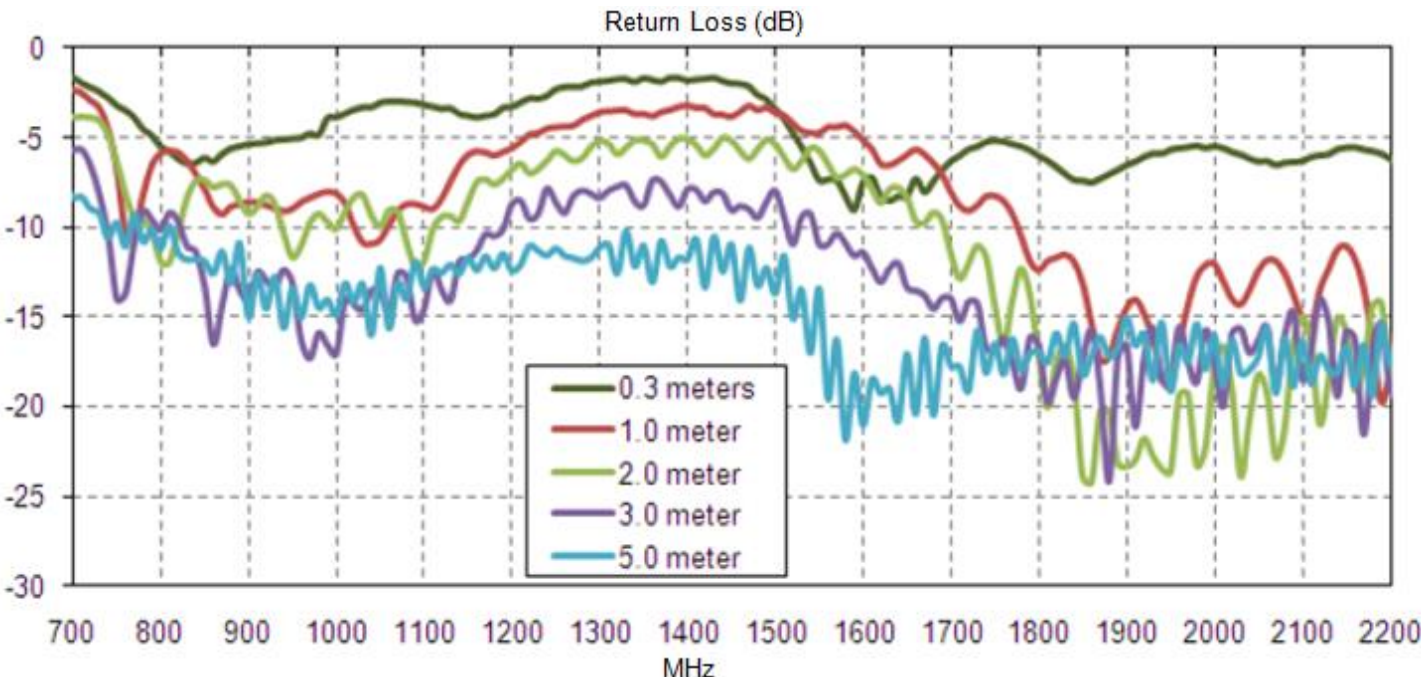

**Figure 3.** Return loss of MA520 Cellular Antenna on 30\*30 cm metal plate.

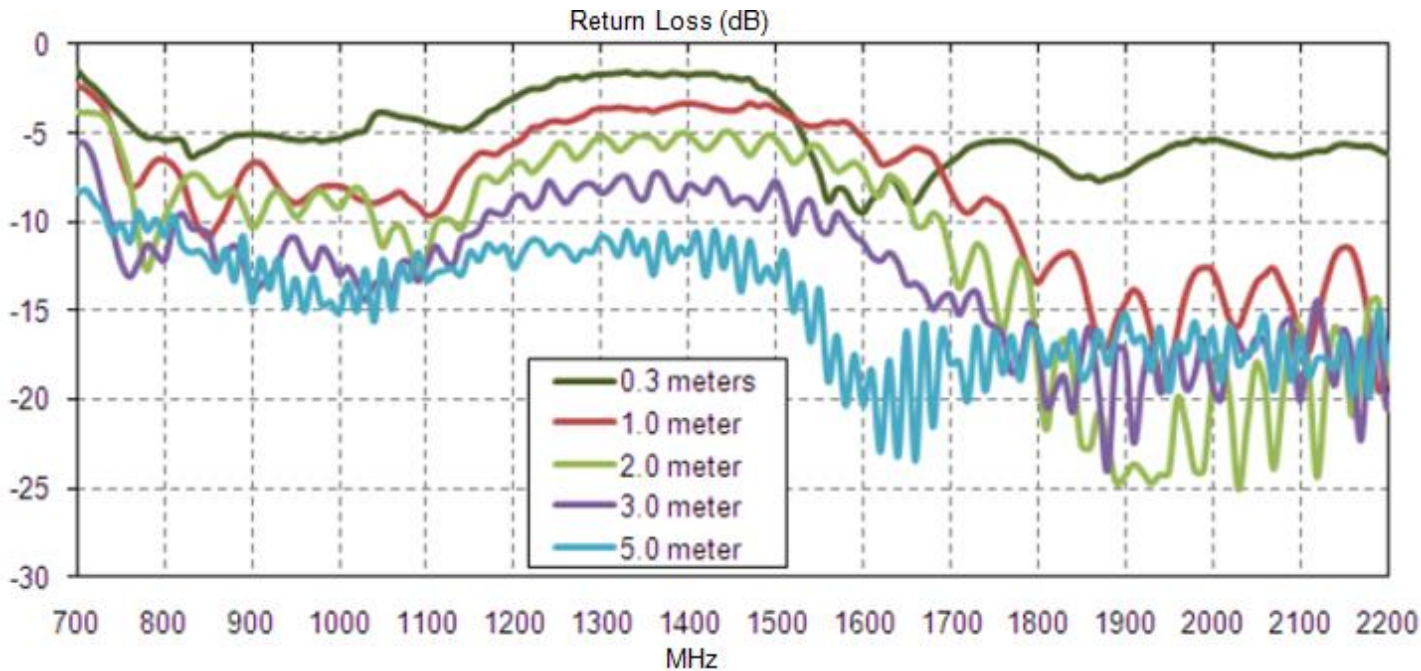


**Figure 4.** Return loss of MA520 Cellular Antenna on 60 \*60 cm metal plate.

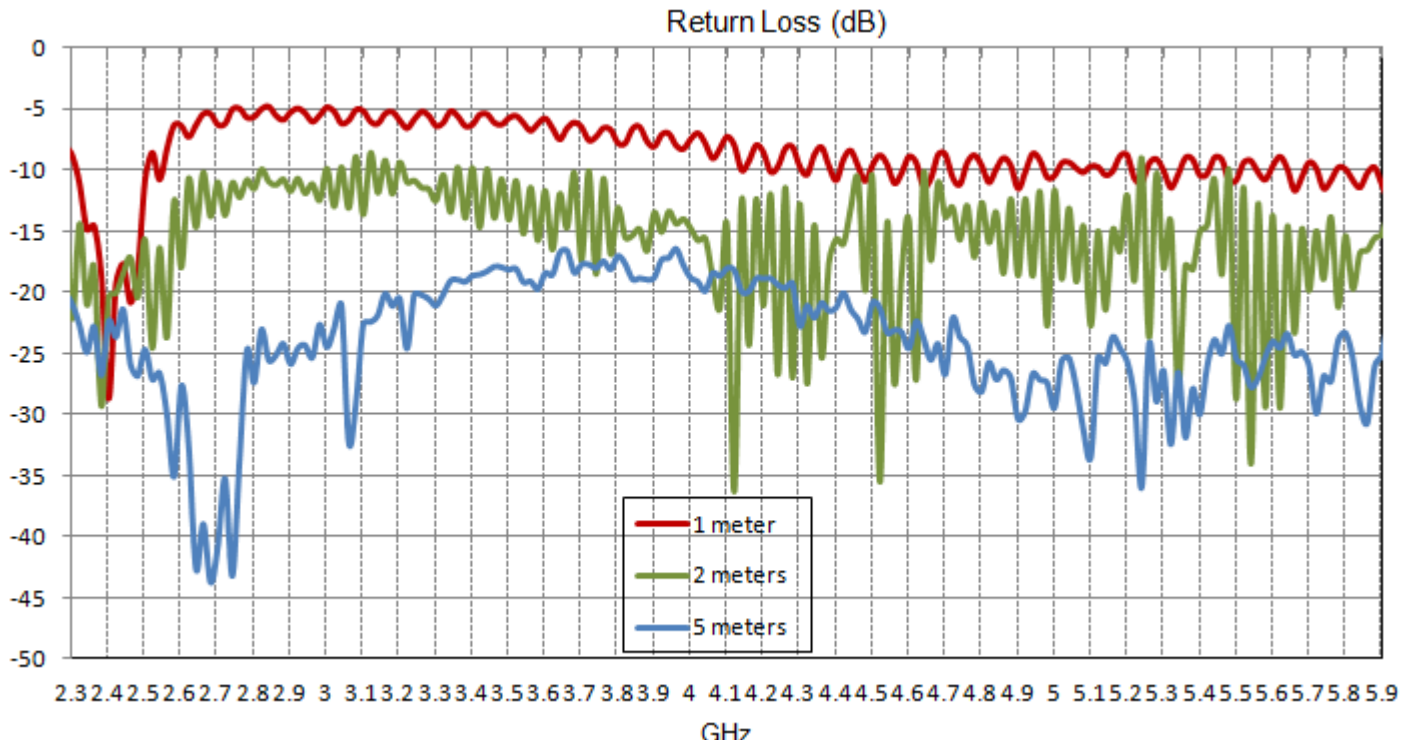


**Figure 5.** Return loss of MA520 2.4/5 GHz Antenna on 60\*60 cm metal plate.


**4.2. Efficiency**

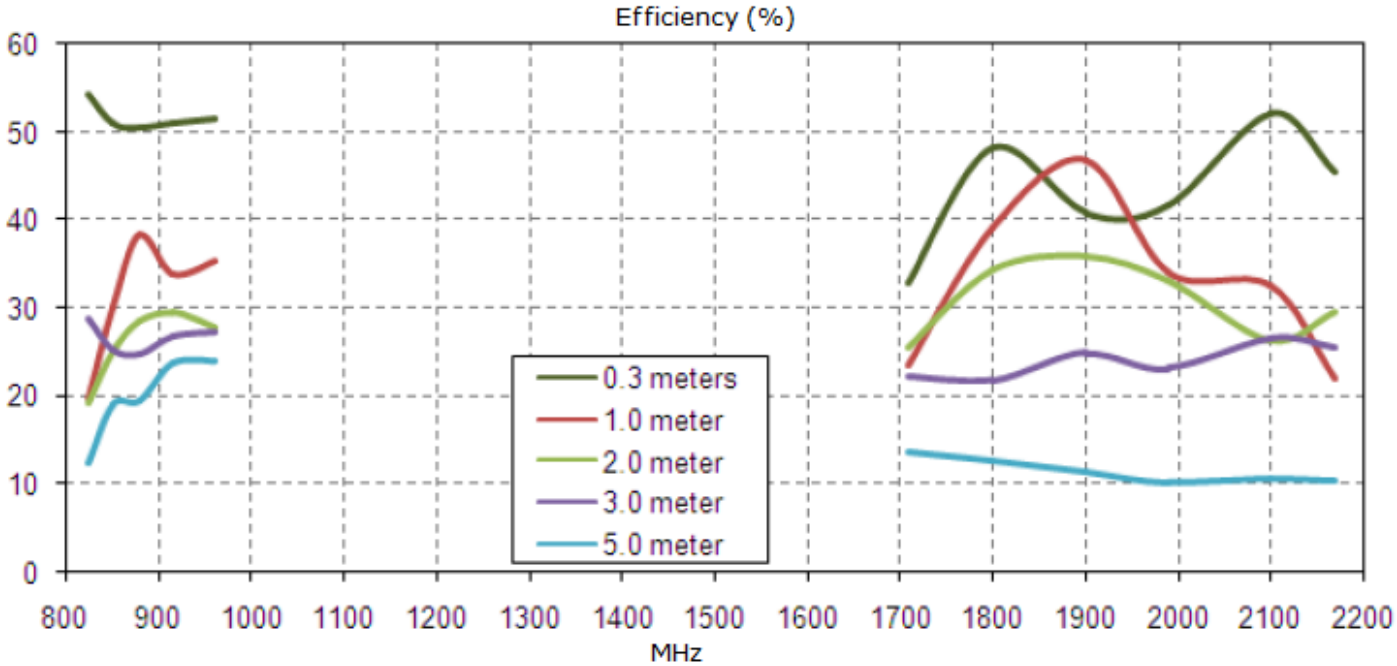


**Figure 6.** Efficiency of MA520 Cellular Antenna in free space.

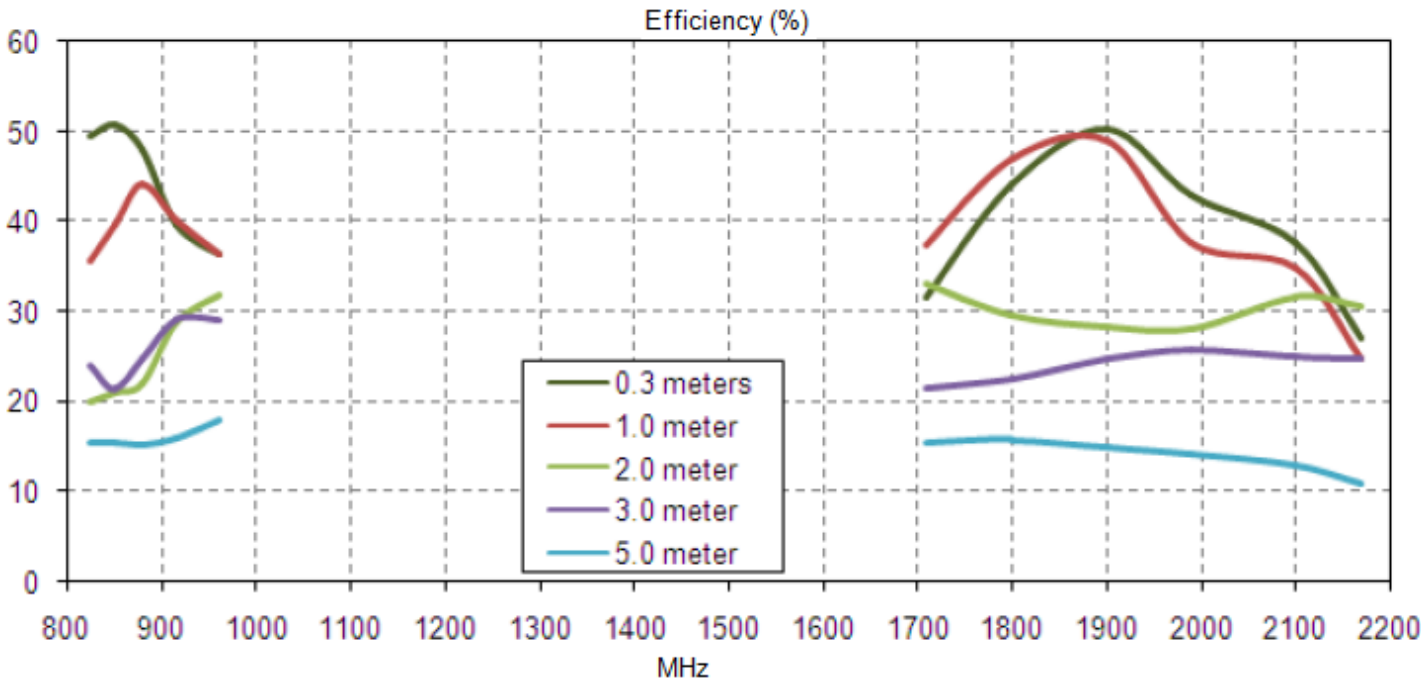

**Figure 7.** Efficiency of MA520 Cellular Antenna on 30\*30 cm metal plate.

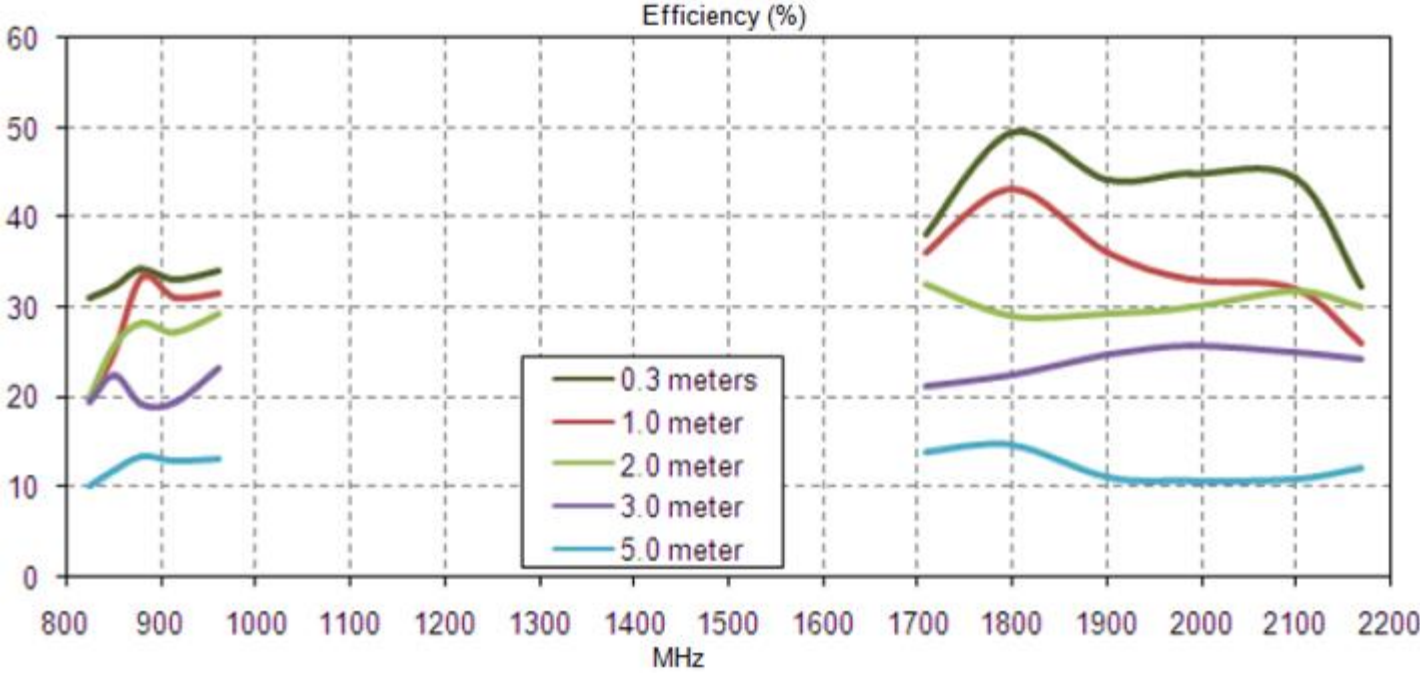


**Figure 8.** Efficiency of MA520 Cellular Antenna on 60\*60 cm metal plate.

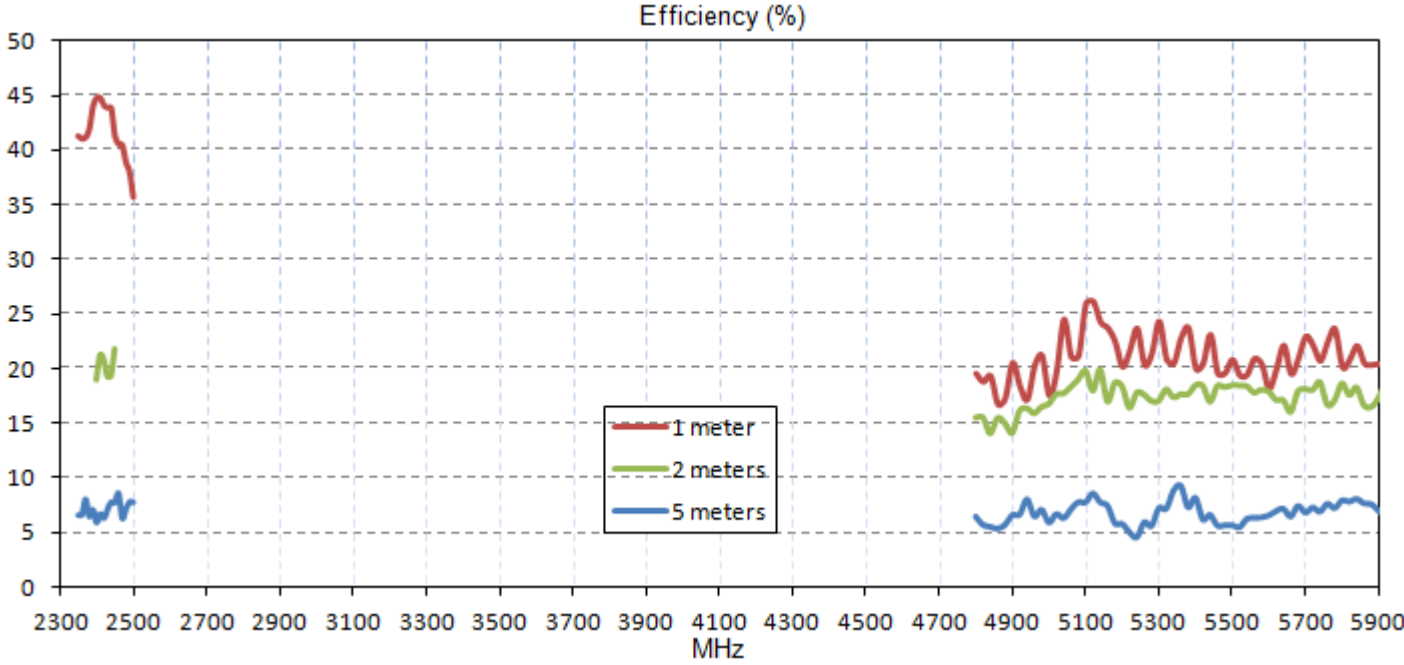


**Figure 9.** Efficiency of MA520 2.4/5 GHz Antenna on 60\*60 cm metal plate.



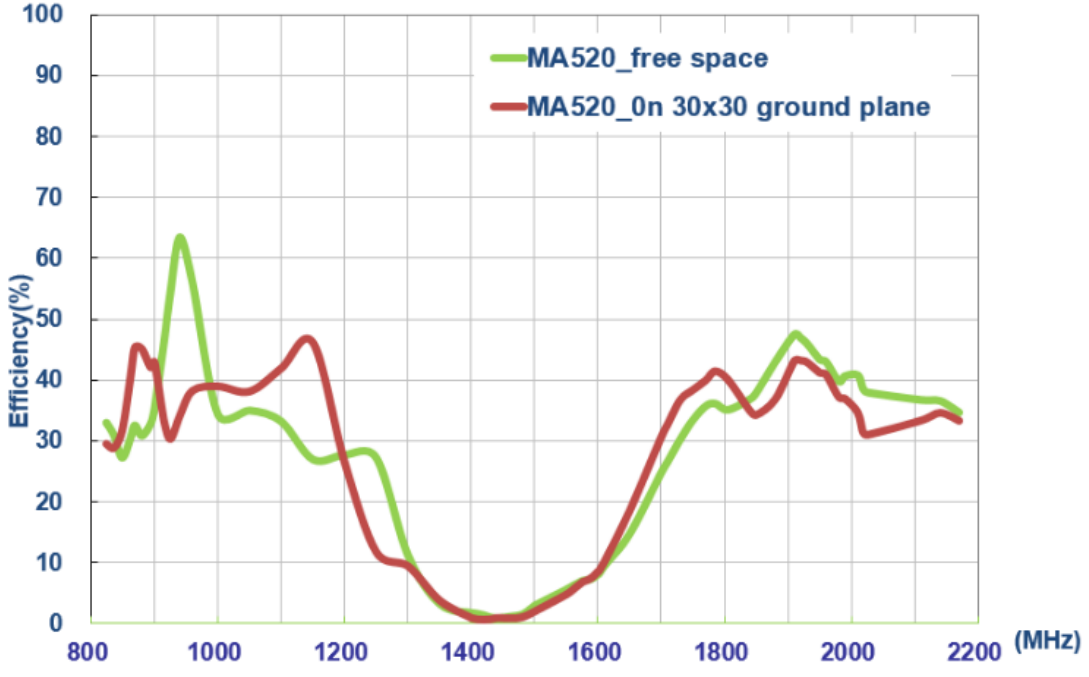


**Figure 10.** Efficiency of MA520 2.4/5 GHz Antenna from 960~1700MHz


**4.2. Gain**

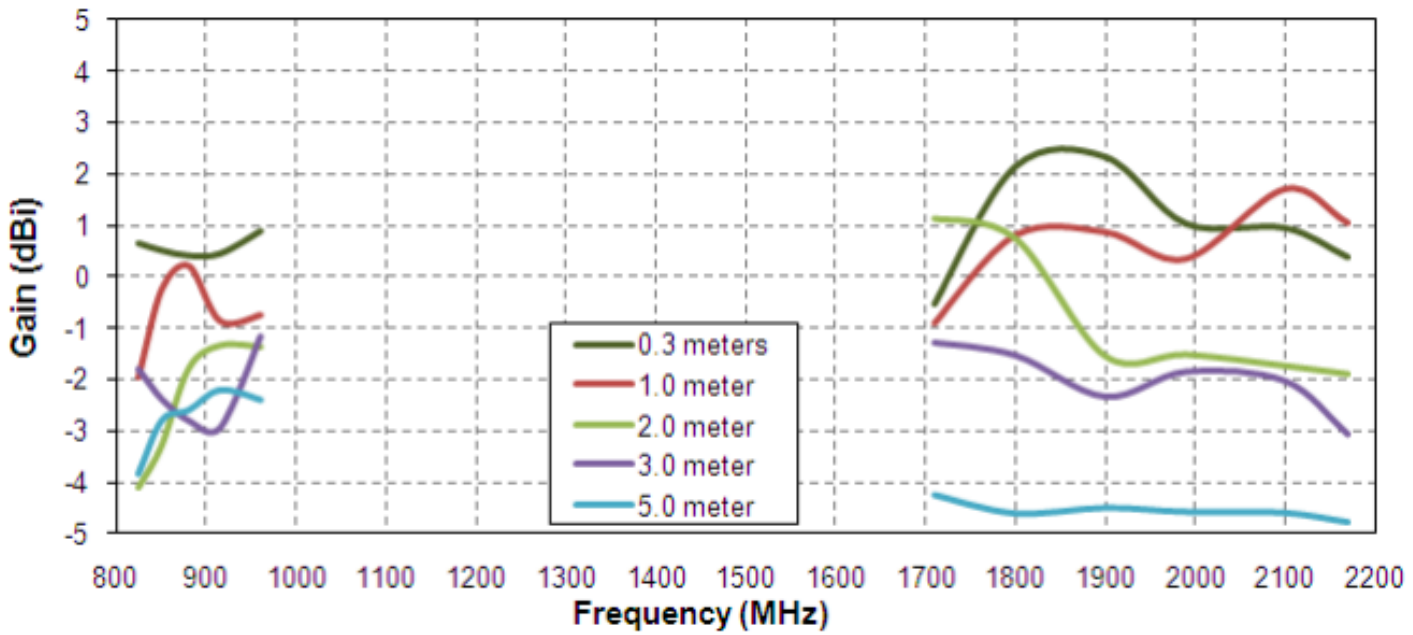


**Figure 11.** Gain of MA520 Cellular Antenna in free space.

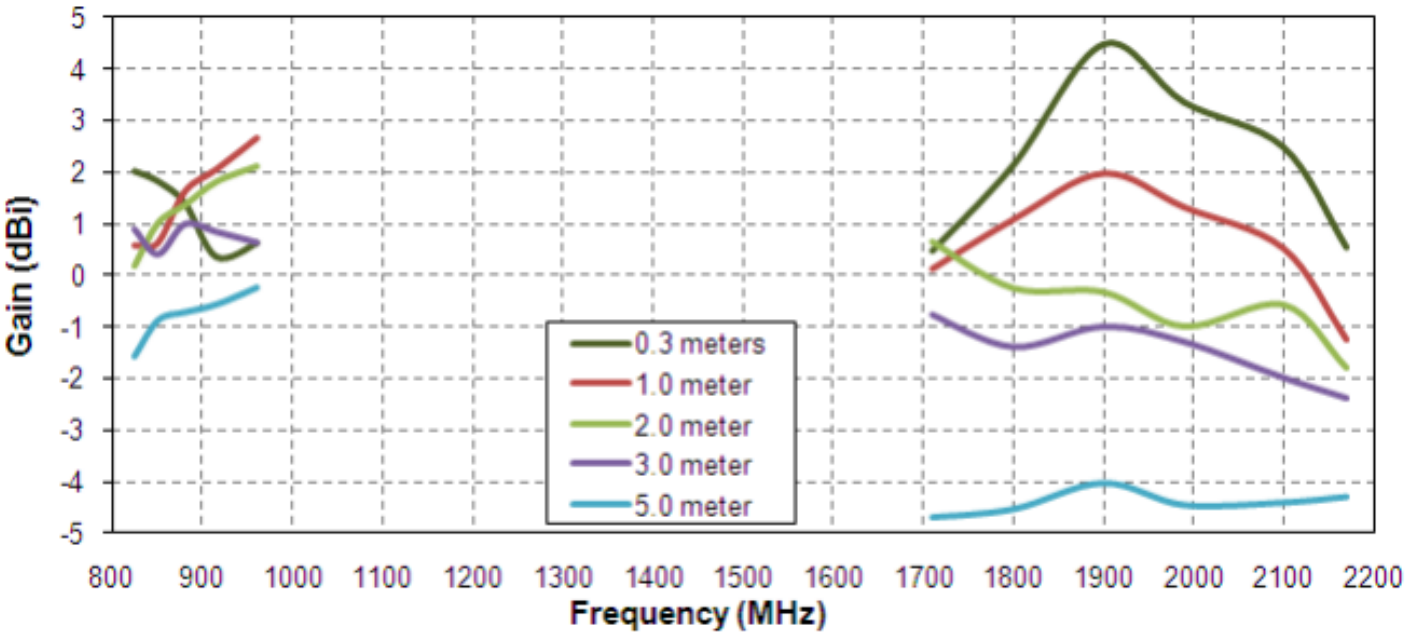

**Figure 12.** Gain of MA520 Cellular Antenna on 30\*30 cm metal plate.

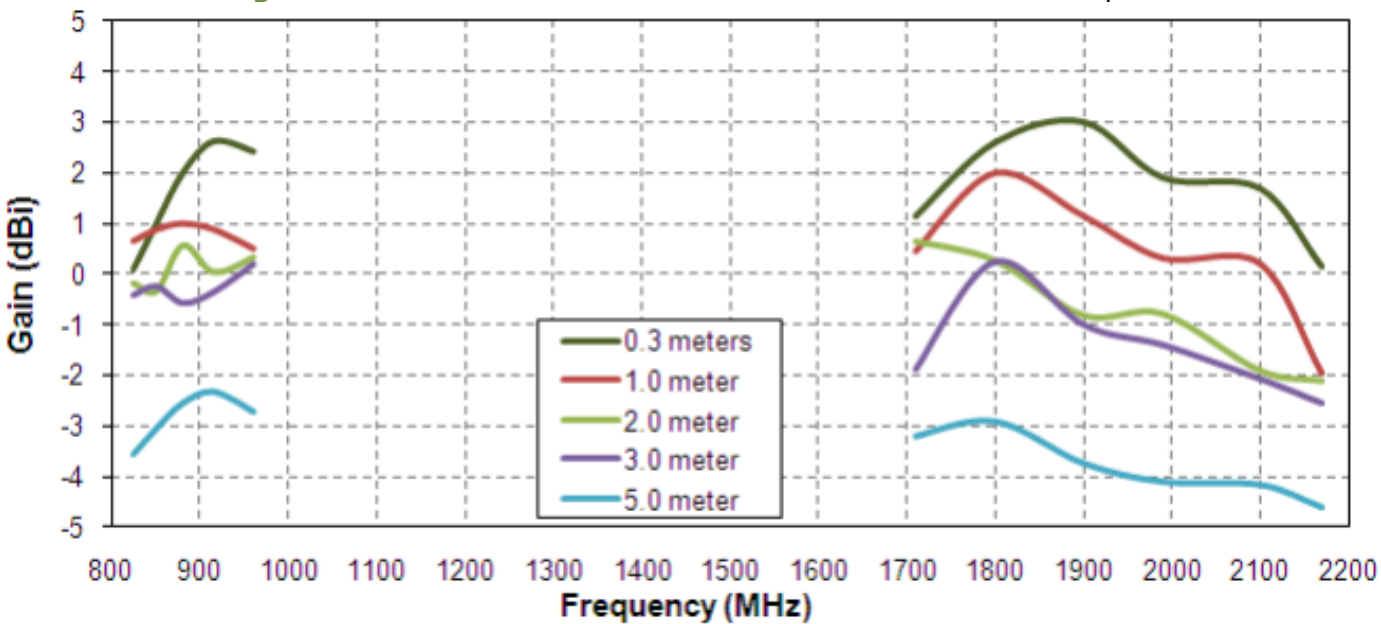


**Figure 13.** Gain of MA520 Cellular Antenna on 60\*60 cm metal plate.

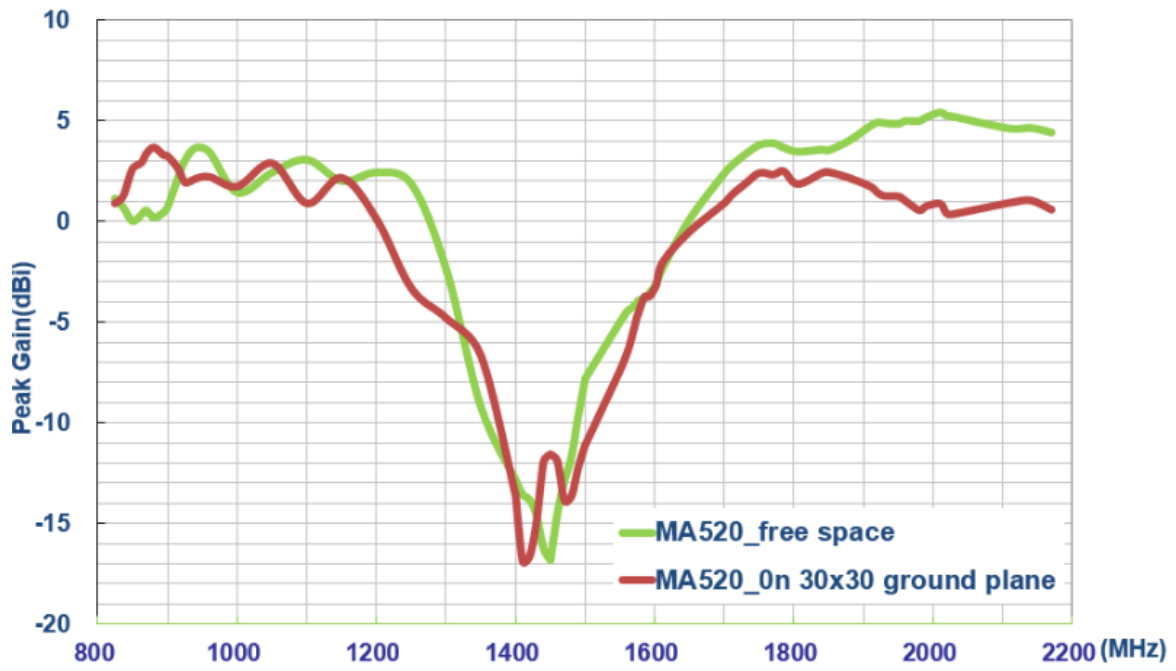


**Figure 14.** Gain of MA520 2.4/5 GHz Antenna from 960~1700MHz

## 5. Radiation Pattern


### 5.1 Radiation Pattern ( Free Space)

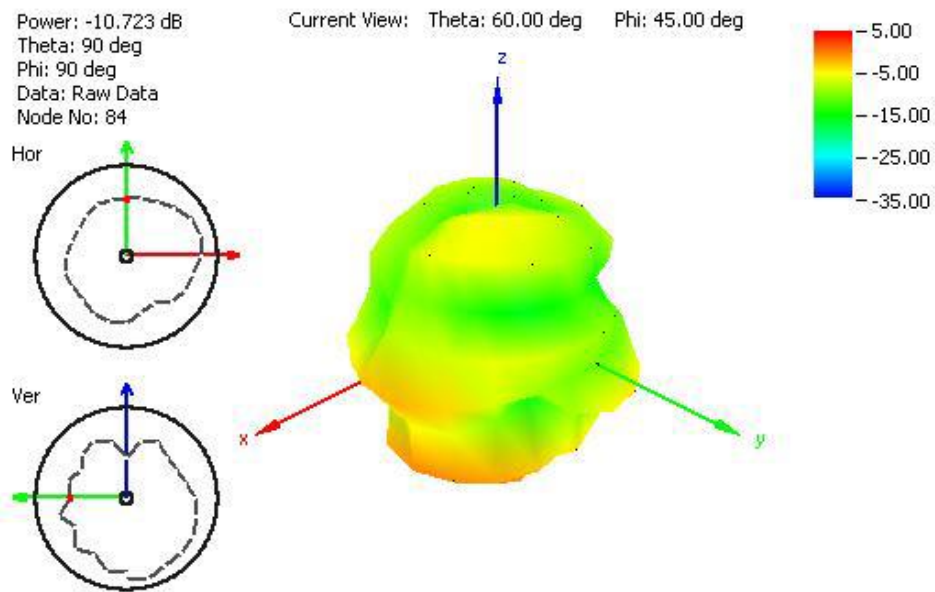


**Figure 15.** Radiation Pattern at 849 MHz in free space (cable length 2 meters).

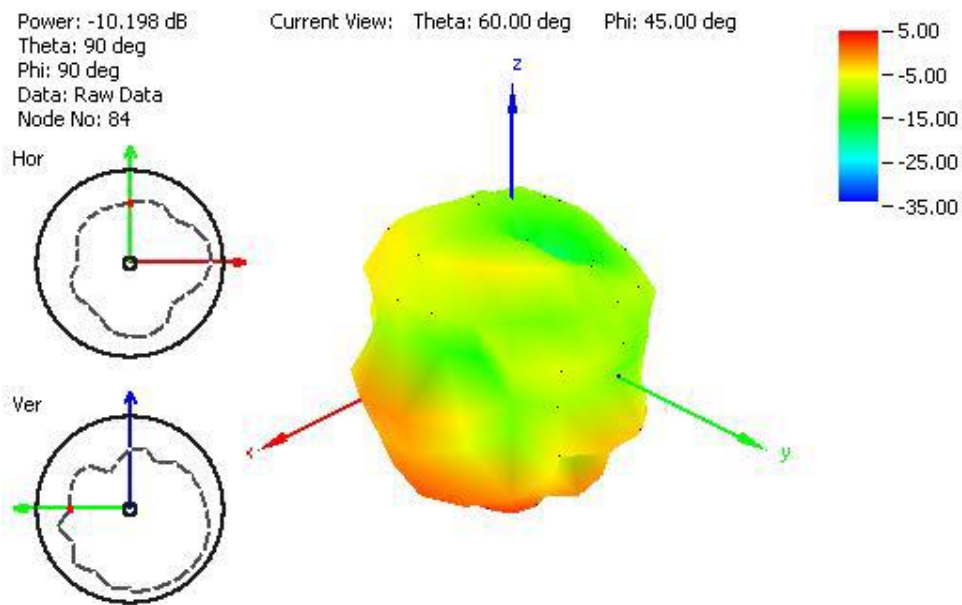


**Figure 16.** Radiation Pattern at 915 MHz in free space (cable length 2 meters).

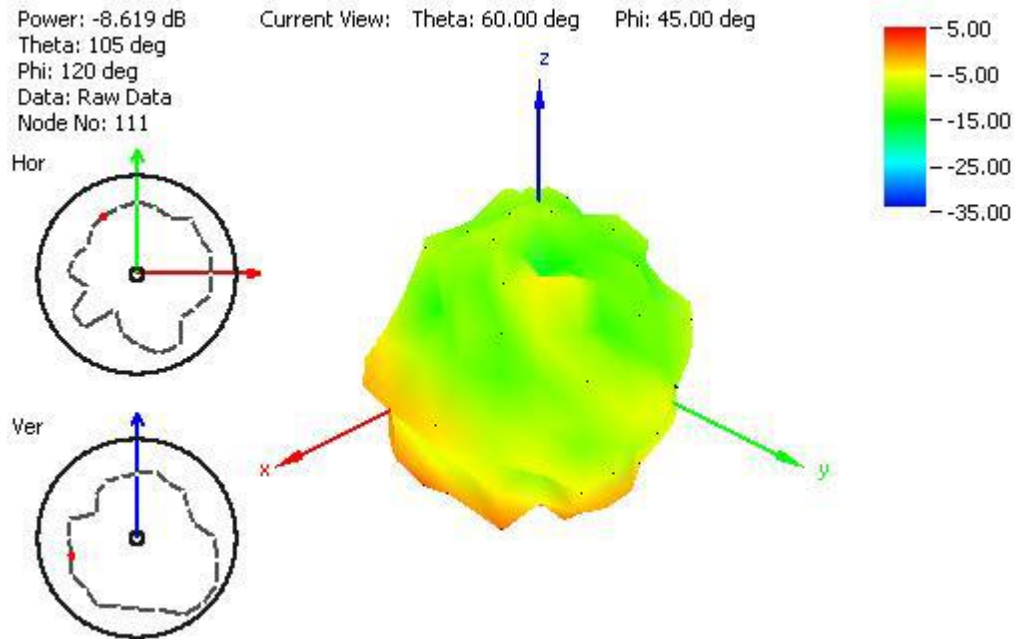

**Figure 17.** Radiation Pattern at 1805 MHz in free space (cable length 2 meters).

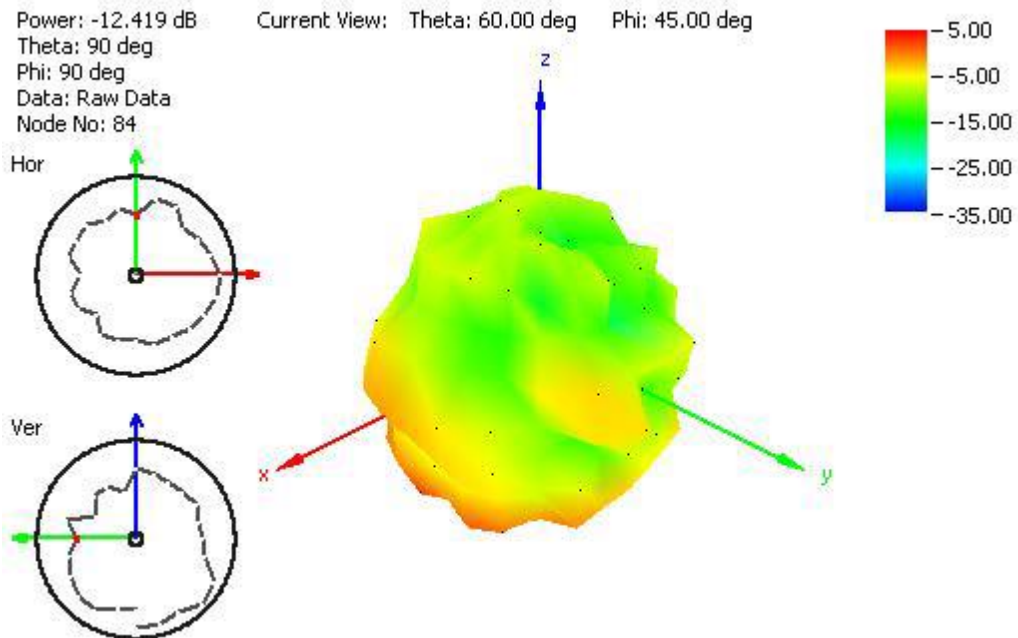


**Figure 18.** Radiation Pattern at 1910 MHz in free space (cable length 2 meters).

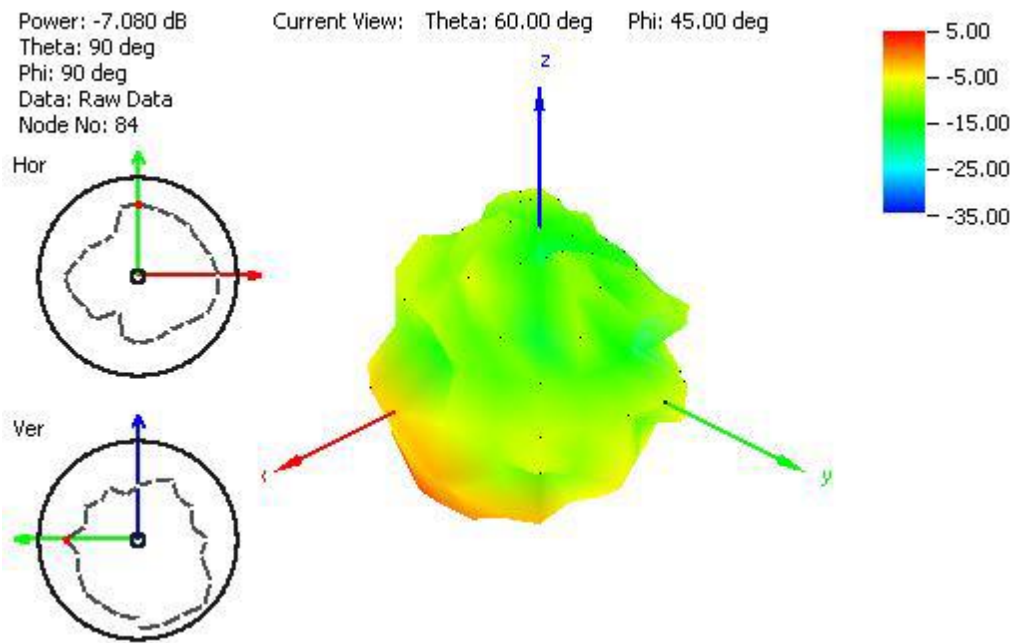


**Figure 19.** Radiation Pattern at 2110 MHz in free space (cable length 2 meters).


## 5.2 Radiation Pattern ( 30 \*30 mm Ground Plane)

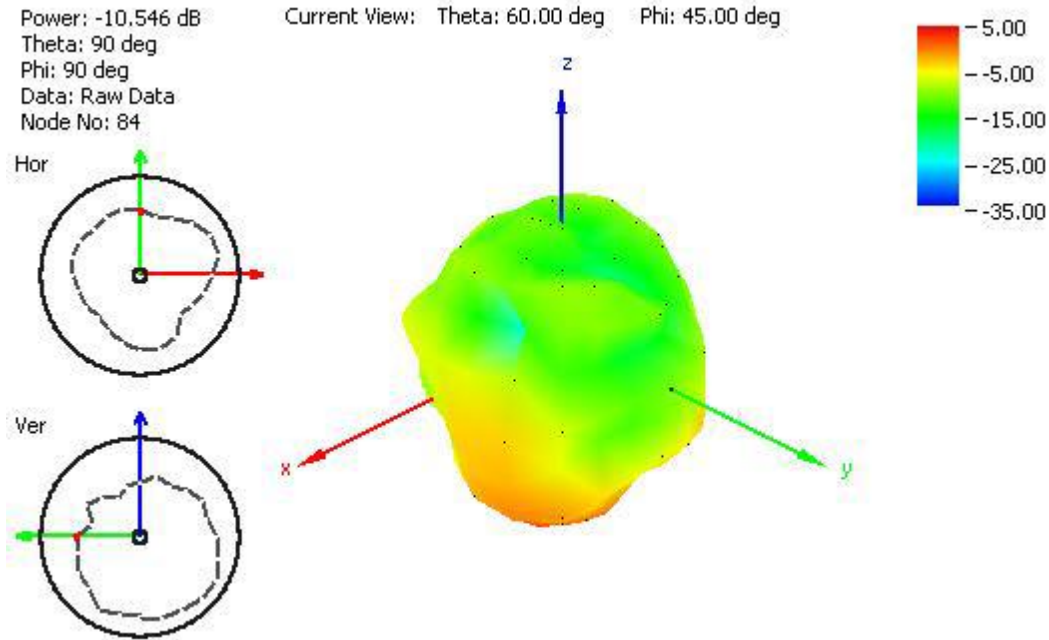


**Figure 20.** Radiation Pattern at 849 MHz (cable length 2 meters).

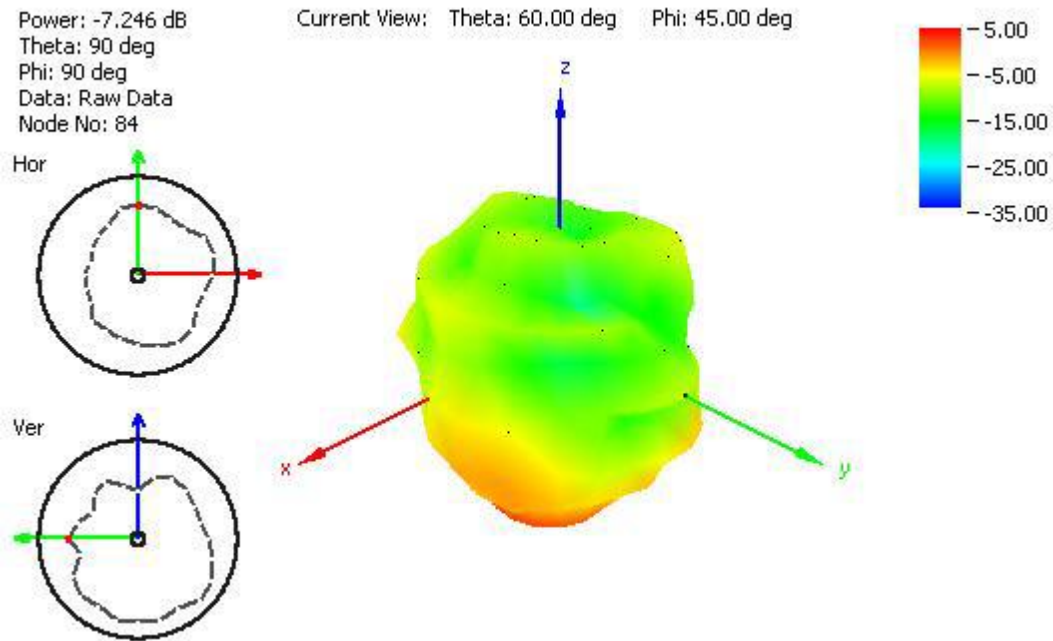

**Figure 21.** Radiation Pattern at 915 MHz (cable length 2 meters).

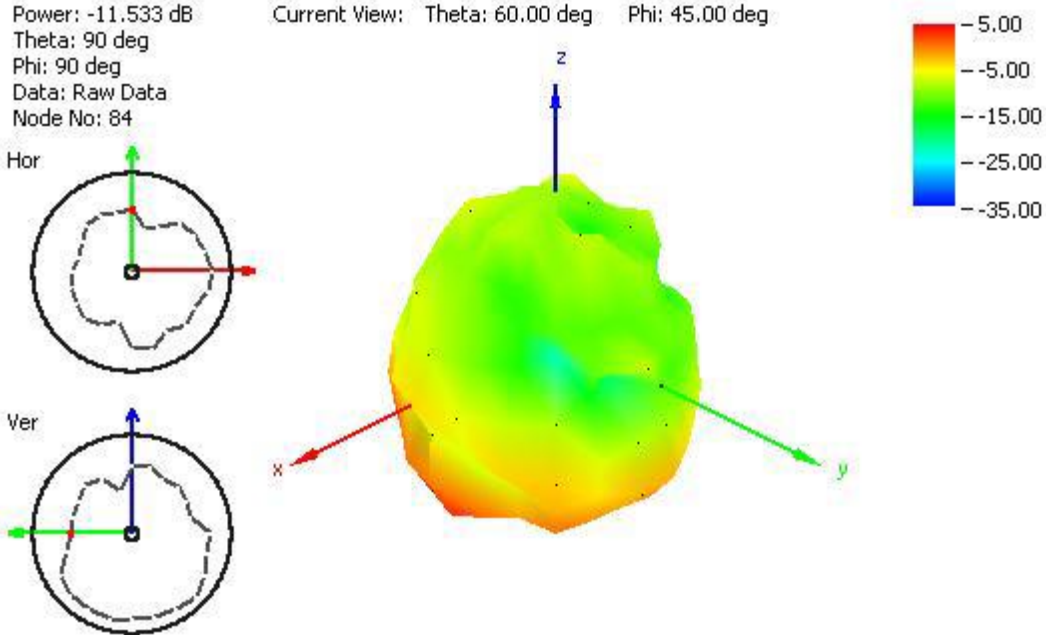


**Figure 22.** Radiation Pattern at 1805 MHz (cable length 2 meters).

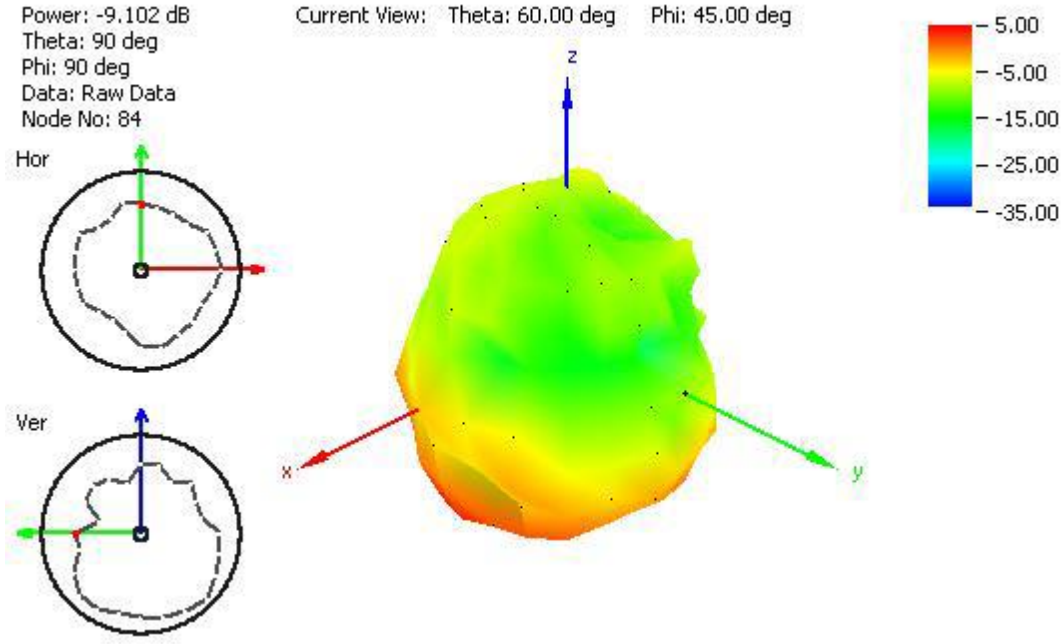


**Figure 23.** Radiation Pattern at 1910 MHz (cable length 2 meters).



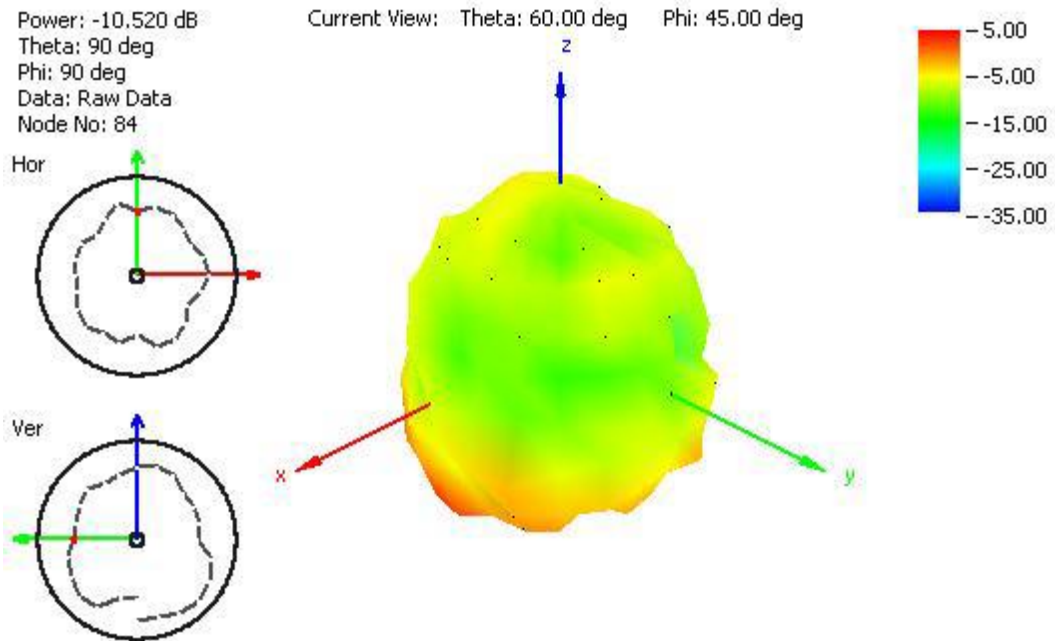


**Figure 24.** Radiation Pattern at 2110 MHz (cable length 2 meters).


### 5.3 Radiation Pattern ( 60 \*60 mm Ground Plane)

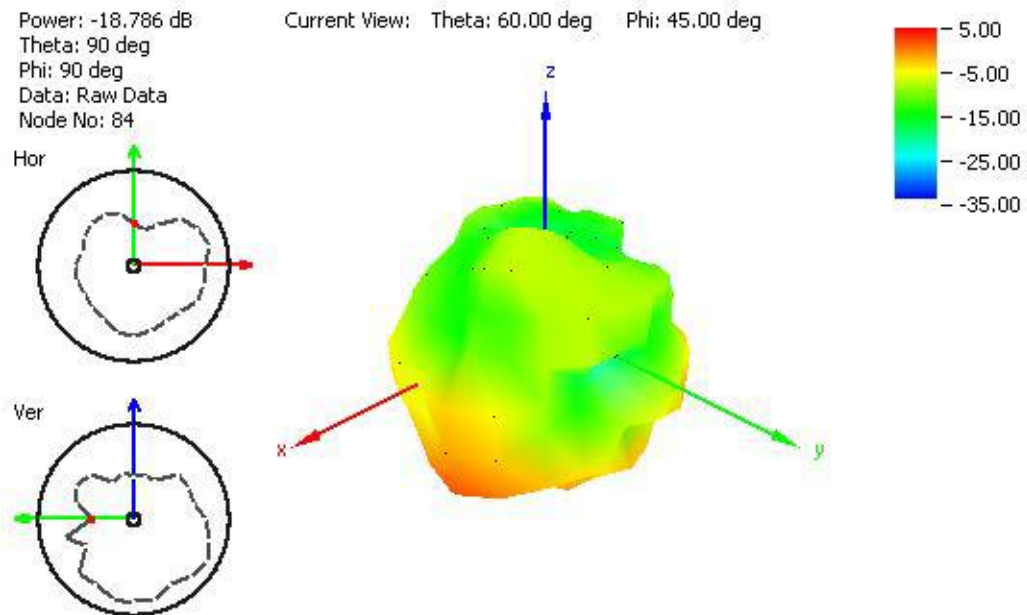


**Figure 25.** Radiation Pattern at 849 MHz (cable length 2 meters).

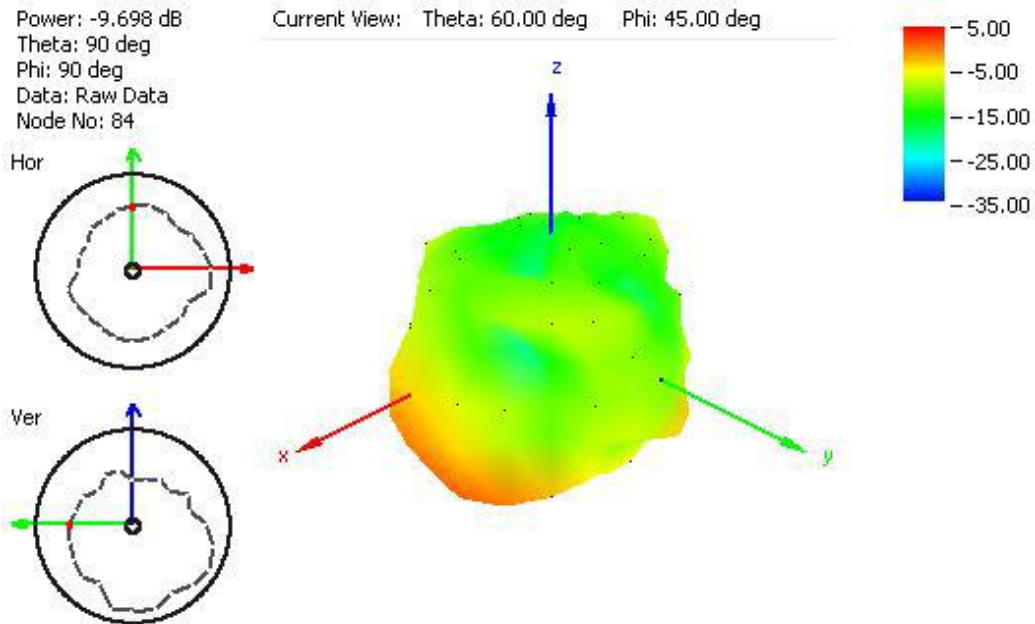


**Figure 26.** Radiation Pattern at 915 MHz (cable length 2 meters).

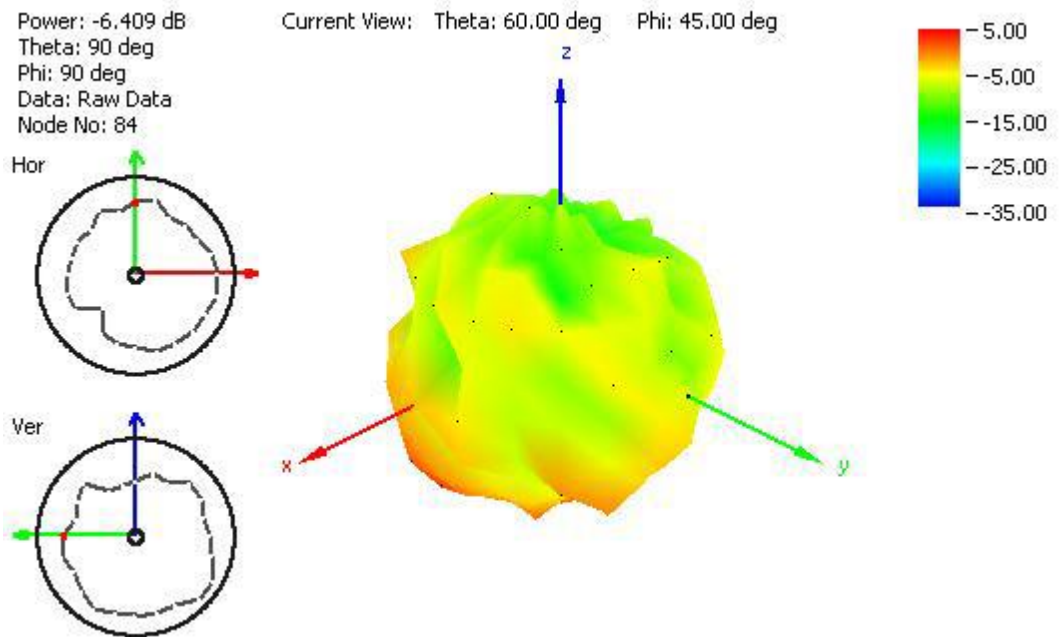

**Figure 27.** Radiation Pattern at 1805 MHz (cable length 2 meters).

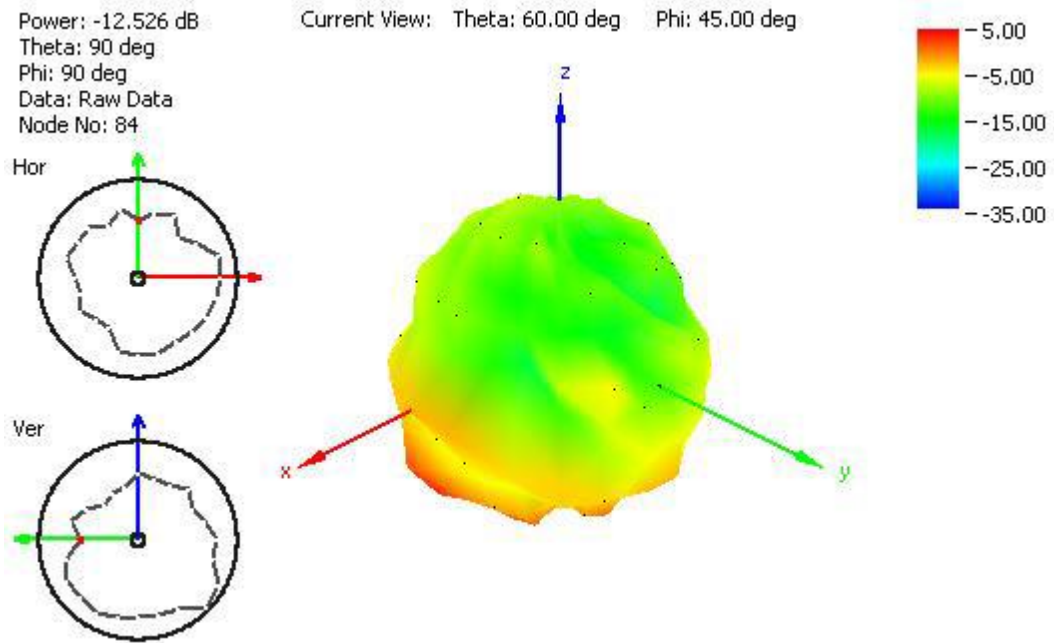


**Figure 28.** Radiation Pattern at 1910 MHz (cable length 2 meters).

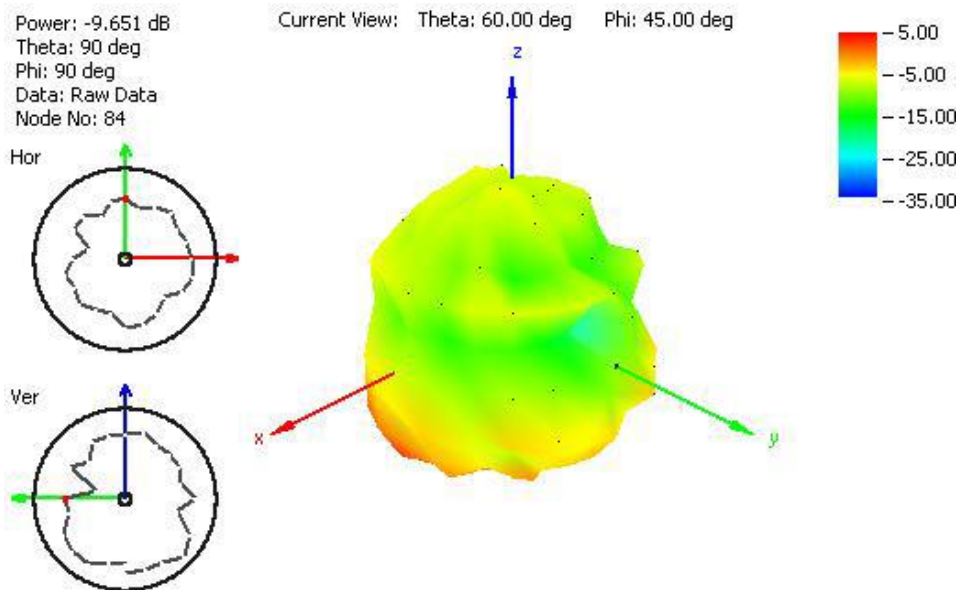


**Figure 29.** Radiation Pattern at 2110 MHz (cable length 2 meters).

## 5.4 Radiation Pattern 2.4/5 GHz ( 60 \*60 mm Ground Plane)

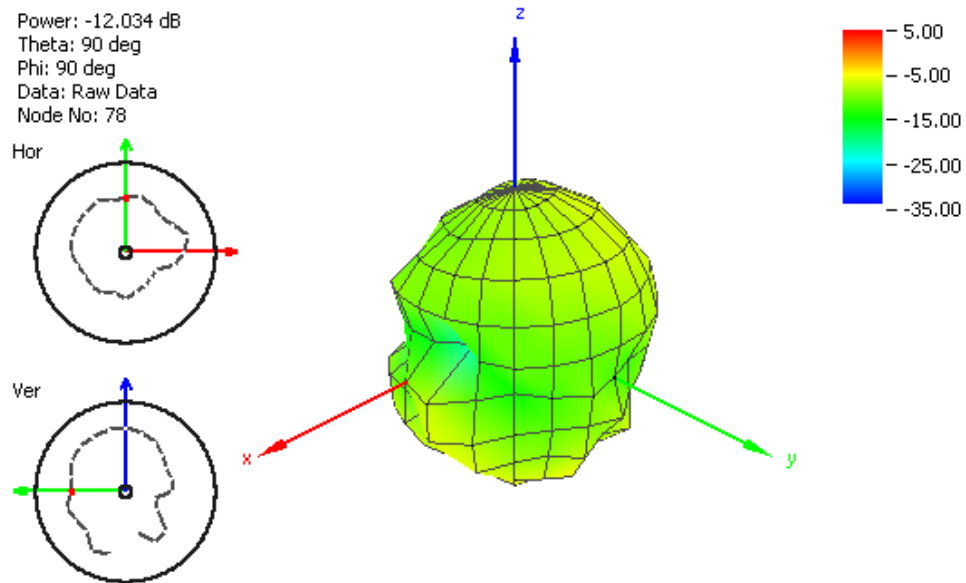


**Figure 30.** Radiation Pattern Antenna at 2450 MHz (cable length 2 meters)

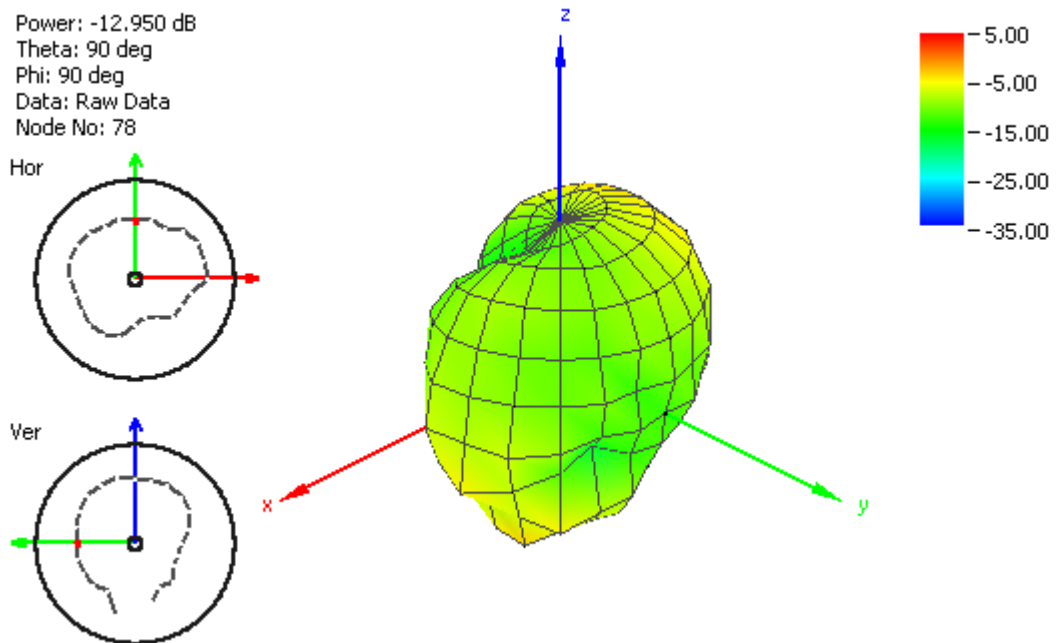


**Figure 31.** Radiation Pattern Antenna at 5500 MHz (cable length 2 meters)

## 6. Drawings


Top View

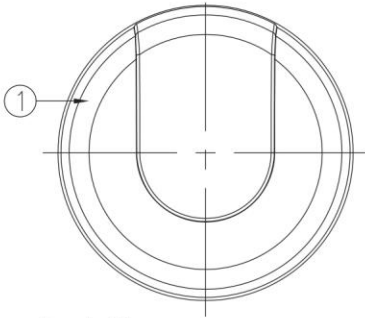



Bottom Thread View




Front View

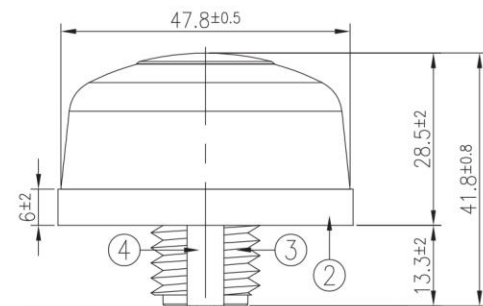


Side View

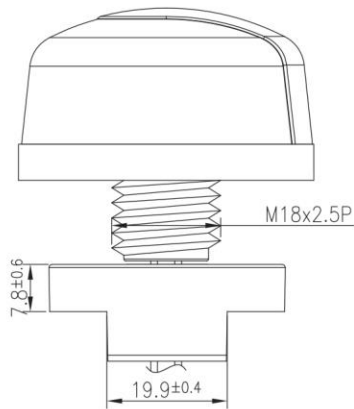

Detail A




Detail B

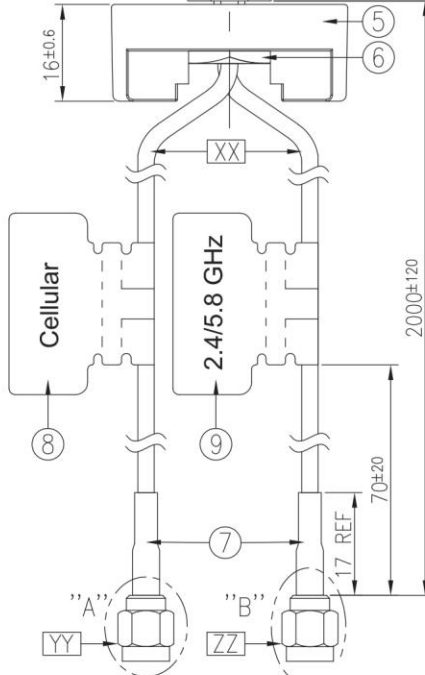


	Name	Material	Finish	QTY
1	Housing	PC	Black	1
2	Double Sided Adhesive (Black Foam)	3M 9448HK+CR4305	White Liner	1
3	Metal Base	Zinc Alloy	Ni Plated	1
4	Rubber Stopper	Silicone Rubber	Black	1
5	Outer Nut Cover	ASA	Black	1
6	M18 Inner Nut Cut	Steel Carbon	Zn Plated	1
7	Heat Shrink Tube	PE	Black	2
8	Cellular Label	PEPA	Blue	1
9	2.4/5.8 GHz Label	PEPA	Teal Green	1

	Name	Material	Finish	QTY
XX	Cable Type	FEP	Black	2
YY	Connector Type	SMA(M)ST	Au Plated	1
ZZ	Connector Type	RP-SMA(M)ST	Au Plated	1

## 6.1 Connector Detail

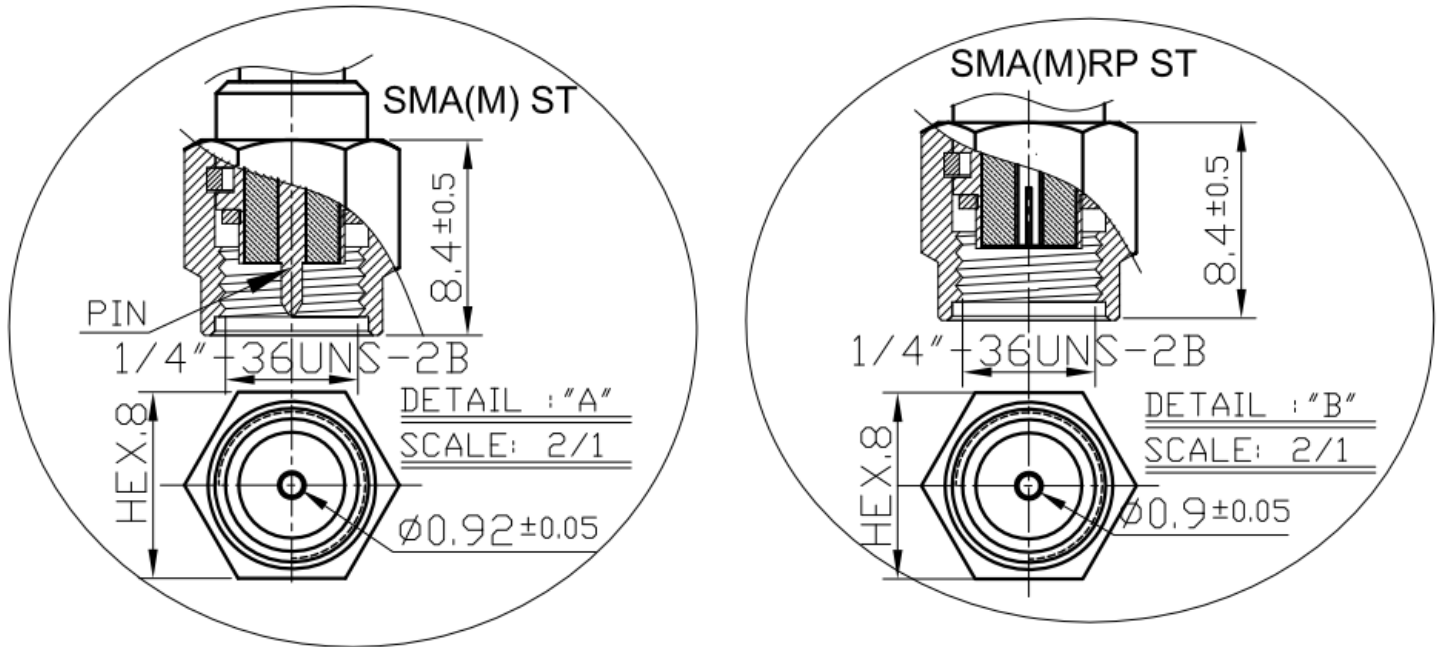


## 6.2 Installation

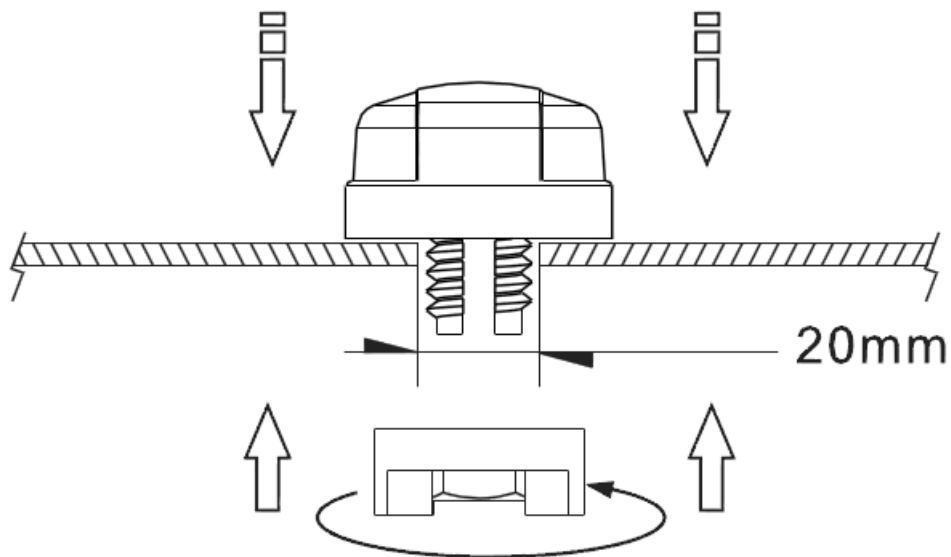

Recommended torque for mounting is 95Nm or 70ftlbs  
 Maximum torque for mounting is 135.6Nm or 100ft lbs

# 7. Packaging

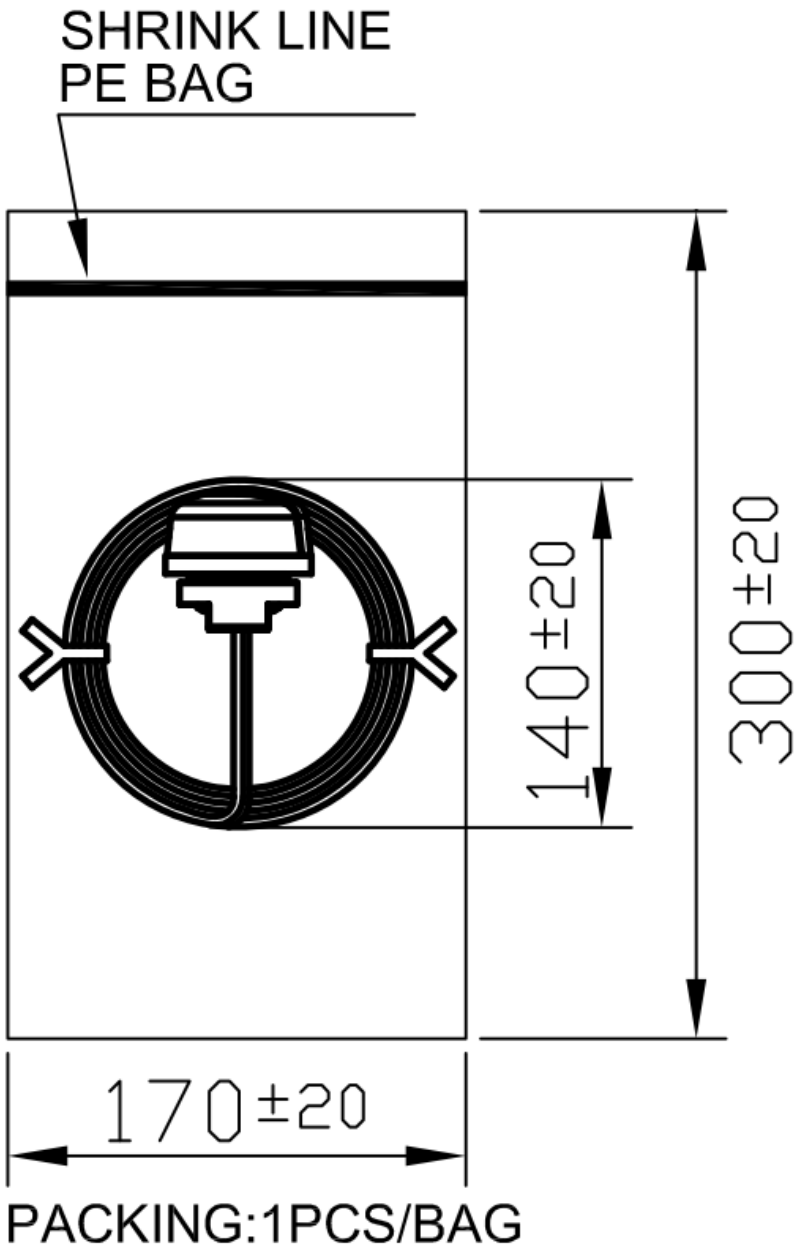

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.