

CABLE

(40-pin to 34-pin)

MODEL: MCN34-FR-[1]

ORDERING INFORMATION

- Code number: MCN34-FR-[1]
- Specify a code from below for [1].
(e.g. MCN34-FR-10)

CONNECTOR, SIDE A

F: Fujitsu

CONNECTOR, SIDE B

R: Omron

[1] CABLE LENGTH

03: 30 cm (11.8 in.)

05: 50 cm (19.7 in.)

10: 1 m (3.3 ft.)

30: 3 m (9.8 ft.)

RELATED PRODUCTS

- Analog I/O module (model: 60C, 60D, 60F, 60M, 60S)
- Multi-Transmission Module (MODEL: 22LA1-3A1, 22LA1-3C1)

GENERAL SPECIFICATIONS

Connector, Side A

Connector model: FCN-361J040-AU

Cover model: FCN-360C040-B

Connector, Side B

Connector model: XG5M-3435-N

Cover model: XG5S-3422

Cable: Shielded cable with 34 core cables

INSTALLATION

Weight

MCN34-FR-03: 90 g (0.20 lb)

MCN34-FR-05: 120 g (0.26 lb)


MCN34-FR-10: 180 g (0.40 lb)

MCN34-FR-30: 450 g (0.99 lb)

PERFORMANCE


Dielectric strength: 500 V AC @ 1 minute

EXTERNAL DIMENSIONS & CONNECTOR PIN ASSIGNMENT mm (inch)

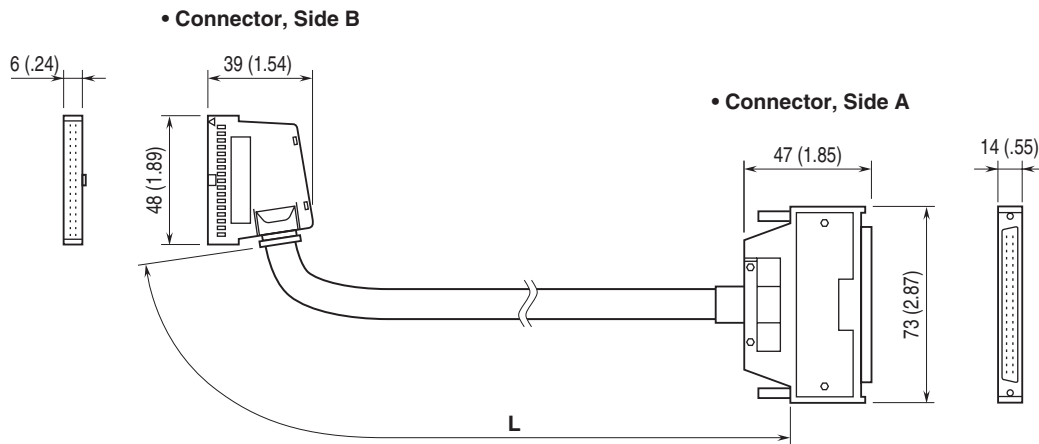


	MCN34-03	MCN34-05	MCN34-10	MCN34-30
L	30 cm (11.8 in.)	50 cm (19.7 in.)	1 m (3.3 ft.)	3 m (9.8 ft.)

■ CONNECTOR PIN ASSIGNMENT

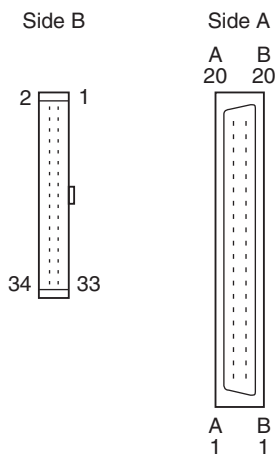

■ WIRING DIAGRAM

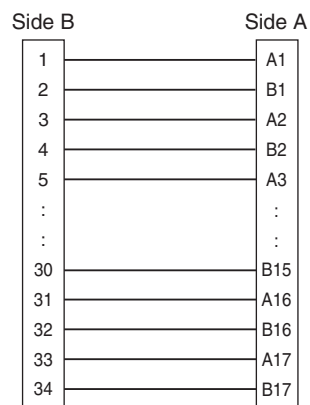

Pins No. A18 – B20 on Side A are not connected.



Specifications are subject to change without notice.