

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20





© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED(ECR-18-005350)	23.APR'18	CJ	GC

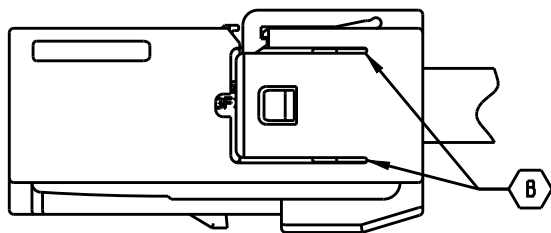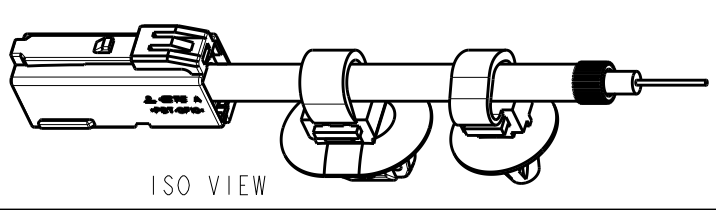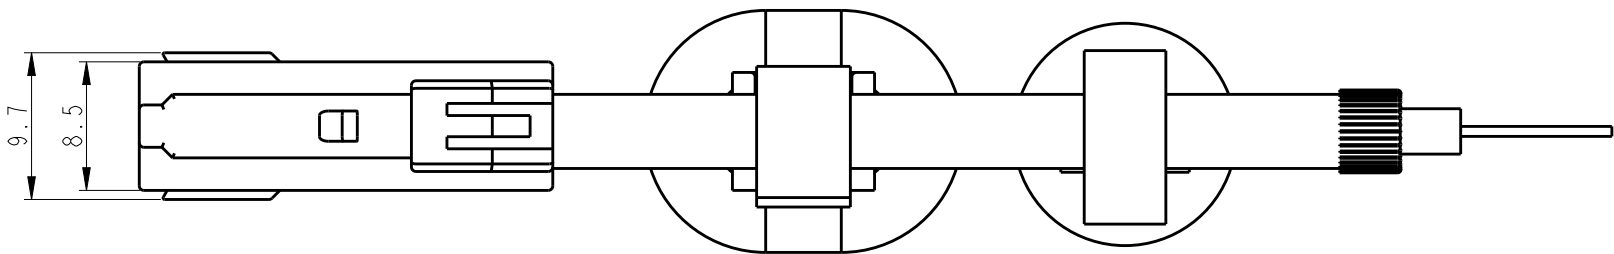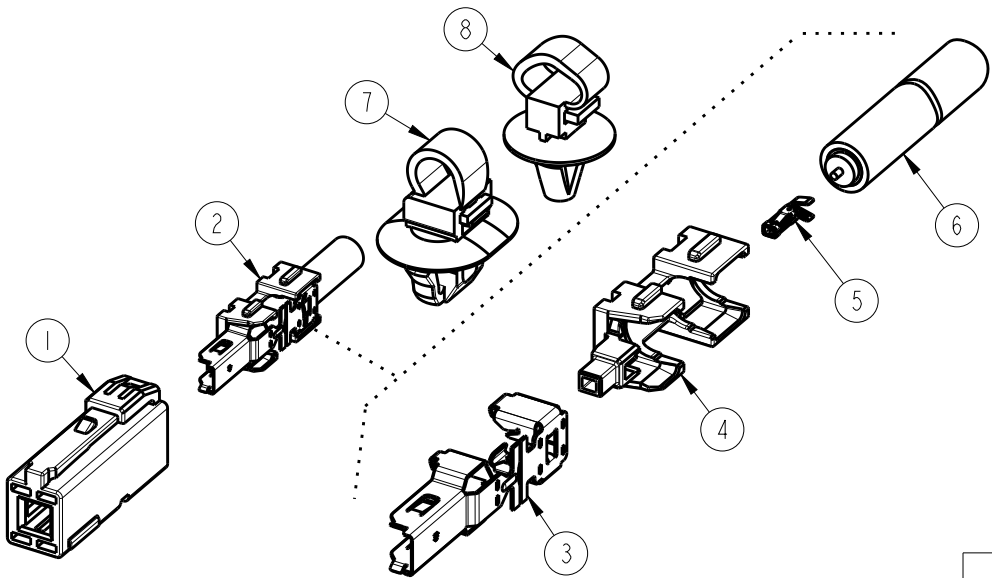

NOTE

1. LENGTH "L": 216mm $\pm$ 4
CABLE : RG-58 C/U COAXIAL CALBLE
JACKET DIA : 4.9mm~5.0mm
CONDUCTOR : 19/0.18 STRAND
2. DELIVERY CONDITION: SECONDARY LOCK IS CLOSED.
3. THE MATING HEADER ASS'Y P/N:2219632.
4. GENERAL TOLRANCE: $\pm$ 0.3
5. BAND CABLE (KUM P/N:GB100-12020-C01,BLACK)
-PANEL HOLE: $\varnothing$ 7X12
-PANEL THICKNESS: 1st LOCK t=1.3~2.0
2nd LOCK t=0.5~1.2
6. BAND CABLE (KUM P/N:HB010-05120-C01E,GRAY)
-PANEL: $\varnothing$ 7
-PANEL THICKNESS: 1st LOCK t=1.4~2.0
2nd LOCK t=0.7~1.3
7. BAND CABLE CUTTING LENGTH : 3~5mm. ACCORDING TO ES91101-00
8. BRAID BACK FOLDING: BRAID STRAIGHT ALIGNMENT
9. PACKING: EMBOSS TRAY IN BOX


NO	COLOR	FINISH	MATERIAL	DESCRIPTION	P/NO	Q'TY
8	GRAY	-	-	BAND CABLE	HB010-05120-C01E	1
7	BLACK	-	-	BAND CABLE	GB100-12020-C01	1
6	BLACK	-	-	COAX. CABLE	2219685-1	1
5	-	POST-TIN,GOLD	PMC26	REC. CONTACT	2005002-3	1
4	GRAY	-	PBT-GF30	REC. DIELECTRIC	1897795-3	1
3	-	POST-TIN	PMC26	REC. SHIELD	1897796-2	1
2	-	-	-	PLUG KIT ASS'Y	2219684-1	-
1	BLACK	-	PBT-GF10	IP PLUG HSG	2219683-2	1

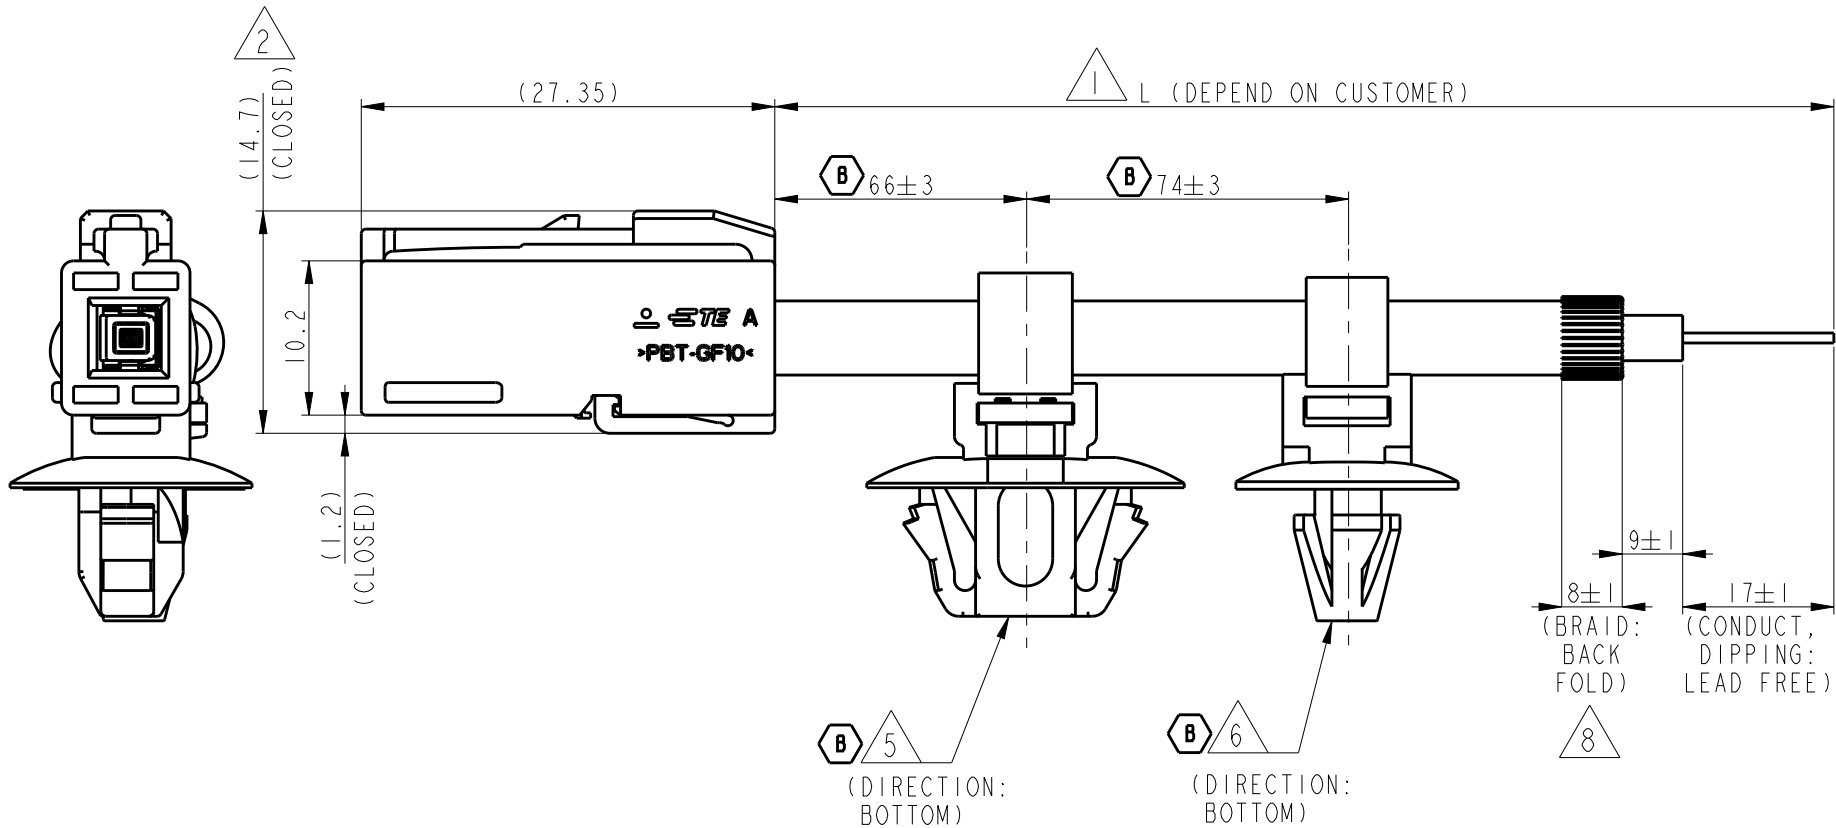

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	$\pm$ 0.1
1 PLC	$\pm$ 0.1
2 PLC	$\pm$ 0.01
3 PLC	$\pm$ 0.001
4 PLC	$\pm$ 0.0001
ANGLES	$\pm$ 0.1

MATERIAL

FINISH

DWN

CJ CHOI

CHK

GC KWON

APVD

GC KWON

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

RESTRICTED CUSTOMER



TE Connectivity

NAME

-

RF IP PLUG CABLE ASS'Y, LARGE

SIZE

CAGE CODE

DRAWING NO

A3 00779

C-2219633

RESTRICTED TO

-

SCALE

2:1

SHEET

1 OF 1

REV

B