CATALOG NUMBER	MATERIAL NUMBER	CABLE RANGE	LENGTH "M"	N.P.T. FITTING SIZE	FORM SIZE	UL LISTED	CSA APPROVED	PRODUCT SELECTION NUMBER
36310	1300970197	.187-.250 / 4.75-6.35	4.250±0.500 / 107.95±12.70	1/2	2	UL	CSA	PG404-45
36312	1300970198	.250-.375 / 6.35-9.53	4.250±0.500 / 107.95±12.70			UL	CSA	PG406-45
36314	1300970199	.375-.500 / 9.53-12.70	6.250±0.500 / 158.75±12.70			UL	CSA	PG408-45
36316	1300970200	.500-.625 / 12.70-15.88	6.500±0.500 / 165.10±12.70			UL	CSA	PG410-45
36825	-------	.187-.250 / 4.75-6.35	4.125±0.500 / 104.78±12.70	3/4	3	---	---	PG604-45
36317	1300970201	.250-.375 / 6.35-9.53	4.250±0.500 / 107.95±12.70			UL	CSA	PG606-45
36319	1300970202	.375-.500 / 9.53-12.70	6.000±0.500 / 154.40±12.70			UL	CSA	PG608-45
36321	1300970203	.500-.625 / 12.70-15.88	6.250±0.500 / 158.75±12.70			UL	CSA	PG610-45
36323	1300970204	.625-.750 / 15.88-19.05	8.500±1.000 / 209.55±25.40			UL	CSA	PG612-45
36826	1300970629	.375-.500 / 9.53-12.70	5.750±0.500 / 146.05±12.70	1	4	---	CSA	PG809-45
36827	1300970294	.500-.625 / 12.70-15.88	5.750±0.500 / 146.05±12.70			---	CSA	PG811-45
36326	1300970205	.625-.750 / 15.88-19.05	6.500±0.500 / 165.10±12.70			UL	CSA	PG812-45
36328	1300970206	.750-.875 / 19.05-22.23	8.500±1.000 / 209.55±25.40			UL	CSA	PG814-45
36330	1300970207	.875-1.000 / 22.23-25.40	9.250±1.000 / 234.95±25.40			UL	CSA	PG816-45

GRIP ASSEMBLED

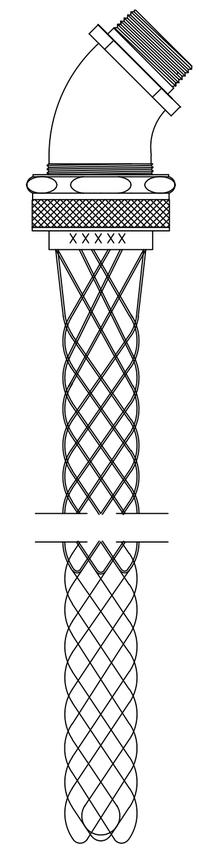

INSTRUCTIONS INCLUDED WITH GRIP

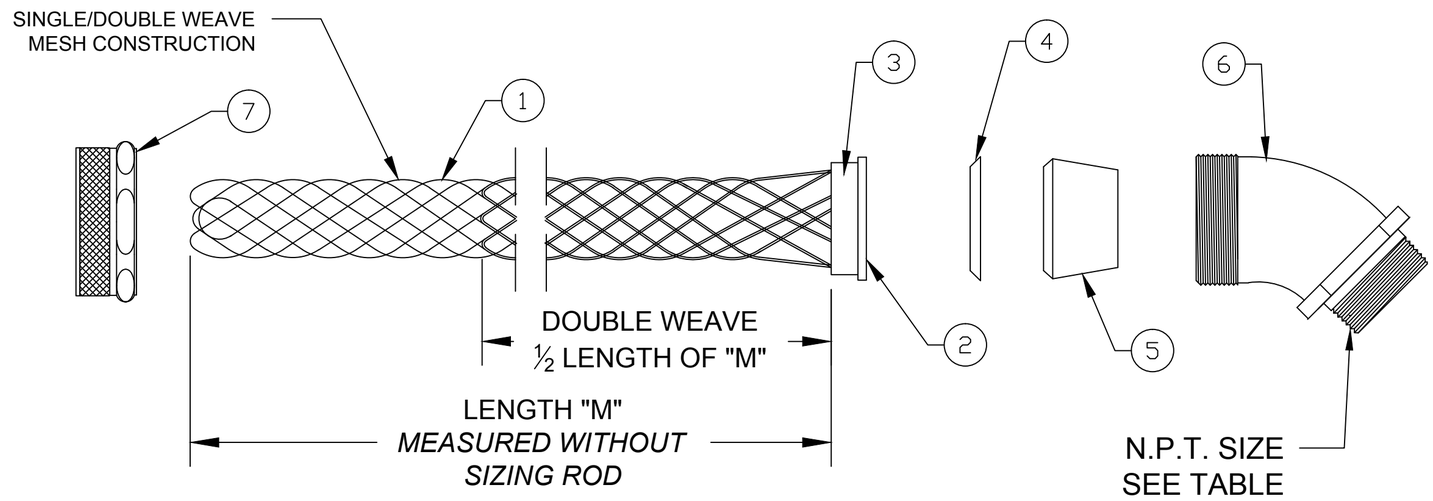

ITEM	DESCRIPTION	MATERIAL
1	WIRE MESH	STAINLESS STEEL
2	INNER RING	ALUMINUM
3	OUTER RING	ALUMINUM
4	FRICTION RING	ZINC PLATED STEEL
5	GROMMET	RUBBER
6	THREADED BODY	ALUMINUM
7	COMPRESSION NUT	ALUMINUM

36826 5.75" WAS 9.25"
EC NO: IPG2017-0557 12/1/16
DRWN: BPATTERS ----
CH'KD: ----
APPR: HKNEELAN 2016/05/04
DESCRIPTION
REV B

QUALITY SYMBOL
▼=0
C=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±.13	±.010
1 PLACE	±.25	±.020
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: INCH/MM
SCALE: NTS
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: HRUIZ01 DATE: 2014/10/17
CHECKED BY: HKNEELAN DATE: 2014/10/17
APPROVED BY: JFMURPHY DATE: 2016/05/04

TITLE: STRAIN RELIEF DELUXE 45 DEGREE MALE 1/2" TO 1" N.P.T.

molex MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-130097-110
SHEET NO.: 1 0F 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION