

HCMOS 3.2x2.5mm 1.8V SMD Oscillator



Model: F310 Series

RoHS Compliant / Pb Free

Rev. 7/25/2007

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm



FEATURES

- 1.8V Operation
- HCMOS Output
- Low Power Consumption
- Standby Function
- Tape and Reel (2,000 pcs. STD)

PRELIMINARY

• PART NUMBER SELECTION [Learn More - Internet Required](#)

Part Number	Model Number	Frequency Stability ¹	Operating Temperature (°C)	Frequency Range (MHz)
665-Frequency-xxxxx	F310	±100 PPM	-10 ~ +70	1.800 ~ 50.000
676-Frequency-xxxxx	F310R	±100 PPM	-40 ~ +85	1.800 ~ 50.000
667-Frequency-xxxxx	F315	±50 PPM	-10 ~ +70	1.800 ~ 50.000
758-Frequency-xxxxx	F315R	±50 PPM	-40 ~ +85	1.800 ~ 50.000
668-Frequency-xxxxx	F316	±25 PPM	-10 ~ +70	1.800 ~ 50.000
759-Frequency-xxxxx	F316R	±25 PPM	-40 ~ +85	1.800 ~ 50.000

• ELECTRICAL CHARACTERISTICS


PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	1.800 ~ 50.000 MHz
Temperature Range (T _{STG})	
Operating	-10°C ~ +70°C
Storage	-55°C ~ +125°C
Supply Voltage (V _{DD})	1.8V ± 5%
Input Current (I _{DD})	
1.800 ~ 32.100 MHz	7mA
32.100+ ~ 50.000 MHz	15mA
Output Symmetry (50% V _{DD})	40% ~ 60%
Rise Time(20% ~ 80% V _{DD}) (T _r)	
1.800 ~ 32.100 MHz	5nS
32.100+ ~ 50.000 MHz	3.5nS
Fall Time (80% ~ 20% V _{DD}) (T _f)	
1.800 ~ 32.100 MHz	5nS
32.100+ ~ 50.000 MHz	3.5nS
Output Voltage (V _{OL})	20% V _{DD}
(V _{OH})	80% V _{DD} Min
Output Current (I _{OL})	2mA Min
(I _{OH})	-2mA Min
Output Load (HCMOS)	15pF
Standby Current	10µA
Start-up Time (T _s)	10mS
Output Disable Time ²	300nS
Output Enable Time ²	10mS

¹ Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, aging, shock, and vibration.

² An internal pullup resistor from pin 1 to pin 4 allows active output if pin 1 is left open.

Note: A 0.01µF bypass capacitor should be placed between VDD (Pin 4) and GND (Pin 2) to minimize power supply line noise.

All specifications subject to change without notice.

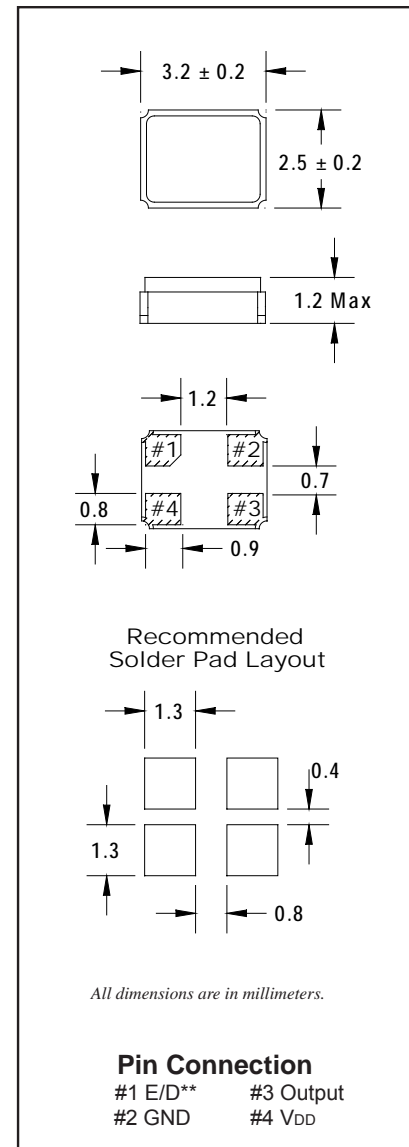

• ENABLE / DISABLE FUNCTION

INH (Pin 1)	OUTPUT (Pin 3)
OPEN ²	ACTIVE
'1' Level V _{IH} ≥ 70% V _{DD}	ACTIVE
'0' Level V _{IL} ≤ 30% V _{DD}	High Z

HCMOS 3.2x2.5mm 1.8V SMD Oscillator



Model: F310 Series

RoHS Compliant / Pb Free

Rev. 7/25/2007

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm

Need a
Sample®

• TAPE SPECIFICATIONS (millimeters)

MODEL	A	B	C	D	E	F	STD Reel QTY
F310 Series	∅1.5	4.0	4.0	3.5	8.0	1.3	2,000

• REEL SPECIFICATIONS (millimeters)

MODEL	G	H	I	J	K	L	M
F310 Series	2.0	∅13	∅21	∅60	∅180	9.0	1.2

