

Main Product Characteristics


V_{DS}	68V
$R_{DS(on)}$	6.8mohm(typ.)
I_D	84A ①



TO-220



Marking and Pin Assignment



Schematic Diagram

Features and Benefits

- Advanced trench MOSFET process technology
- Special designed for PWM, load switching and general purpose applications
- Ultra low on-resistance with low gate charge
- Fast switching and reverse body recovery
- 175°C operating temperature
- Lead free product



Description

It utilizes the latest trench processing techniques to achieve the high cell density and reduces the on-resistance with high repetitive avalanche rating. These features combine to make this design an extremely efficient and reliable device for use in power switching application and a wide variety of other applications.

Absolute Max Rating

Symbol	Parameter	Max.	Units
I_D @ TC = 25°C	Continuous Drain Current, V_{GS} @ 10V	84 ①	A
I_D @ TC = 100°C	Continuous Drain Current, V_{GS} @ 10V	75 ①	
I_{DM}	Pulsed Drain Current ②	336	
P_D @ TC = 25°C	Power Dissipation ③	181	W
	Linear Derating Factor	1.2	W/°C
V_{DS}	Drain-Source Voltage	68	V
V_{GS}	Gate-to-Source Voltage	± 20	V
E_{AS}	Single Pulse Avalanche Energy @ L=0.3mH	135	mJ
I_{AS}	Avalanche Current @ L=0.3mH	30	A
T_J T_{STG}	Operating Junction and Storage Temperature Range	-55 to + 175	°C

Thermal Resistance

Symbol	Characteristics	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-case ③	—	0.83	$^{\circ}\text{C/W}$
$R_{\theta JA}$	Junction-to-ambient ($t \leq 10\text{s}$) ④	—	62	$^{\circ}\text{C/W}$
	Junction-to-Ambient (PCB mounted, steady-state) ④	—	40	$^{\circ}\text{C/W}$

Electrical Characteristics @ $T_A=25^{\circ}\text{C}$ unless otherwise specified


Symbol	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)DSS}$	Drain-to-Source breakdown voltage	68	—	—	V	$V_{GS} = 0\text{V}, I_D = 250\mu\text{A}$
$R_{DS(on)}$	Static Drain-to-Source on-resistance	—	6.8	8	$\text{m}\Omega$	$V_{GS}=10\text{V}, I_D = 30\text{A}$
		—	12.7	—		$T_J = 125^{\circ}\text{C}$
$V_{GS(th)}$	Gate threshold voltage	2	—	4	V	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$
		—	2.5	—		$T_J = 125^{\circ}\text{C}$
I_{DSS}	Drain-to-Source leakage current	—	—	1	μA	$V_{DS} = 68\text{V}, V_{GS} = 0\text{V}$
		—	—	50		$T_J = 125^{\circ}\text{C}$
I_{GSS}	Gate-to-Source forward leakage	—	—	100	nA	$V_{GS} = 20\text{V}$
		-100	—	—		$V_{GS} = -20\text{V}$
Q_g	Total gate charge	—	93.8	—	nC	$I_D = 30\text{A},$ $V_{DS}=30\text{V},$ $V_{GS} = 10\text{V}$
Q_{gs}	Gate-to-Source charge	—	28.5	—		
Q_{gd}	Gate-to-Drain("Miller") charge	—	26.9	—		
$t_{d(on)}$	Turn-on delay time	—	20.4	—	ns	$V_{GS}=10\text{V}, V_{DS} = 60\text{V},$ $R_L=1.0\Omega,$ $R_{GEN}=2.55\Omega,$ $I_D = 60\text{A}$
t_r	Rise time	—	94.2	—		
$t_{d(off)}$	Turn-Off delay time	—	47.3	—		
t_f	Fall time	—	86.5	—		
C_{iss}	Input capacitance	—	6193	—	pF	$V_{GS} = 0\text{V},$ $V_{DS} = 25\text{V},$ $f = 1\text{MHz}$
C_{oss}	Output capacitance	—	308	—		
C_{rss}	Reverse transfer capacitance	—	253	—		

Source-Drain Ratings and Characteristics


Symbol	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	—	—	84 ①	A	MOSFET symbol showing the integral reverse p-n junction diode.
I_{SM}	Pulsed Source Current (Body Diode)	—	—	336	A	
V_{SD}	Diode Forward Voltage	—	0.82	1.3	V	$I_S=10\text{A}, V_{GS}=0\text{V}$
t_{rr}	Reverse Recovery Time	—	43.1	—	nS	$T_J = 25^{\circ}\text{C}, I_F = 68\text{A}, di/dt = 100\text{A}/\mu\text{s}$
Q_{rr}	Reverse Recovery Charge	—	86.5	—	nC	

Test Circuits and Waveforms


EAS test circuits:

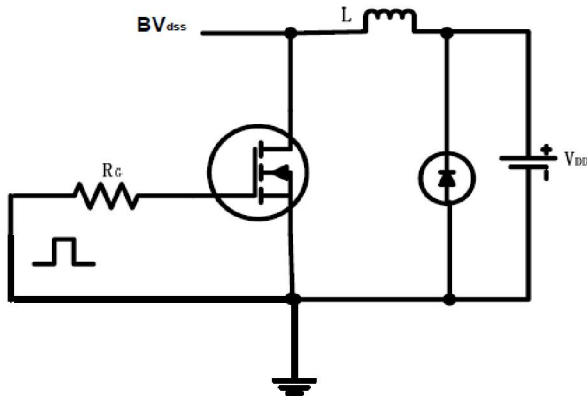


Gate charge test circuit:

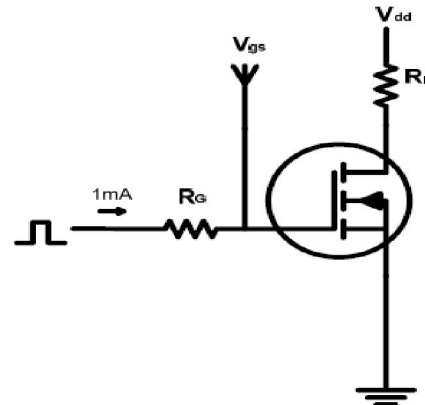

Switch Time Test Circuit:

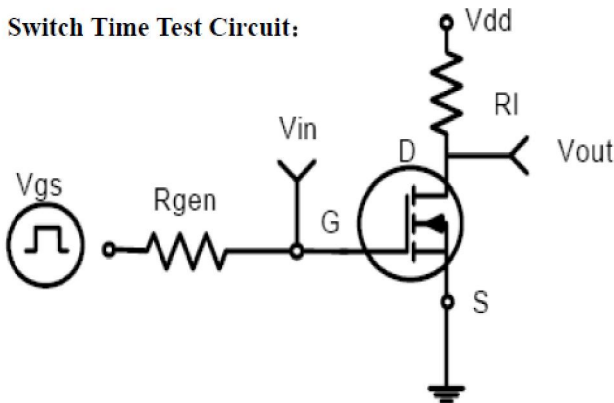

Waveforms:

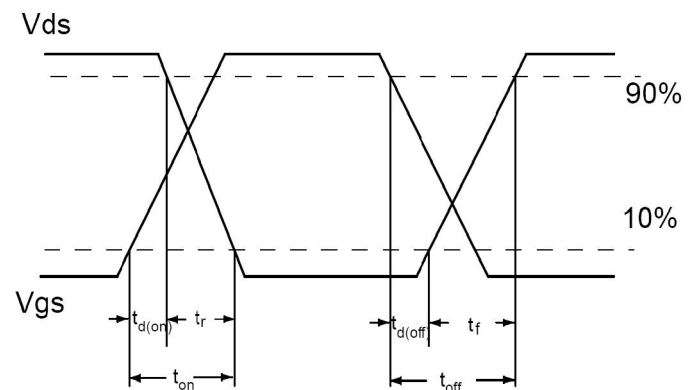

Notes:

Calculated continuous current based on maximum allowable junction temperature. Package limitation current is 75A.

- ② Repetitive rating; pulse width limited by max junction temperature.
- ③ The power dissipation PD is based on max junction temperature, using junction-to-case thermal resistance.
- ④ The value of $R_{\theta JA}$ is measured with the device mounted on 1 in 2 FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$
- ⑤ These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(MAX)} = 175^\circ\text{C}$.

Typical Electrical and Thermal Characteristics

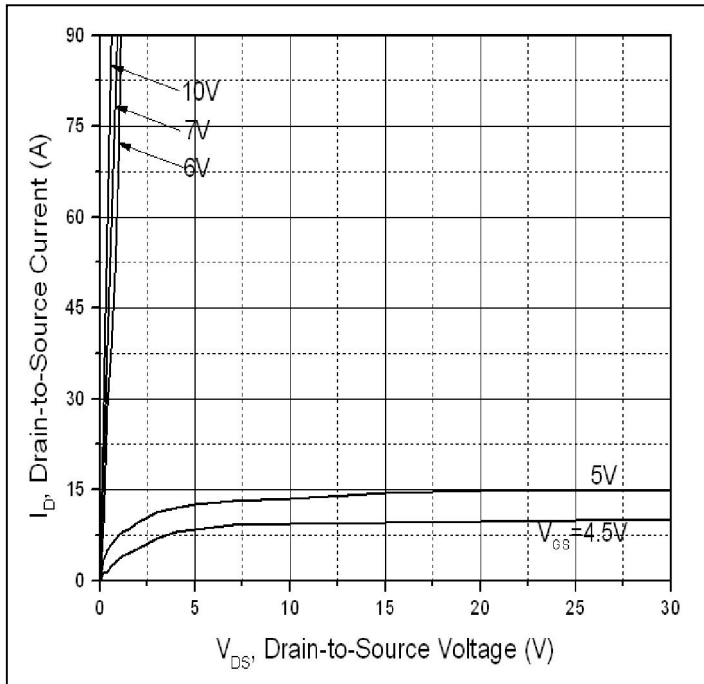


Figure 1: Typical Output Characteristics

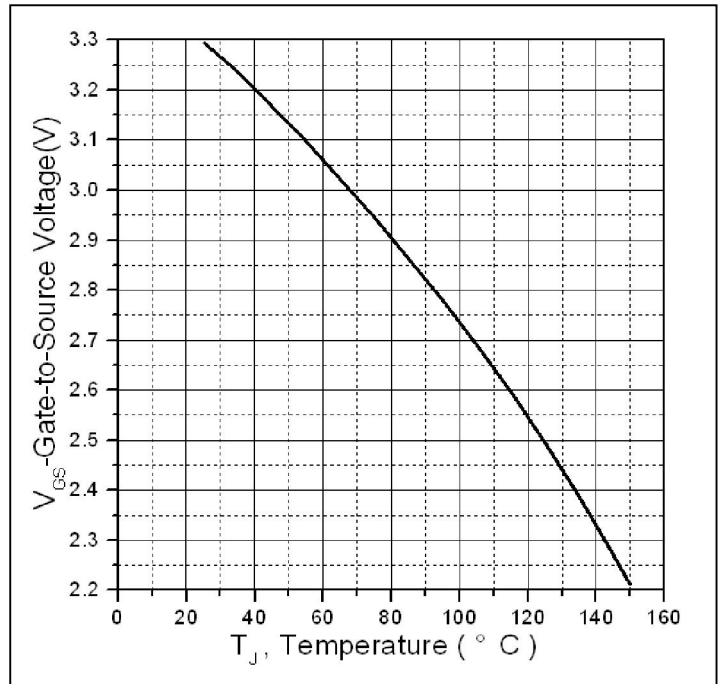


Figure 2: Gate to source cut-off voltage

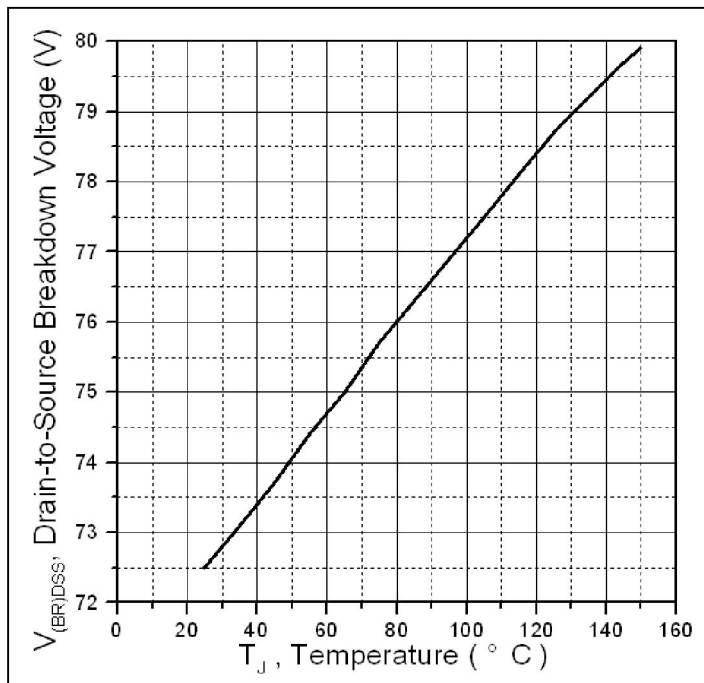


Figure 3: Drain-to-Source Breakdown Voltage vs. Temperature

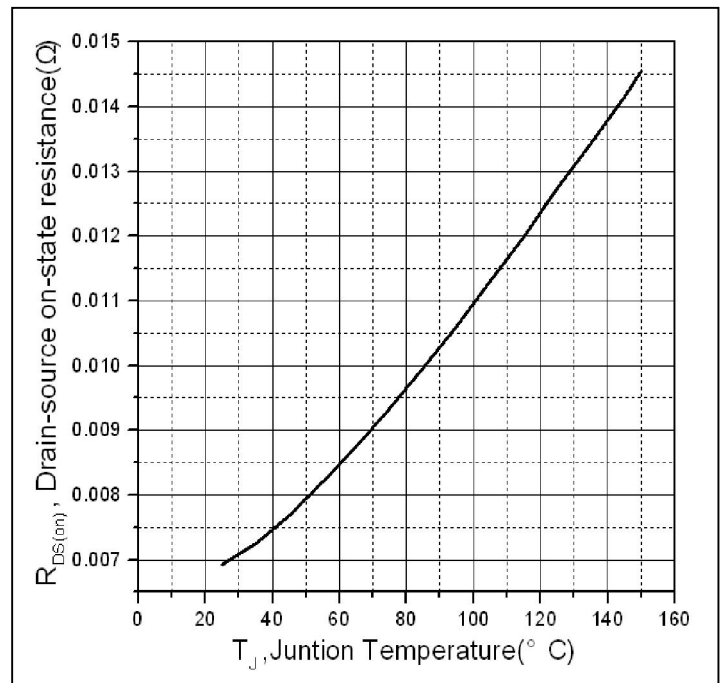


Figure 4: Normalized On-Resistance Vs. Case Temperature

Typical Electrical and Thermal Characteristics

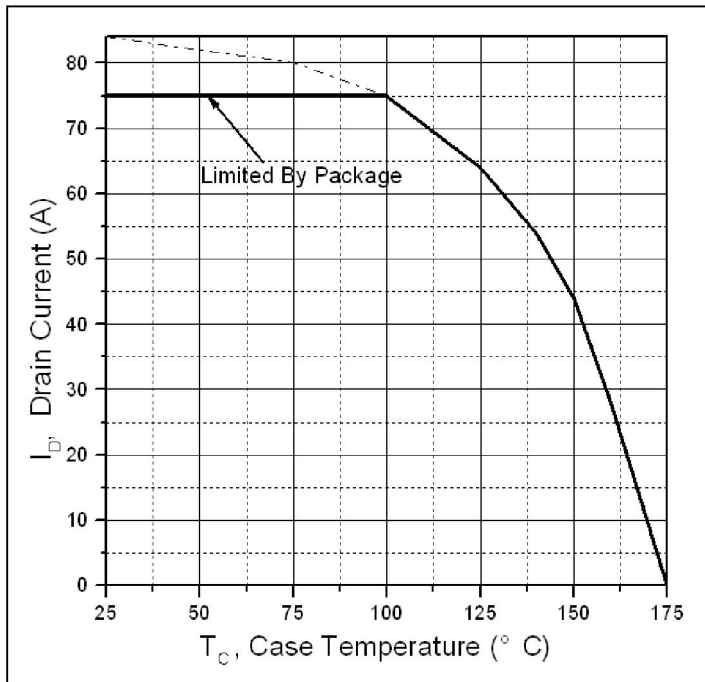


Figure 5. Maximum Drain Current Vs. Case Temperature

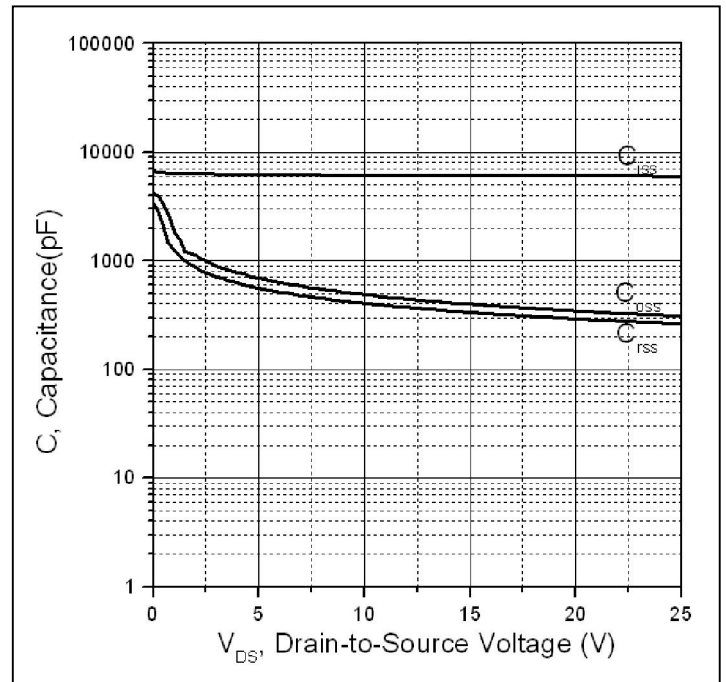


Figure 6. Typical Capacitance Vs. Drain-to-Source Voltage


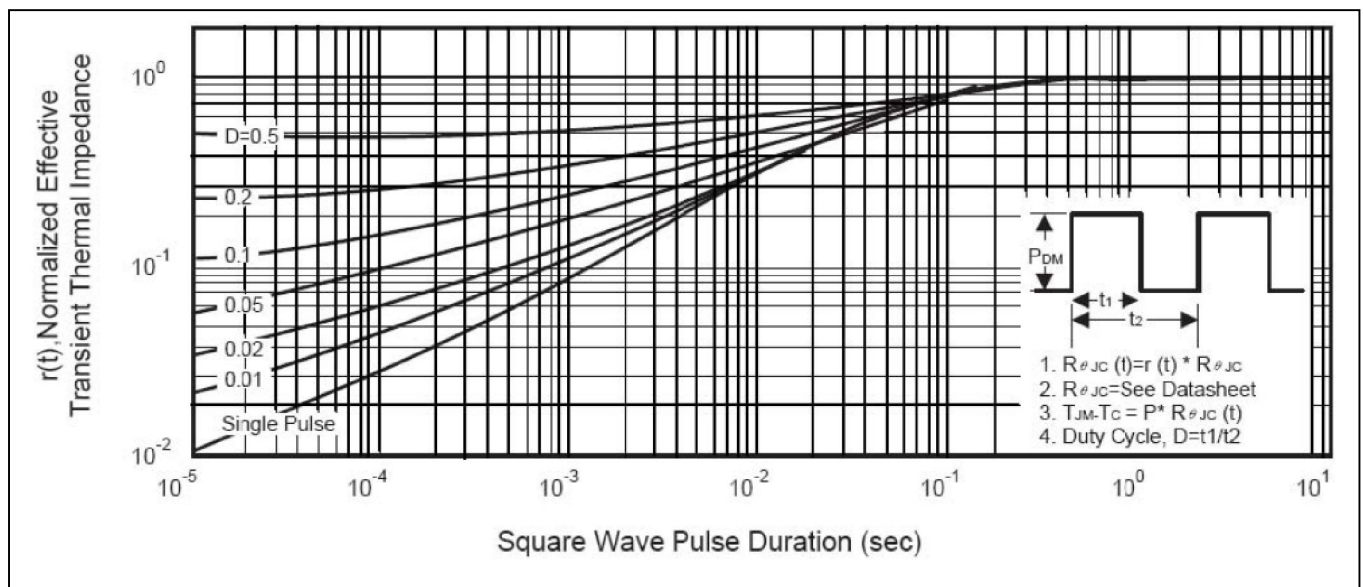


Figure 7. Maximum Effective Transient Thermal Impedance, Junction-to-Case

Mechanical Data

TO220 PACKAGE OUTLINE DIMENSION_GN

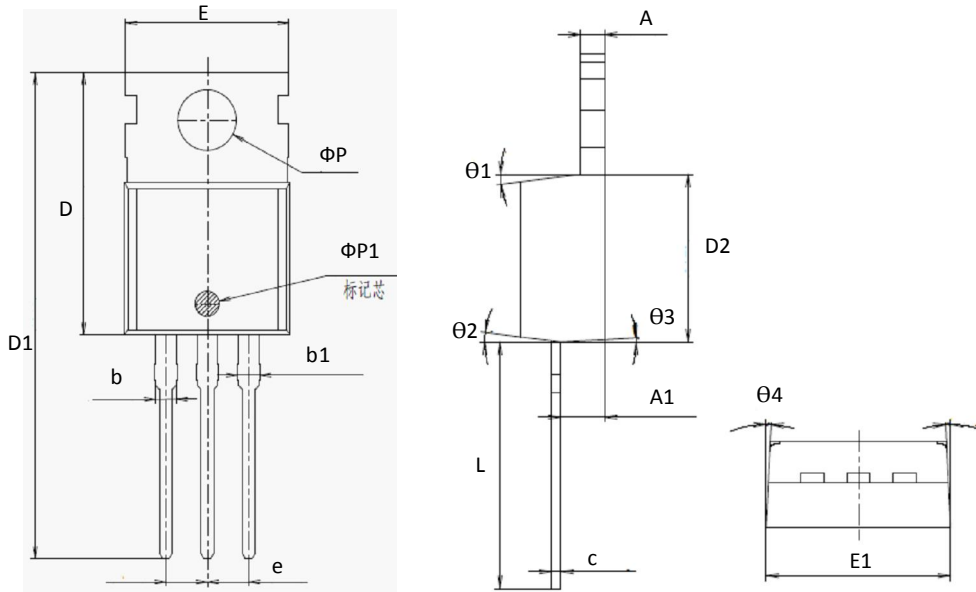

Symbol	Dimension In Millimeters			Dimension In Inches		
	Min	Nom	Max	Min	Nom	Max
A	-	1.300	-	-	0.051	-
A1	2.200	2.400	2.600	0.087	0.094	0.102
b	-	1.270	-	-	0.050	-
b1	1.270	1.370	1.470	0.050	0.054	0.058
c	-	0.500	-	-	0.020	-
D	-	15.600	-	-	0.614	-
D1	-	28.700	-	-	1.130	-
D2	-	9.150	-	-	0.360	-
E	9.900	10.000	10.100	0.390	0.394	0.398
E1	-	10.160	-	-	0.400	-
ΦP	-	3.600	-	-	0.142	-
ΦP1		1.500			0.059	
e	2.54BSC			0.1BSC		
L	12.900	13.100	13.300	0.508	0.516	0.524
□1	-	7°	-	-	7°	-
□2	-	7°	-	-	7°	-
□3	-	3°	-	5°	7°	9°
□4	-	3°	-	1°	3°	5°

Ordering and Marking Information

Device Marking: SSF6908

Package (Available)
TO220
Operating Temperature Range
C : -55 to 175 °C

Devices per Unit

Package Type	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Carton Box	Units/Carton Box
TO220	50	20	1000	6	6000

Reliability Test Program

Test Item	Conditions	Duration	Sample Size
High Temperature Reverse Bias(HTRB)	$T_J=125^{\circ}\text{C}$ to 175°C @ 80% of Max $V_{DSS}/V_{CES}/V_R$	168 hours 500 hours 1000 hours	3 lots x 77 devices
High Temperature Gate Bias(HTGB)	$T_J=150^{\circ}\text{C}$ or 175°C @ 100% of Max V_{GSS}	168 hours 500 hours 1000 hours	3 lots x 77 devices