
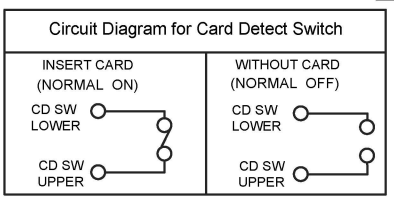
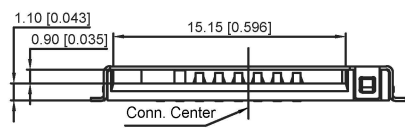


Specification

- * Electrical Characteristics :
 - Current Rating: 0.5A AC/DC Max.
 - Dielectric Withstanding Voltage: 250V AC/DC
 - Insulation Resistance: 500M ohms Min.
 - Contact Resistance: 100m ohms Max.
- *Mechanical Characteristics:
 - Mating Cycles: 5000 Insertions.
- * Environmental :
 - Operating Temperature:-40°C to +85°C.
- * Material:
 - 1.Housing:HI-Temp plastic UL 94V-0 Rated.
 - 2.Contact:Copper Alloy.
 - 3.Shell:Stainless Steel,t=0.20mm.
- * Plating :
 - Terminal:
 - Contact area: G/F Plated Over Nickel.
 - Solder area: Tin Plated Over Nickel.
 - Under plate: Nickel.
 - Shell:
 - Nickel Plated Over All,
 - Solder Area: Gold Flash.

PIN NO.	DESCRIPTION
P1#	C1:VCC
P2#	C5:GND
P3#	C2:RST
P4#	C6:VPP
P5#	C3:CLK
P6#	C7:I/O
P7#	CD SW LOWER
P8#	CD SW UPPER



ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING
③	Shell	1	SUS	
②	Terminal	8	COPPER ALLOY	
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK

广东星坤科技股份有限公司

生效日期

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES

DSND	DATE	SCALE: N/A	MODEL TYPE:
DWN	DATE	VIEW:	SIM CARD CONN
CHKD	DATE	UNIT: mm/in	PART NO.:
APPD	DATE	SIZE: A4	DWG NO.: XKSIM-010
XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT: 1.0g
			SHEET: 1/1
			REVISION: A0