
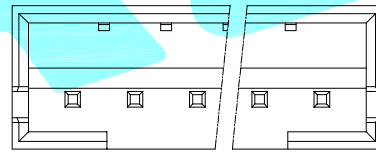


Poles	PART NO	DIM A	DIM B
2	PH-2A	2.0	6.1
3	PH-3A	4.0	8.1
4	PH-4A	6.0	10.1
5	PH-5A	8.0	12.1
6	PH-6A	10.0	14.1
7	PH-7A	12.0	16.1
8	PH-8A	14.0	18.1
9	PH-9A	16.0	20.1
10	PH-10A	18.0	22.1
11	PH-11A	20.0	24.1
12	PH-12A	22.0	26.1
13	PH-13A	24.0	28.1
14	PH-14A	26.0	30.1
15	PH-15A	28.0	32.1
16	PH-16A	30.0	34.1

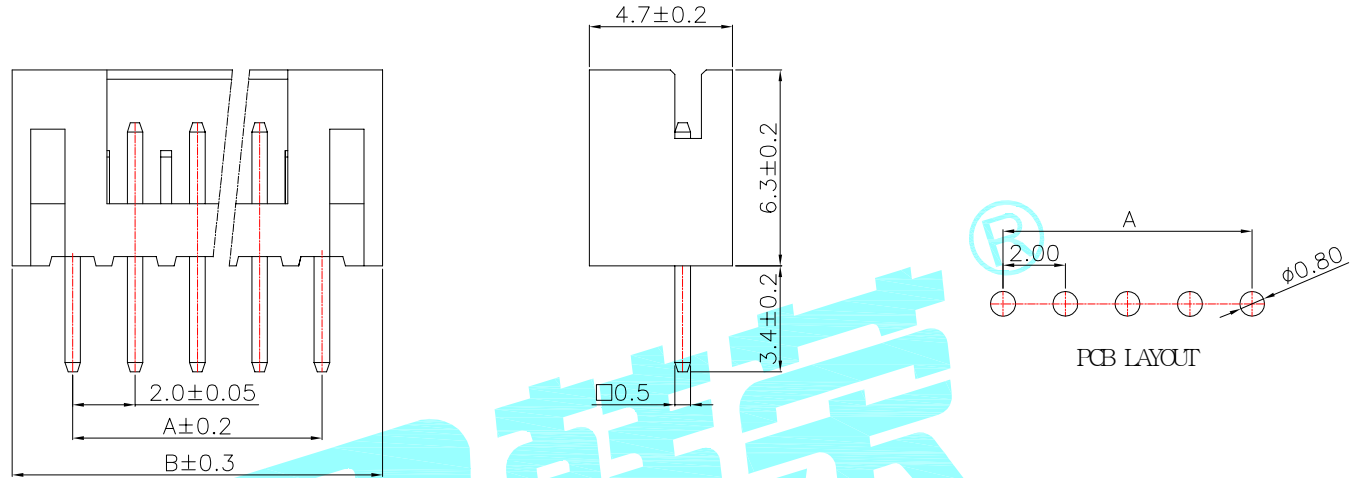

- 1.Pin pitch: 2.0
- 2.Rated voltage: 250V DC/AC
- 3.Contact resistance: $\leq 20m\Omega$
- 4.Insulation resistance: $\geq 1000M\Omega$
- 5.Operating temperature: $-25^{\circ}C \sim +85^{\circ}C$

②	PIN	—	—	Brass	Sn Plated	—
①	Base	—	1	PA66	Natural	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	 ELECTRONICS CO.,LTD		
DRAWN	LIUCAN	2021.10.22	TITLE: Bar Connector Series			
CHECKED			PART NO. PH-nA			
APPROVALS			UNIT: mm SCALE: 1:1 PROJ:			
TOLERANCES ARE		30~以上 10~30 5~10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE ±2'	DRAWING NO.	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			