

# NF3000C-SVA Series (RoHS Compliant)

3-phase 3-line 500VAC

The smallest footprint in the class



50A

UL1283/CSA C22.2 No8(C-UL) (file No.E102708)  
EN60939-2 (file No.R50147282)



## Applications

Machining Center, General-purpose Inverter, AC Servo

## Specifications

Parts No.	Rated Current	Weight	
NF3010C-SVA	10A	0.6Kg	fig1
NF3020C-SVA	20A	0.7Kg	
NF3030C-SVA	30A	0.7Kg	
NF3040C-SVA	40A	1.1Kg	fig2
NF3050C-SVA	50A	1.1Kg	
NF3060C-SVA	60A	1.1Kg	fig3
NF3080C-SVA	80A	2.6Kg	
NF3100C-SVA	100A	2.7Kg	fig4
NF3150C-SVA	150A	4.3Kg	
NF3180C-SVA	180A	4.3Kg	fig5
NF3200C-SVA	200A	6.9Kg	
NF3250C-SVA	250A	8.1Kg	
NF3300C-SVA	300A	8.1Kg	
Rated Voltage	530VAC max		
Leakage Current	10-180A: 2.5mA/200-300A: 10mA max 400VAC 50Hz		
Ambient temp.	-20 up to 50 Deg.C		

fig.1 (10-30A)

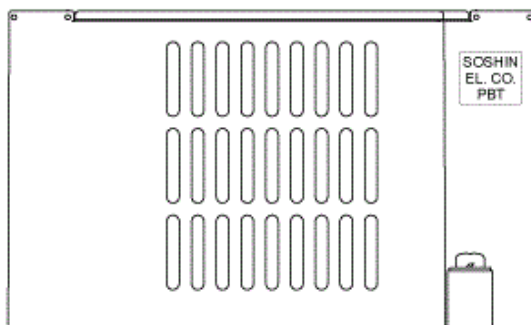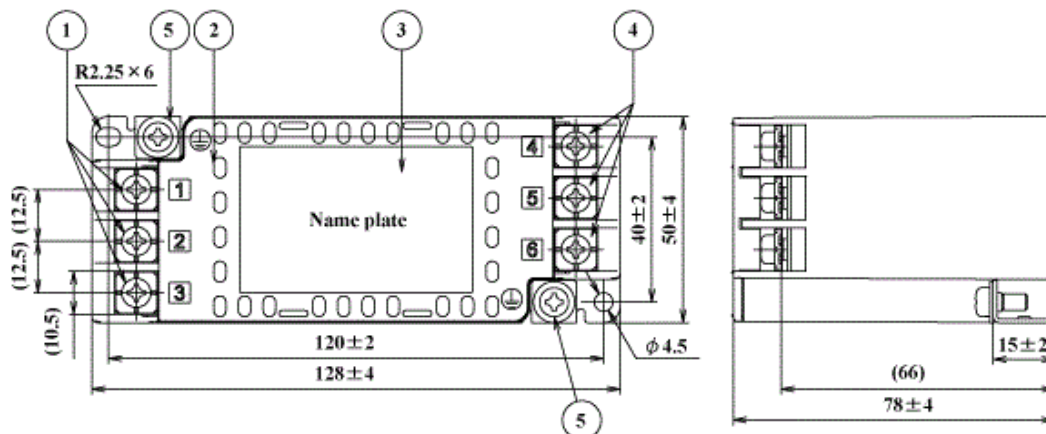

No	Part name	Note
1	Input terminal	M4
2	Case	PBT
3	Name plate	
4	Output terminal	M4
5	Earth terminal	M4

fig.2 (40-60A)

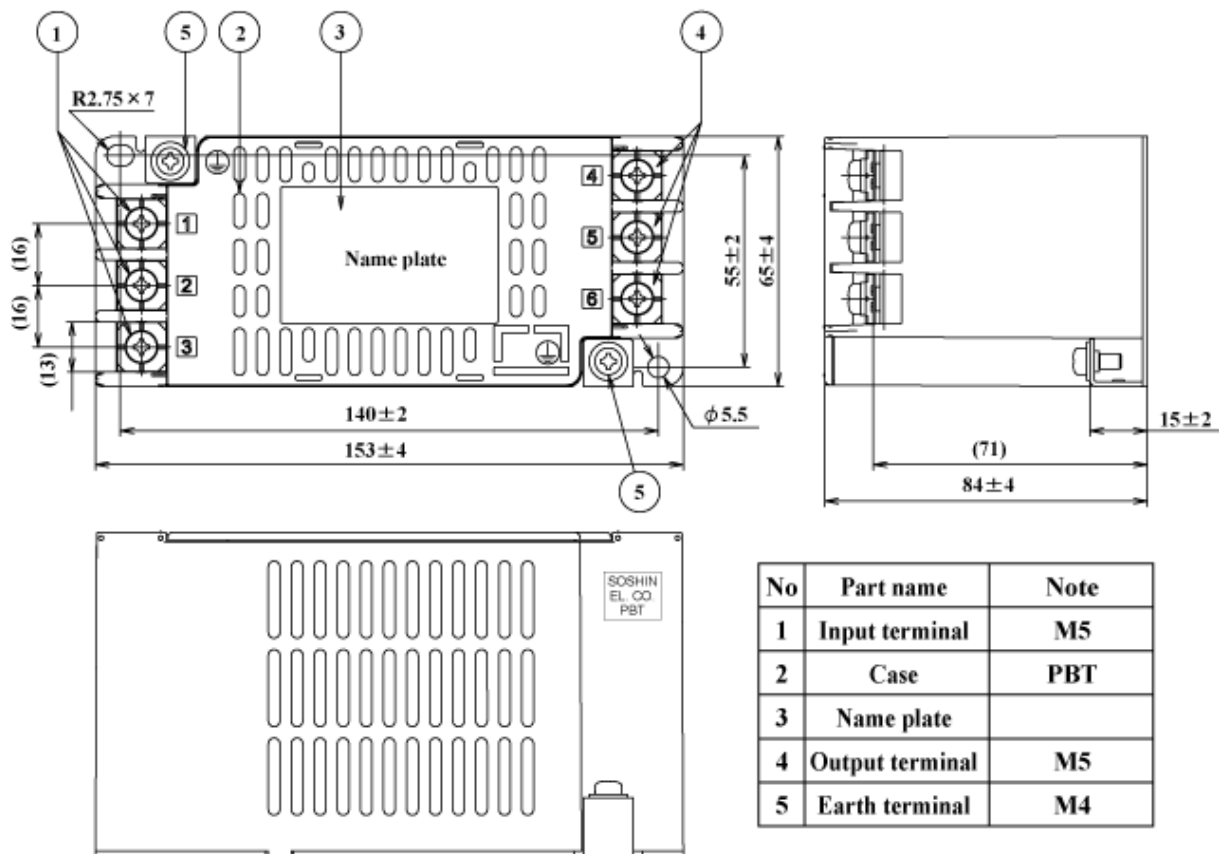


fig.3 (80A, 100A)

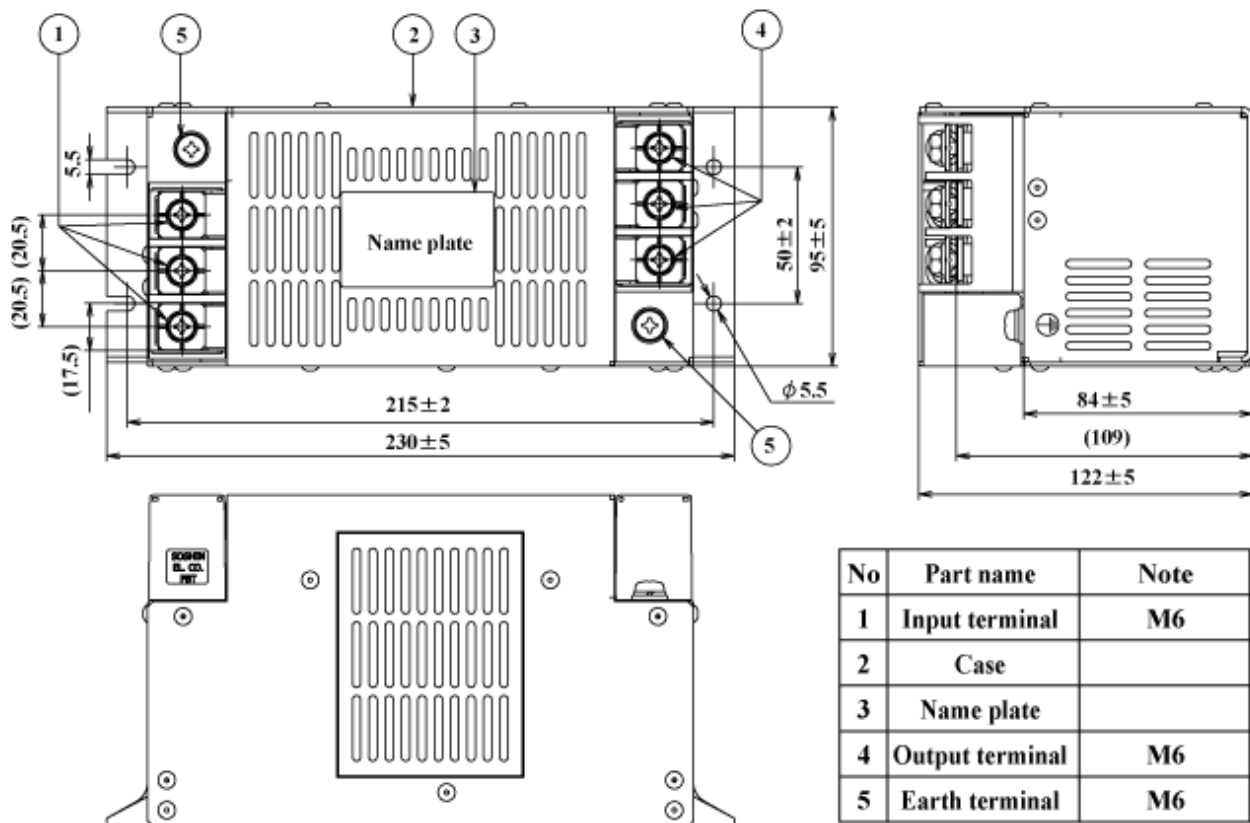


fig.4 (150A, 180A)



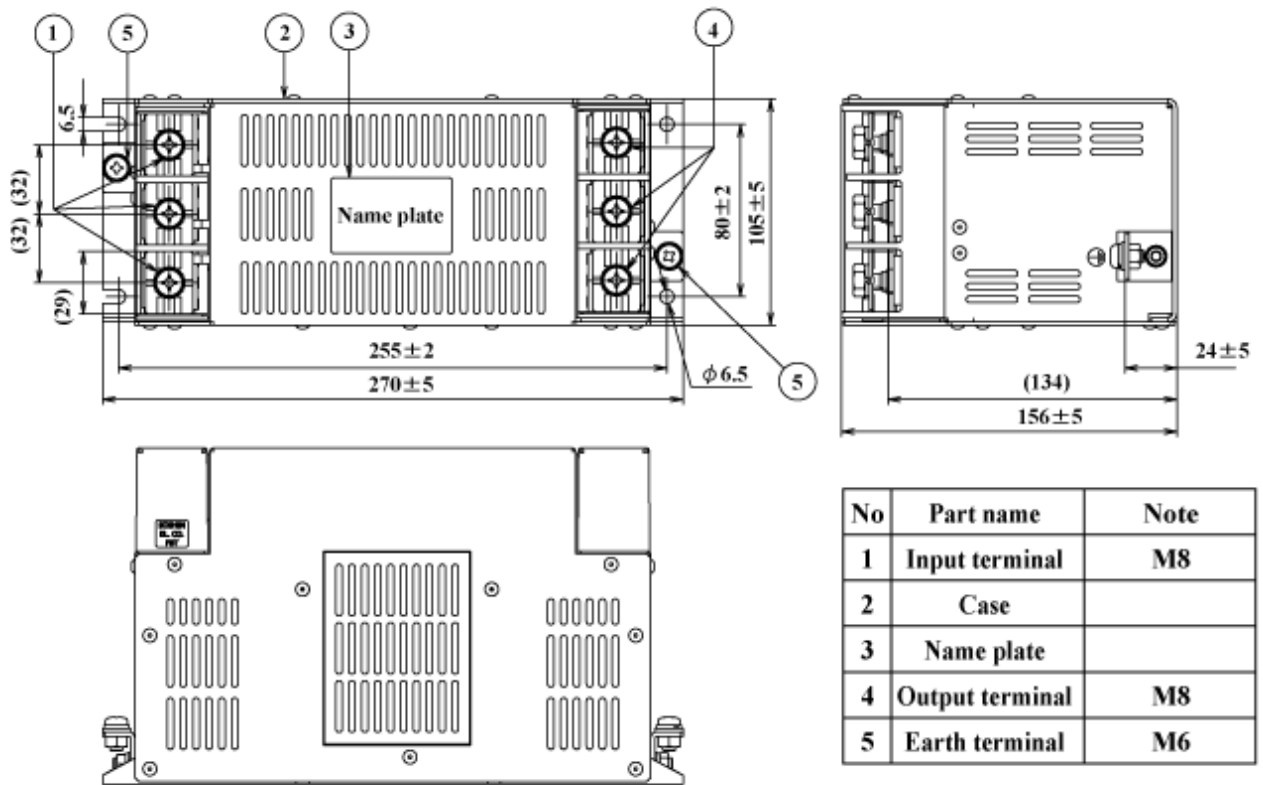


fig.5 (200-300A)

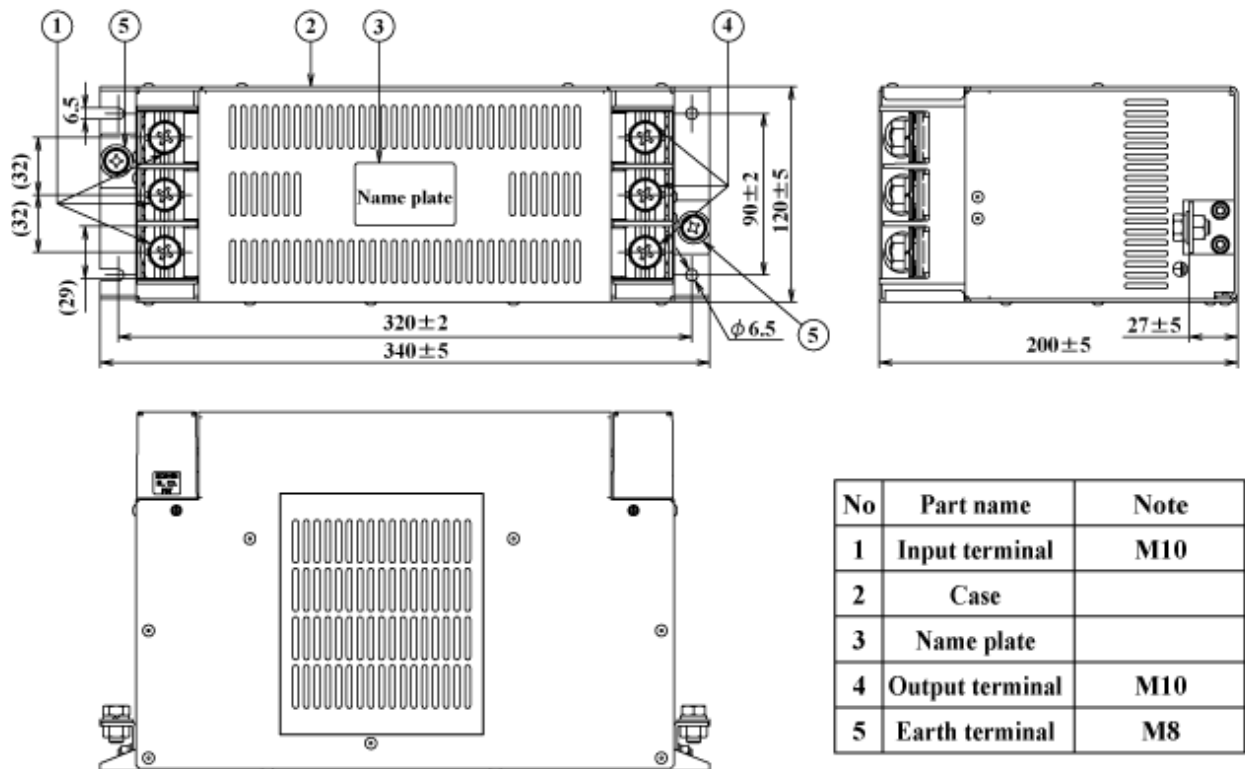

## Characteristics (Typical) (NF3050C-SVA)

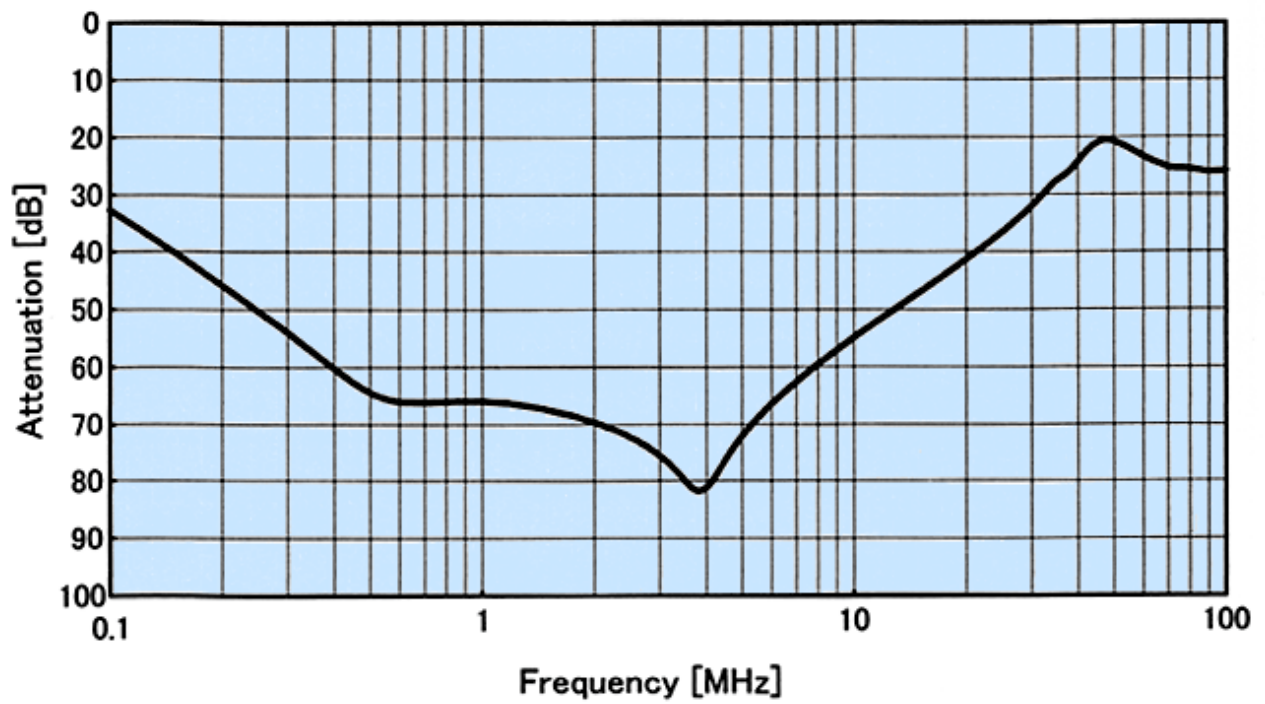

## Circuit Diagram

