
J2W SERIES

MODULAR JACK CONNECTORS: 4 PORT RJ45 WITH LEDS, VERTICAL PCB MOUNT, NON-SHIELDED, 3.2mm FOOTPRINT

Features:

- **Top performance for high speed networking, voice and data applications**
- **Meet FCC PART 68, Subpart F requirements**
- **Applications: Telecommunications, Broadcast, Data Products**
- **RoHS Compliant**

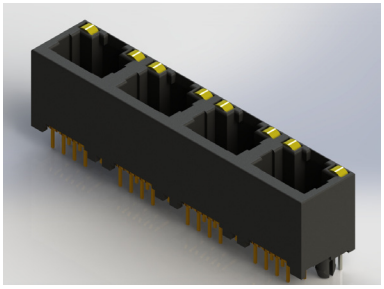

Specifications:


Insulator Material	PBT or Nylon
Contact Material	Phosphor Bronze
Contact Plating	Gold Plating on contact area and Tin Plating on tails with Nickel underplating all over
Current Rating	1.5 amps @25°C
Voltage Rating	125 V AC
Contact Resistance	20 milliohms maximum
Dielectric Withstanding Voltage	1000 V AC
Insulation Resistance	500 megaohms minimum
Durability	750 cycles minimum
Operating Temperature	-40°C to +85°C
Wave Soldering Process	260°C ± 5°C, 5~10 Seconds

Ordering Code:

EXAMPLE PART NUMBER: J2W048821P00031

SERIES:
RJ MODULAR JACK

HOUSING TYPE:
2W-



NO. OF PORTS:
04 - 4 PORT

NO. OF CONTACTS PER PORT:
88 - 8P8C

CONTACT PLATING:
2 - GOLD FLASH
3 - 15 MICROINCHES OF GOLD
6 - 30 MICROINCHES OF GOLD
9 - 50 MICROINCHES OF GOLD

CONTACT TAIL TYPE:
1 - VERTICAL PCB

HOUSING MATERIAL:
P - PBT
N - NYLON

MOUNTING OPTIONS:
1 - BOARD LOCKS

PORT TYPE:
3 - SINGLE ROW (VERTICAL)

SHIELDING:
0 - NO SHIELD

RIGHT LED COLOR:
0 - NO LED
1 - YELLOW
2 - RED
3 - GREEN
4 - ORANGE
5 - BI-COLOR (GREEN/YELLOW)
6 - BI-COLOR (RED/GREEN)
7 - BI-COLOR (GREEN/ORANGE)
8 - BI-COLOR (RED/YELLOW)

LEFT LED COLOR:
0 - NO LED
1 - YELLOW
2 - RED
3 - GREEN
4 - ORANGE
5 - BI-COLOR (GREEN/YELLOW)
6 - BI-COLOR (RED/GREEN)
7 - BI-COLOR (GREEN/ORANGE)
8 - BI-COLOR (RED/YELLOW)