


TOP VIEW



SIDE VIEW

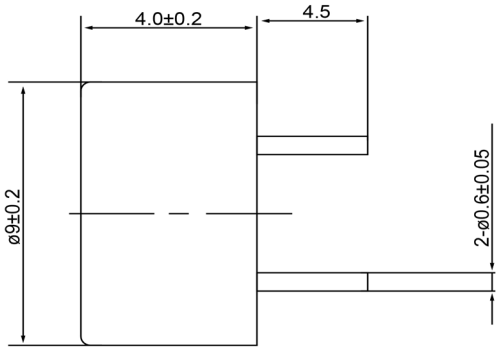

BOTTOM VIEW

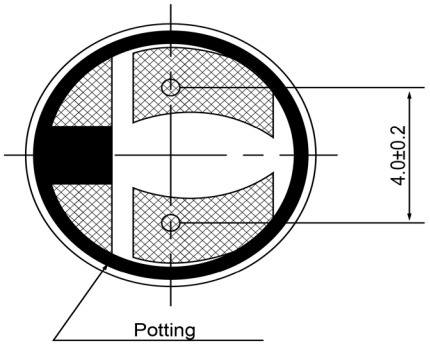

Specifications		
Description	**Value**	**Unit**
Technology	Electro-Mechanical	
Resonant Frequency	2,731	(Hz)
Rated Voltage	1.5	(V)
SPL @ 10cm	80	(dBA)
Coil Resistance	5.5	(ohm)
Mount Type	Thru Hole	
Voltage Range	1 ~ 3	(V)
Max Rated Current	80	(mA)
Housing Material	PBT	
Operating Temperature	-30 ~ +70	°C
Storage Temperature	-40 ~ +85	°C
Weight	1	(g)

Notes

1) All dimensions are in mm unless otherwise noted
2) All parts meet RoHS

DB UNLIMITED

Revision History

Version	Description	Date	Approved
1	Released from Engineering	10/21/2013	J.S

Drawn by	Date	Checked by	Date	Approved by	Date
A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013

Electro-Mechanical Transducer

TE092701-4

sales@dbunlimitedco.com | www.dbunlimitedco.com
©2013, DB Unlimited