



- IEEE 802.3af/at PoE (802.3af/at PoE) 24 24 24 24
- 100 24 24 24 PoE 24 24
- Multiple PoE repeaters can be deployed by daisy chain to extend range
- IEEE 802.3af/at PoE 24 24 24 24 24 24 24 24

System Specifications

System Specifications

Standards & Protocols:

- IEEE 802.3 10Base-T, Ethernet
- IEEE 802.3u 100Base-TX, Fast Ethernet
- IEEE 802.3x Ethernet Flow Control
- IEEE 802.3af Power over Ethernet (PoE)
- IEEE 802.3at Power over Ethernet Plus (PoE+)

Connectors and Cabling:

- 1 x 10/100Base-TX RJ-45 PoE Input Port
- 1 x 10/100Base-TX RJ-45 PoE Output Port
- 1 x 10/100Base-TX RJ-45 LAN Output Port

Power:

- PoE Power Input: 44-57 Volt
- Power Consumption: 2.5W (Max.)

Features

PoE:

- IEEE 802.3af/at compliant

Environment

Temperature (°C):

- Operating: 0°C ~ 50°C
- Storage: 0°C ~ 70°C

Humidity (Non-condensing):

- Storage: 5% to 95%
- Operating: 5 ~ 95%

Physical Specifications

Dimensions (W x D x H mm):

- 195 x 160 x 95mm

Weight (g):

- 700 g

Enclosure:

- Weatherproof IP65-rated housing



Others

Approval and Compliance:

- FCC Part 15, CE

Deployment:

- Wall/Pole mount

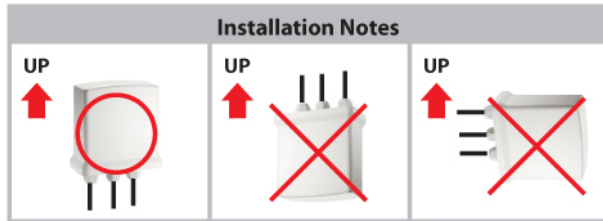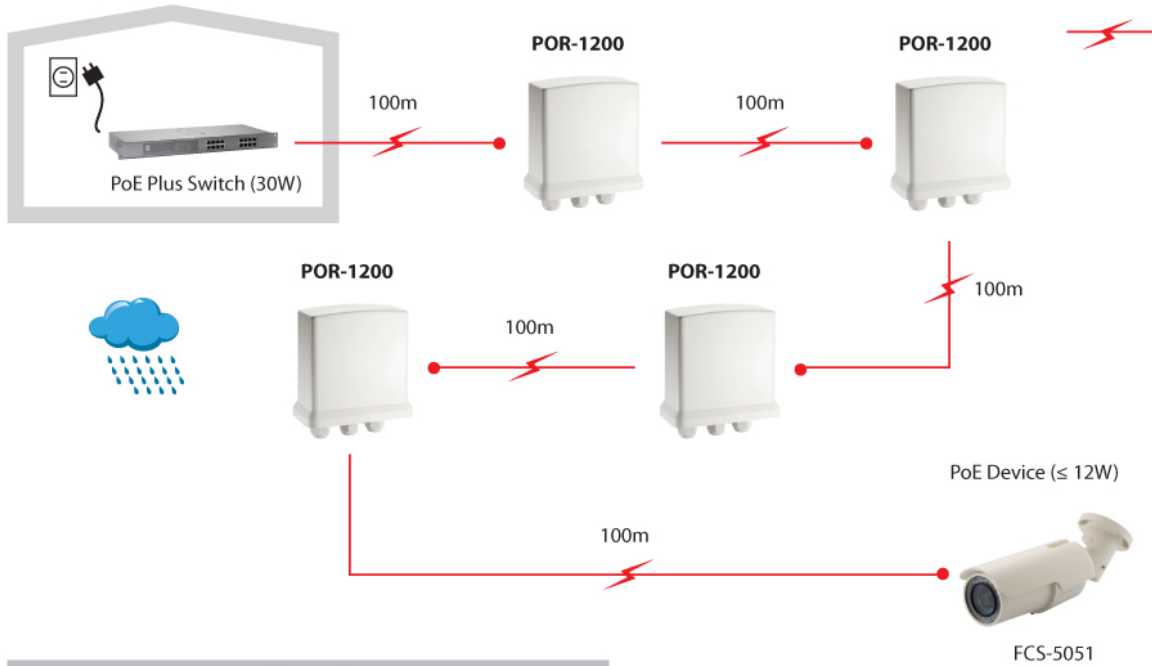

Order Information

POR-1200

Package Contents

POR-1200

Mounting Kit

Quick Installation Guide

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.