

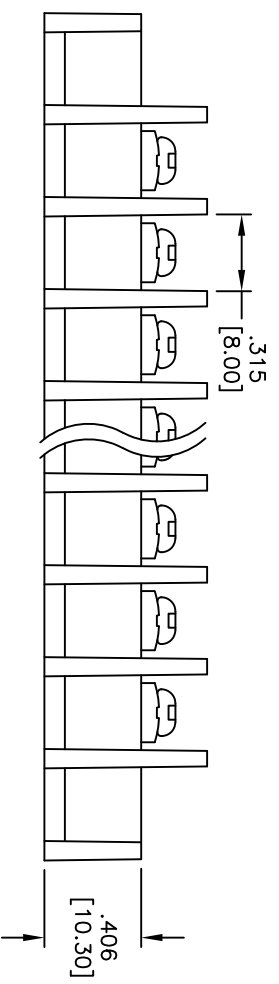


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/07/10	

APPROVED: _____
 DATE: _____ TITLE: _____

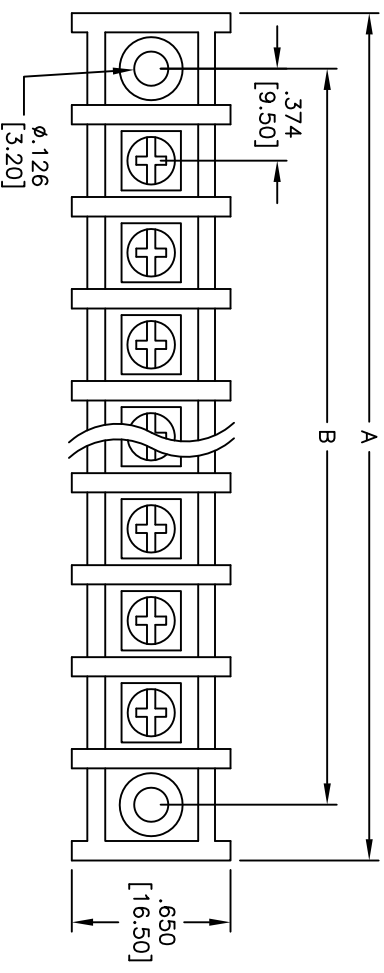

Positions: 2 thru 32
 $A = .374 [9.50] \times \text{No. of Poles} + .827 [21.00]$
 $B = .374 [9.50] \times \text{No. of (Poles + 1)}$

SPECIFICATIONS:

- Material: Insulator: Nylon 66, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass, Tin Plated
- Screws: M3.5, Nickel Plated Steel
- Electrical: Operating voltage: 300 VAC max. Current rating: 15 Amps max. Insulation resistance: 500 Mohms min. @ DC500V Dielectric withstanding voltage: 2,000 VAC for 1 minute
- Mechanical: Wire Range Awg: 12 - 22 STR Screw Torque Value: 12Kg-cm Temperature Rating: Operating temperature: -40°C to +105°C Environmental: Lead free, RoHS compliant Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES. [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DRY
CHECKED	6/07/10
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .374 [9.50] CENTERLINE BARRIER BLOCK, VERTICAL, MOUNT ENDS

SIZE	PART NO.	REV.
X	TBF-XX-00-M	-
REF:	S00031T	SCALE: NTS
SHEET 1 OF 1		