



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

RECOMMENDED PCB LAYOUT  
TOLERANCE ±0.05

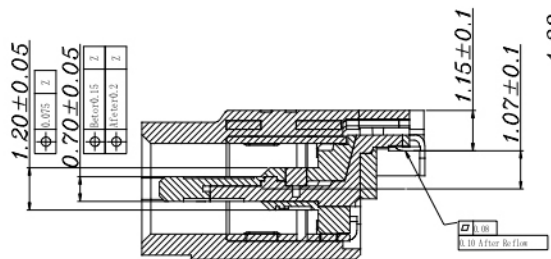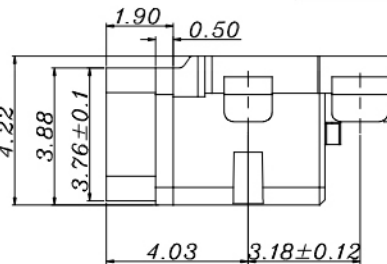

剖面图A-A



	G-Switch Electronic Technology CO., Ltd.		
	DESIGN 陈锋枫	DATE 2016.05.29	TITLE:
Unless otherwise specified, Tolerance:		DATE	GT-USB-7015
X. ±0.30		DATE	
X.x ±0.20	APPROVED	DATE	
X.xx ±0.15	<a href="http://www.dg-switch.com">http://www.dg-switch.com</a>		REV.: X1 SCALE: 4:1 UNIT: mm
X.xxx ±0.10	TEL:0769-82388879		SIZE: A4 SHEET: 1/1
Angles ±3°			