



SMA Female to N Male Cable 150 cm Length  
Using PE-P141 Coax, RoHS

TECHNICAL DATA SHEET

PE356-150CM

**Configuration**

Connector 1	SMA Female
Connector 2	N Male
Cable Type	PE-P141

**Electrical Specifications**

Frequency Range	DC to 18 GHz
Impedance	50 Ohms
Maximum VSWR	1.4:1
Velocity of Propagation	70 %
RF Shielding	110 dB
Dielectric Withstanding Voltage (AC)	500 Vrms

**Typical Performance by Frequency**

**Frequency 1**

Frequency	1000 MHz
VSWR	1.4:1
Return Loss	15.56 dB
Insertion Loss	0.13 dB/ft [0.43 dB/m]

**Frequency 2**

Frequency	2 GHz
VSWR	1.4:1
Return Loss	15.563 dB
Insertion Loss	0.185 dB/ft [0.61 dB/m]

**Frequency 3**

Frequency	4.5 GHz
VSWR	1.4:1
Return Loss	15.563 dB
Insertion Loss	0.27 dB/ft [0.89 dB/m]

**Frequency 4**

Frequency	9 GHz
VSWR	1.4:1
Return Loss	15.563 dB
Insertion Loss	0.425 dB/ft [1.39 dB/m]

**Frequency 5**

Frequency	18 GHz
VSWR	1.4:1
Return Loss	15.563 dB
Insertion Loss	0.64 dB/ft [2.1 dB/m]

Electrical Specification Notes:

Short lengths up to 12" long may exhibit VSWR measurements up to 9% higher.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to N Male Cable 150 cm Length Using PE-P141 Coax, RoHS PE356-150CM](#)





SMA Female to N Male Cable 150 cm Length  
Using PE-P141 Coax, RoHS

TECHNICAL DATA SHEET

PE356-150CM

**Mechanical Specifications**

**Temperature**

Temperature Operating Range -55 to +125 deg C

**Size**

Length 59.06 in [150.01 cm]

Cable Color Blue

**Cable**

Cable Type PE-P141  
Inner Conductor Type Solid  
Cable Inner Conductor Copper Clad Steel, Silver  
No of Shields 2  
Dielectric Type PTFE  
Jacket Material FEP  
Jacket Diameter 0.163 in [4.14 mm]

**Connector 1**

Type SMA Female  
Configuration Straight  
Body Material and Plating Passivated Stainless Steel

**Connector 2**

Type N Male  
Configuration Straight  
Coupling Nut Material and Plating Passivated Stainless Steel  
Body Material and Plating Passivated Stainless Steel

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant Yes

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to N Male Cable 150 cm Length Using PE-P141 Coax, RoHS PE356-150CM](#)



SMA Female to N Male Cable 150 cm Length  
Using PE-P141 Coax, RoHS

TECHNICAL DATA SHEET

PE356-150CM

**Plotted and Other Data**

Notes:

- Values at +25 °C, sea level

SMA Female to N Male Cable 150 cm Length Using PE-P141 Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to N Male Cable 150 cm Length Using PE-P141 Coax, RoHS PE356-150CM](#)

URL: <http://www.pasternack.com/sma-female-n-male-pe-p141-cable-assembly-pe356-150cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE356-150CM CAD Drawing

SMA Female to N Male Cable 150 cm Length Using PE-P141 Coax, RoHS

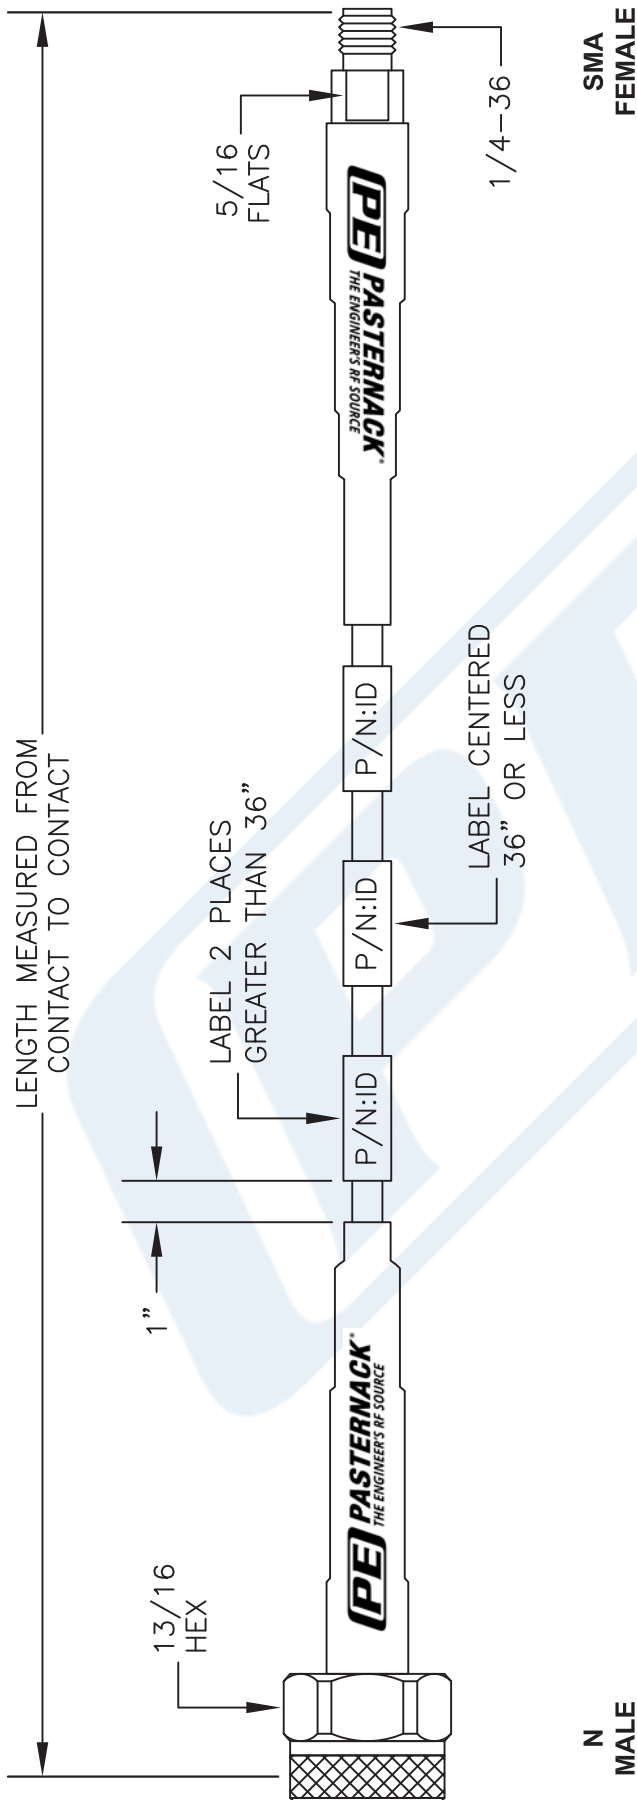

N  
MALE

SMA  
FEMALE

Part Number Configuration		How To Order	
PE3zzzz	YY - XX UU	Part # Ext.	Length In Inches
LF = RoHS Compliant	CM = Centimeters < Blank > = Inches Length	-12	12"
< Blank > = Standard		-24	24"
		-36	36"
		-48	48"
		-60	60"
		-XX	Custom Length
		Part # Ext.	Length In Centimeters
		-25CM	25Cm
		-50CM	50Cm
		-75CM	75Cm
		-100CM	100Cm
		-125CM	125Cm
		-XXCM	Custom Length

**PE PASTERNAK**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE  
**PE356**  
FSCM NO. 53919  
CAD FILE 111114  
SCALE N/A  
SIZE A  
2233

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.