

May, 2017

3M™ Aluminum Foil Tape 431


Product Description

3M™ Aluminum Foil Tape 431 is a 2-mil nominal dead soft aluminum foil with transparent acrylic adhesive for many permanent sealing, holding, splicing or masking applications requiring the protection offered by a foil backing.

IMPORTANT: 3M™ Aluminum Foil Tape 431 is not intended for medical usage. Neither 3M nor the Food and Drug Administration have evaluated or reviewed this tape for medical application. User assumes all risk and liability whatsoever in connection with usage of product in a medical application.

Product Features

- Flame resistant. Meets U.L. 723, Class “L” low flammability rating (File R 7311).
- Meets requirements of FAR 25.853(a).
- Foil backing provides an excellent reflective surface for both heat and light.
- Good aging performance both indoors and outdoors.
- Low moisture vapor transmission rate offers excellent sealing and patching performance.
- Best results attained when applied to clean dry surface above 32°F (0°C).

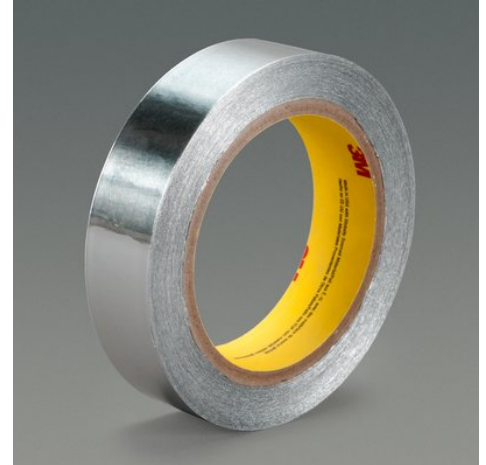

3M™ Aluminum Foil Tape 431

Technical Information Note

The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

Typical Physical Properties

Property	Values		Method
Color	Shiny Silver		
Total Tape Thickness	0.08 mm	3.1 mil	ASTM D3652
Backing Thickness	0.05 mm	1.9 mil	ASTM D3652
Backing	Aluminum Foil		
Adhesive	Acrylic		
Approximate Weight	0.0049 g/m/24 mm	0.0096 lb/yd/in	
Water Vapor Transmission	0.77 g/m ² /24 hr	0.05 g/100 in ² /24 hr	ASTM D3833

Typical Performance Characteristics

Property	Values		Method	Dwell/Cure Time	Substrate	Notes
180° Peel Adhesion	4.5 N/cm	41 oz/in	ASTM D3330	Initial	Stainless Steel	12 in/min (300 mm/min)
Tensile Strength	33.3 N/cm	19 lb/in	ASTM D3759			
Elongation at Break	5 %		ASTM D3759			
Temperature Use Range	-54 to 149 °C	-65 to 300 °F				

Available Sizes

Property	Values	
Standard Roll Length	55 m	60 yd

Handling/Application Information

Application Ideas

- Seal and patch tears in truck trailers, as well as other outdoor equipment.
- Reflect heat away from sensitive areas.
- Thermal heat conduction.
- General purpose holding, patching, sealing applications – indoors or out.
- Splicing of thin gauge foils.
- Good maskant in electroplating of aluminum because it will not contaminate the bath.
- Decorative.

3M™ Aluminum Foil Tape 431

Storage and Shelf Life

Store under normal conditions of 60° to 80°F (16° to 27°C) and 40 to 60% R.H. in the original carton.
To obtain best performance, use this product within 24 months from date of manufacture.

Industry Specifications

UL 723, Class “L” low flammability rating (File R 7311)
FAR 25.853(a)

References

Property	Values
3m.com Product Page	https://www.3m.com/3M/en_US/company-us/all-3m-products/-/3M-Aluminum-Foil-Tape-431?N=5002385+3293241743&rt=rud
Safety Data Sheet (SDS)	https://www.3m.com/3M/en_US/company-us/SDS-search/results/?gsaAction=msdsSRA&msdsLocale=en_US&co=ptn&q=431

Family Group

	431	439
Color	Shiny Silver	Shiny Silver
Total Tape Thickness (mm)	0.08	0.08
Backing Thickness (mm)	0.05	0.05
Backing	Aluminum Foil	Aluminum Foil
Adhesive	Acrylic	Acrylic
Tensile Strength (N/cm)	33.3	31.5

ISO Statement

This Industrial Adhesives and Tapes Division product was manufactured under a 3M quality system registered to ISO 9001 standards.

Information

Technical Information: The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.

Product Selection and Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

Warranty, Limited Remedy, and Disclaimer: Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

