
HER151 THRU HER158

HIGH EFFICIENCY RECTIFIERS

Reverse Voltage - 50 to 1000 Volts Forward Current - 1.5 Amperes

DO-15

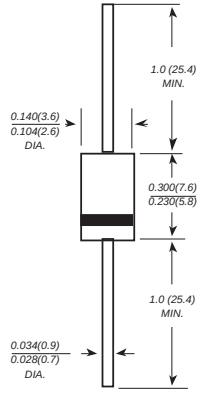

Dimensions in inches and (millimeters)

FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- High speed switching for high efficiency
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
  250℃/10 seconds,0.375”(9.5mm) lead length,
  5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC DO-15 molded plastic body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight:0.014 ounce, 0.40 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25℃ ambient temperature unless otherwise specified.
Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

	SYMBOLS	HER 151	HER 152	HER 153	HER 154	HER 155	HER 156	HER 157	HER 158	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	300	400	600	800	1000	VOLTS
Maximum RMS voltage	V_{RMS}	35	70	140	210	280	420	560	700	VOLTS
Maximum DC blocking voltage	V_{DC}	50	100	200	300	400	600	800	1000	VOLTS
Maximum average forward rectified current 0.375”(9.5mm) lead length at T_A=50℃	$I_{(AV)}$	1.5								Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50.0								Amps
Maximum instantaneous forward voltage at 1.5A	V_F	1.0			1.3		1.70			Volts
Maximum DC reverse current T_A=25℃ at rated DC blocking voltage T_A=100℃	I_R	5.0 100.0								uA
Maximum reverse recovery time (NOTE 1)	t_{rr}	50					70			ns
Typical junction capacitance (NOTE 2)	C_J	30.0					20.0			pF
Typical thermal resistance (NOTE 3)	R_{qJA}	50.0								℃/W
Operating junction and storage temperature range	T_J,T_{STG}	-65 to +150								℃

Note:1.Reverse recovery condition I_F=0.5A,I_R=1.0A,Irr=0.25A
2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.
3.Thermal resistance from junction to ambient at 0.375”(9.5mm)lead length,P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES HER151 THRU HER158

FIG. 1- FORWARD CURRENT DERATING CURVE

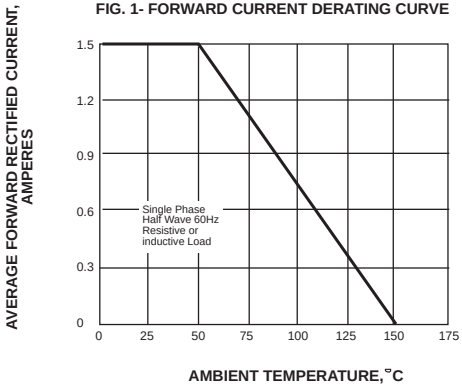


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

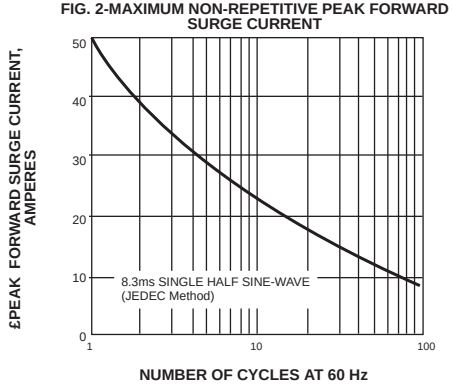


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

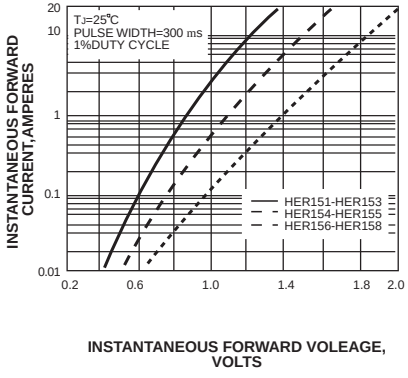


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

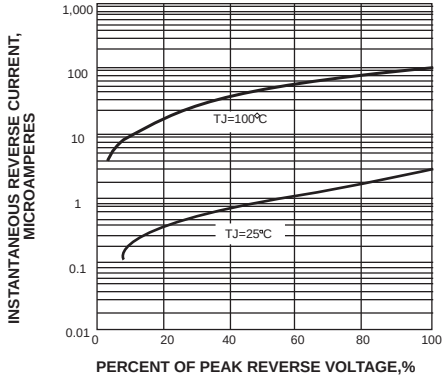


FIG. 5-TYPICAL JUNCTION CAPACITANCE

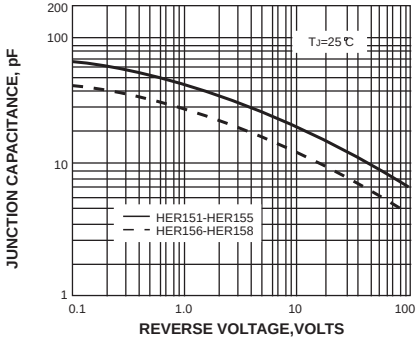


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

