DATASHEET

Dual Element Detectors LHi 954 / 958

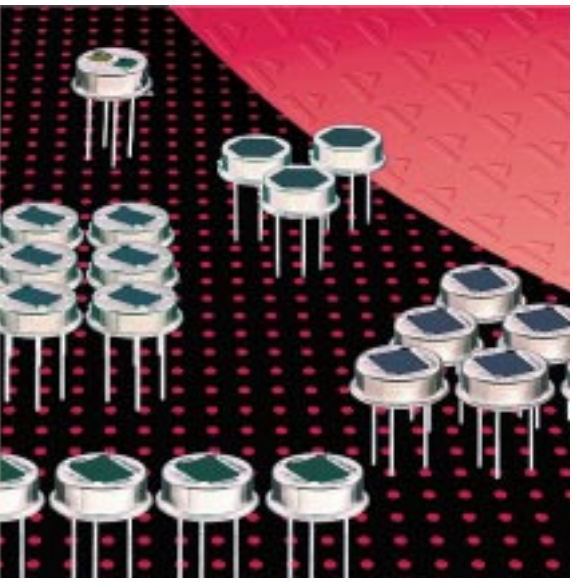

TO-39 /TO-5 housing

High reliability

Well proven design

The **LHi 954** and **LHi 958** pyroelectric infrared-detectors have been a world standard for more than 10 years. They both are dual element types with FET in source follower connection. The **LHi 954** detector is available in **TO-39** housing with standard infrared filter whereas the **LHi 958** is the same detector in a **TO-5** housing with standard infrared filter.
It offers a highly stable responsivity with excellent common mode performance (match) and low noise .

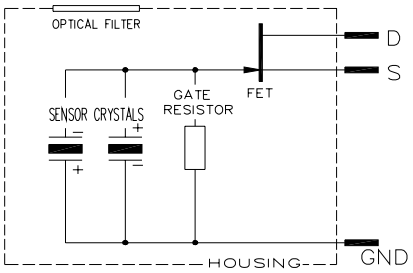

Parameters	LHi 954 / 958				
	min	typical	max	units	condition
Element size		2x1		mm^2	(2 elements)
Responsivity	3000	3700		V/W	100°C, 1 Hz
Match		1	10	%	
Noise		20	50	µVpp	25°C, 0,3...10Hz
Offset Voltage	0,2		1,50	V	R_S =47kΩ, 25°C
NEP		$8{,}1 \times 10^{-10}$	25×10^{-10}	W √Hz	1Hz Bw, 100°C, 1 Hz
D*	$5{,}6 \times 10^{7}$	$17{,}5 \times 10^{7}$		cm √Hz/W	1Hz Bw, 100°C, 1 Hz
Output Impedance		5	10	kΩ	R_S =47kΩ, 25°C.
Operating Voltage	2		15	V	R_S =47kΩ, 25°C
Field of View, horizontal		110°			unobstructed
vertical		110°			unobstructed
Operating Temp.	-40		85	°C	non permanent
Storage Temperature	-40		85	°C	non permanent



Field of View

Right for modification reserved / WS /, 29.6.2001

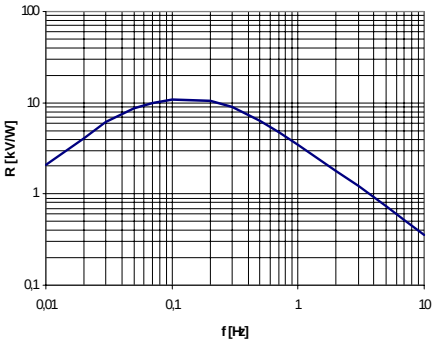

Frequency Response

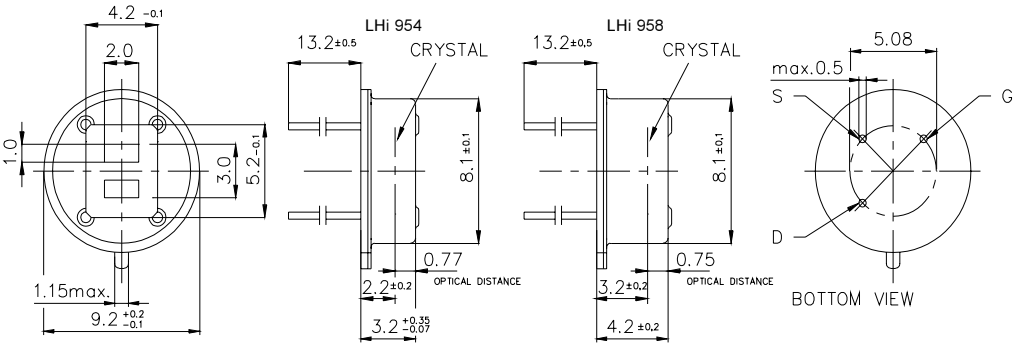

Dimensions in mm

Europe:
PerkinElmer Optoelectronics GmbH
Wenzel Jaksch Str 31
Wiesbaden / Germany
Phone +49(0)611 492 0
Fax +49(0)611 492 170

USA:
PerkinElmer Optoelectronics
2175 Mission Colledge Blvd
Santa Clara, CA 95054
Phone +408 565 0830
Fax +408 565 0703

Asia:
PerkinElmer Optoelectronics
47, Ayer Rajah Crescent #06-12
Singapore 139947
Phone +65 775 2022
Fax +65 775 1008

PerkinElmer® optoelectronics.