

High Frequency Ceramic Solutions

900 MHz Wide Band Low Pass Filter


P/N 0900LP15B0063

Detail Specification: 3/16/2018

Page 1 of 3

General Specifications

Frequency (MHz)	863 - 960	Recommended Storage Conditions (unmounted/unused product on T&R)	+5 ~ +35 °C, Humidity 45~75%RH
Insertion Loss (dB)	0.7 Typ. (0.9 max)		
2Fo Attenuation (1726-1856MHz)	50 Typ. (46 Min.)		
3Fo Attenuation (2589-2784MHz)	59 Typ. (50 Min.)		
Power Capacity	3W max. (CW)		
Operating Temperature	-40 to +85°C		
Storage Temperature	-40 to +85°C		




Part Number Explanation

P/N Suffix	Packing Style	Bulk	Suffix = S	0900LP15B0063S
		T & R	Suffix = E	0900LP15B0063E (Reel Size: 4000pcs)
	Termination style	100% Tin	Suffix = None	0900LP15B0063(E/S)
	50Ω SMA Connector Eval Board			0900LP15B0063-EB1SMA (orderable p/n)


Mechanical Dimensions

	In	mm
L	0.079 ± 0.004	2.00 ± 0.10
W	0.049 ± 0.004	1.25 ± 0.10
T	0.037 ± 0.004	0.95 ± 0.10
a	0.012 ± 0.004	0.30 ± 0.10
b	0.008 ± 0.004/-0.006	0.20 ± 0.1/-0.15
c	0.012 ± 0.004	0.30 ± 0.10
g	0.014 ± 0.004	0.35 ± 0.10
p	0.026 ± 0.002	0.65 ± 0.05




Terminal Configuration

No.	Function
1	GND
2	NC
3	GND
4	I/O
5	GND
6	NC
7	GND
8	I/O



Mounting Considerations

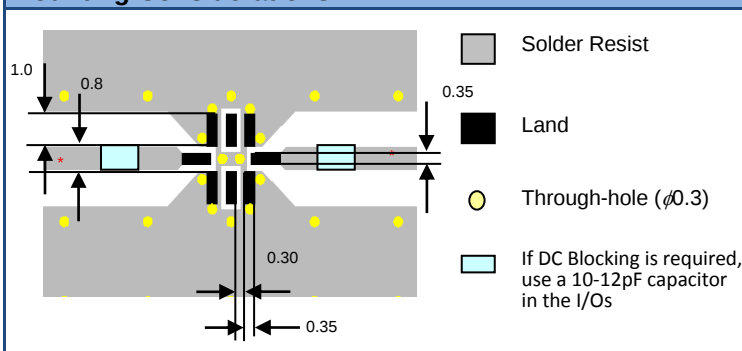

*Trace must be designed to a 50Ω characteristic impedance based on PCB material and thickness.

Want the layout file or need us to revise your layout to make sure is correct? Send us a message at:

www.johansontechnology.com/ask-a-question

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 1.3

2018 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


900 MHz Wide Band Low Pass Filter

Detail Specification: 3/16/2018

P/N 0900LP15B0063

Page 2 of 3

Measuring Diagram

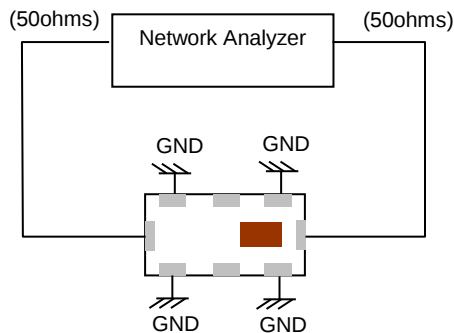

Click here Order the SMA-ready Evaluation Board p/n 900LP15B0063-EB1SMA:


www.johansontechnology.com/request-a-

Want the layout file of this? Send us a message at:

www.johansontechnology.com/ask-a-question

Let us help with your filter (or Johanson antenna) layout for best performance and send us a message by clicking on the link above

Typical Electrical Performance (T=25°C)

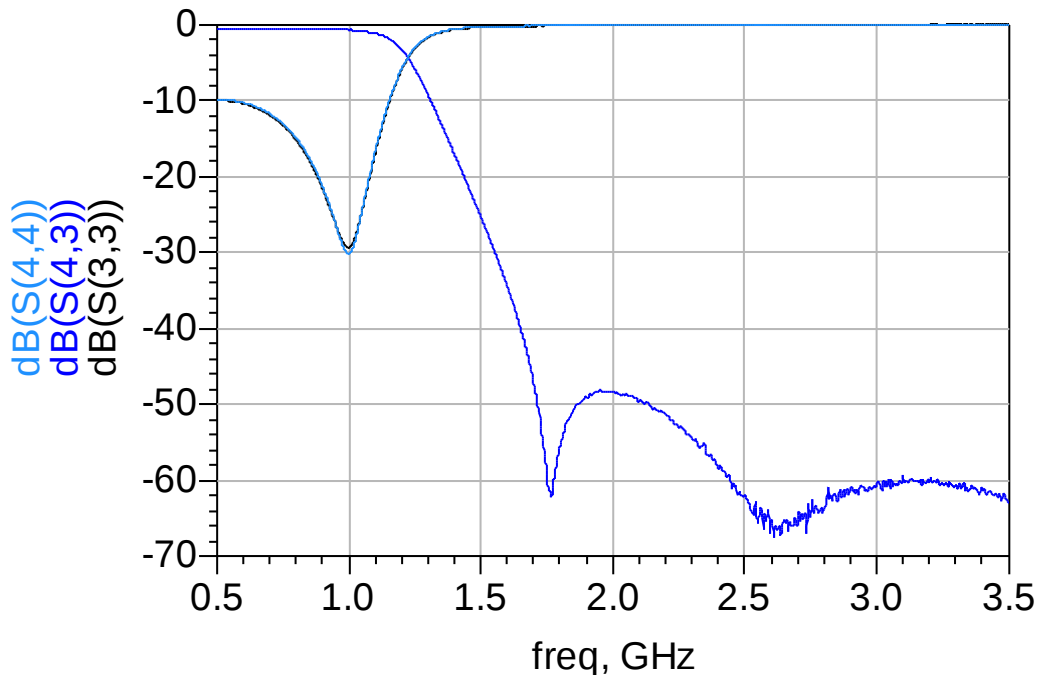

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions

900 MHz Wide Band Low Pass Filter

P/N 0900LP15B0063

Detail Specification: 3/16/2018

Page 3 of 3

Packaging information

www.johansontechnology.com/tape-reel-packaging

Soldering Information

www.johansontechnology.com/typical-soldering-profile

RoHS Compliance

www.johansontechnology.com/rohs-compliance

MSL Info

www.johansontechnology.com/msl-rating

To Download Measured S-parameters for Evaluation and Simulation:

www.johansontechnology.com/low-pass-filters

For layout review contact our Applications Team at:

www.johansontechnology.com/ask-a-question

Mini SMD Chip Antennas at:

www.johansontechnology.com/antennas

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver. 1.3 2018 Johanson Technology, Inc. All Rights Reserved