Preliminary Data

SIPMOS® Power Transistor


SPD 07N20


Features

- N channel
- Enhancement mode
- Avalanche rated
- d*v*/d*t* rated

Product Summary

Drain source voltage	V_{DS}	200	V
Drain-Source on-state resistance	$R_{DS(on)}$	0.4	Ω
Continuous drain current	I_D	7	A





Type	Package	Ordering Code	Packaging
SPD07N20	P-TO252	Q67040-S4120-A2	Tape and Reel
SPU07N20	P-TO251	Q67040-S4112-A2	Tube

Pin 1	Pin 2	Pin 3
G	D	S

Maximum Ratings, at T_j = 25 ˚C, unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous drain current T_C = 25 ˚C T_C = 100 ˚C	I_D	 7 4.5	A
Pulsed drain current T_C = 25 ˚C	I_{Dpulse}	28	
Avalanche energy, single pulse I_D = 7 A, V_{DD} = 50 V, R_{GS} = 25 Ω	E_{AS}	120	mJ
Avalanche energy, periodic limited by T_{jmax}	E_{AR}	4	
Reverse diode d*v*/d*t* I_S = 7 A, V_{DS} = 160 V, d*i*/d*t* = 200 A/µs, T_{jmax} = 175 ˚C	d*v*/d*t*	6	kV/µs
Gate source voltage	V_{GS}	±20	V
Power dissipation T_C = 25 ˚C	P_{tot}	40	W
Operating and storage temperature	T_j , T_{stg}	-55... +175	˚C
IEC climatic category; DIN IEC 68-1		55/150/56	

Thermal Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Characteristics					
Thermal resistance, junction - case	R_{thJC}	-		3.1	K/W
Thermal resistance, junction - ambient, leded	R_{thJA}	-	-	100	
SMD version, device on PCB:	R_{thJA}				
@ min. footprint		-	-	75	
@ 6 cm^2 cooling area[1)]		-	-	50	

Electrical Characteristics, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Static Characteristics					
Drain- source breakdown voltage V_{GS} = 0 V, I_D = 0.25 mA	$V_{(BR)DSS}$	200	-	-	V
Gate threshold voltage, V_{GS} = V_{DS} I_D = 1 mA	$V_{GS(th)}$	2.1	3	4	
Zero gate voltage drain current	I_{DSS}				µA
V_{DS} = 200 V, V_{GS} = 0 V, T_j = 25 °C		-	0.1	1	
V_{DS} = 200 V, V_{GS} = 0 V, T_j = 125 °C		-	-	100	
Gate-source leakage current V_{GS} = 20 V, V_{DS} = 0 V	I_{GSS}	-	10	100	nA
Drain-Source on-state resistance	$R_{DS(on)}$				Ω
V_{GS} = 10 V, I_D = 4.5 A		-	0.3	0.4	

1 Device on 40mm*40mm*1.5mm epoxy PCB FR4 with 6 cm2 (one layer, 70µm thick) copper area for drain connection. PCB is vertical without blown air.

Electrical Characteristics, at T_j = 25 °C, unless otherwise specified


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Dynamic Characteristics					
Transconductance $V_{DS}\geq 2*I_D*R_{DS(on)max}$, I_D = 4.5 A	g_{fs}	3	4.2	-	S
Input capacitance V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz	C_{iss}	-	400	530	pF
Output capacitance V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz	C_{oss}	-	85	130	
Reverse transfer capacitance V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz	C_{rss}	-	45	70	
Turn-on delay time V_{DD} = 30 V, V_{GS} = 10 V, I_D = 3 A, R_G = 50 Ω	$t_{d(on)}$	-	10	15	ns
Rise time V_{DD} = 30 V, V_{GS} = 10 V, I_D = 3 A, R_G = 50 Ω	t_r	-	40	60	
Turn-off delay time V_{DD} = 30 V, V_{GS} = 10 V, I_D = 3 A, R_G = 50 Ω	$t_{d(off)}$	-	55	75	
Fall time V_{DD} = 30 V, V_{GS} = 10 V, I_D = 3 A, R_G = 50 Ω	t_f	-	30	40	

Electrical Characteristics, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Dynamic Characteristics					
Gate to source charge V_{DD} = 160 V, I_D = 7 A	Q_{gs}	-	5	7.5	nC
Gate to drain charge V_{DD} = 160 V, I_D = 7 A	Q_{gd}	-	10	22.5	
Gate charge total V_{DD} = 160 V, I_D = 7 A, V_{GS} = 0 to 10 V	Q_g	-	21	31.5	
Gate plateau voltage V_{DD} = 160 V, I_D = 7 A	$V_{(plateau)}$	-	7	-	V
Reverse Diode					
Inverse diode continuous forward current T_C = 25 °C	I_S	-	-	7	A
Inverse diode direct current,pulsed T_C = 25 °C	I_{SM}	-	-	28	
Inverse diode forward voltage V_{GS} = 0 V, I_F = 14 A	V_{SD}	-	1.3	1.7	V
Reverse recovery time V_R = 100 V, I_F=I_S , di_F/dt = 100 A/µs	t_{rr}	-	200	300	ns
Reverse recovery charge V_R = 100 V, I_F=I_S , di_F/dt = 100 A/µs	Q_{rr}	-	0.6	0.9	µC

Power Dissipation


$P_{tot} = f(T_C)$

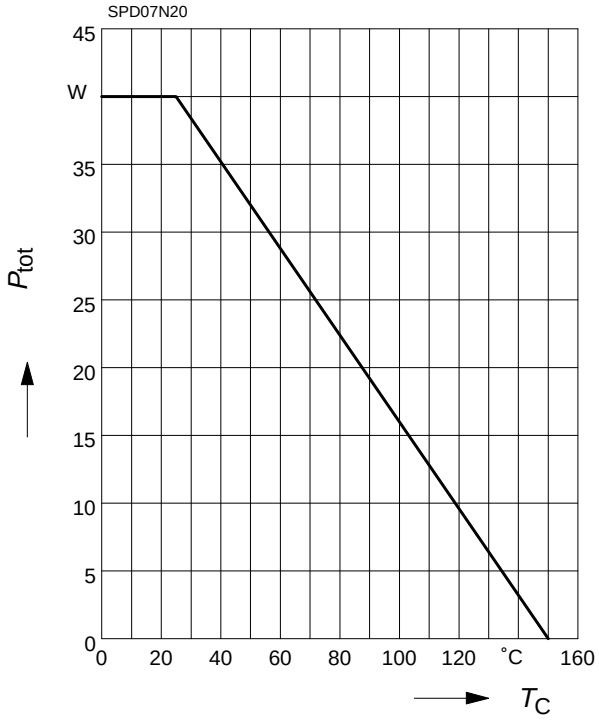

Drain current

$I_D = f(T_C)$


parameter: $V_{GS} \geq 10$ V

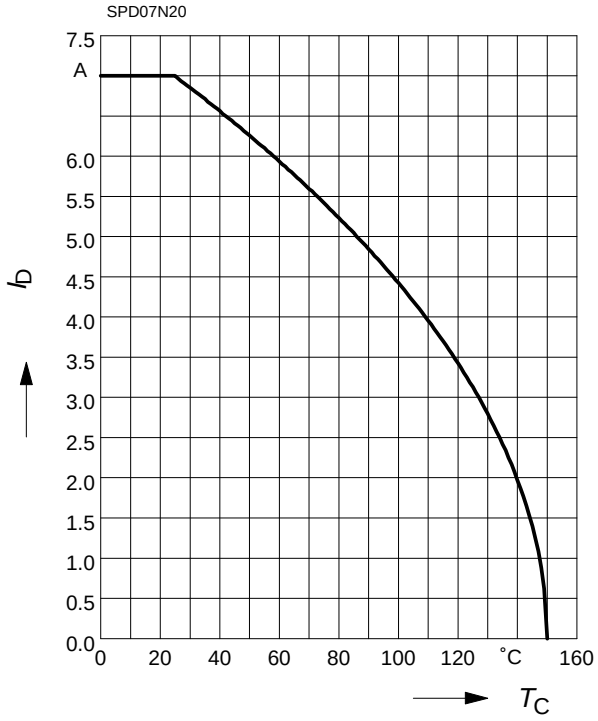

Safe operating area

$I_D = f(V_{DS})$


parameter : $D = 0$, $T_C = 25$ °C

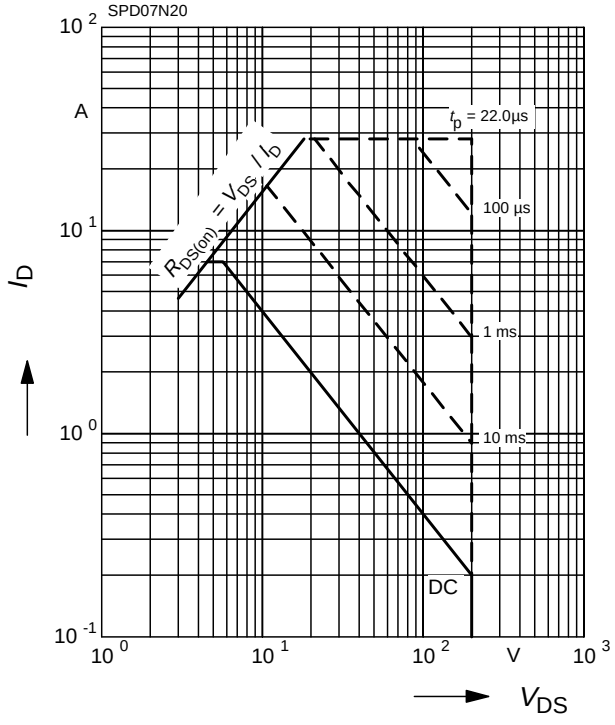

Transient thermal impedance

$Z_{thJC} = f(t_p)$


parameter : $D = t_p / T$

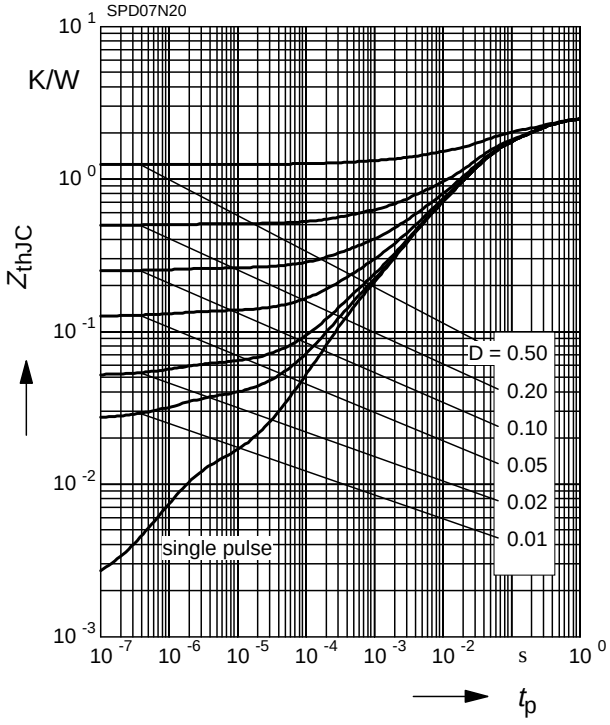

Typ. output characteristics

$I_D = f(V_{DS})$


parameter: t_p = 80 µs

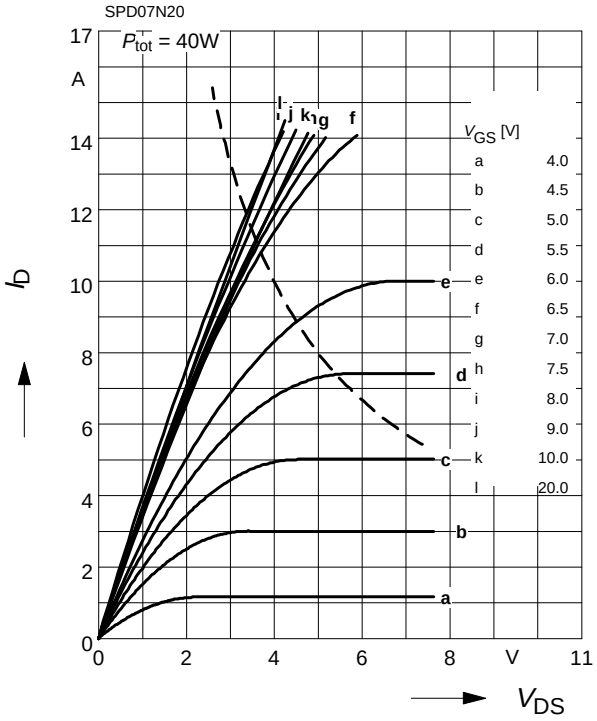

Typ. drain-source-on-resistance

$R_{DS(on)} = f(I_D)$


parameter: V_{GS}

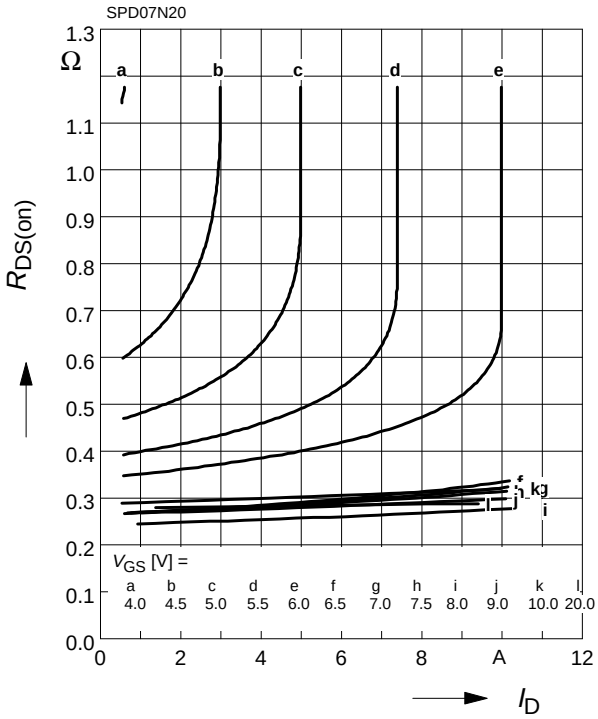

Typ. transfer characteristics $I_D = f(V_{GS})$

parameter: t_p = 80 µs


$V_{DS} \geq 2 \times I_D \times R_{DS(on)\,max}$

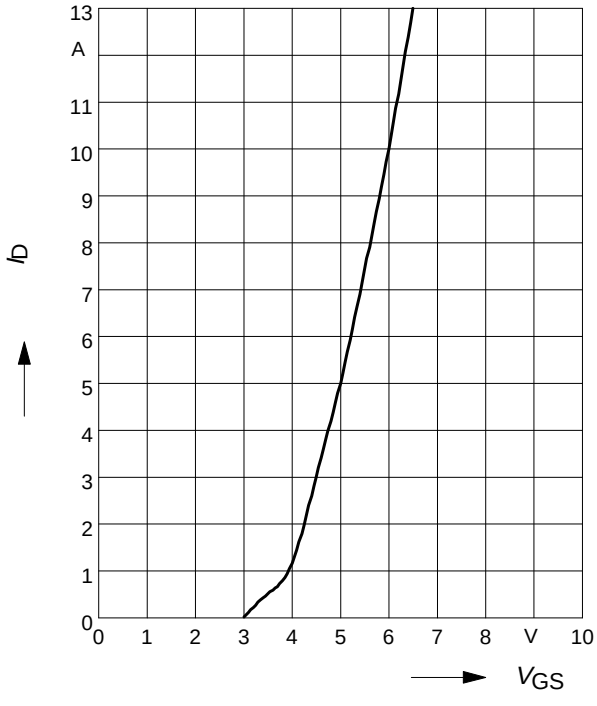

Typ. forward transconductance

$g_{fs} = f(I_D)$; T_j = 25°C


parameter: g_{fs}

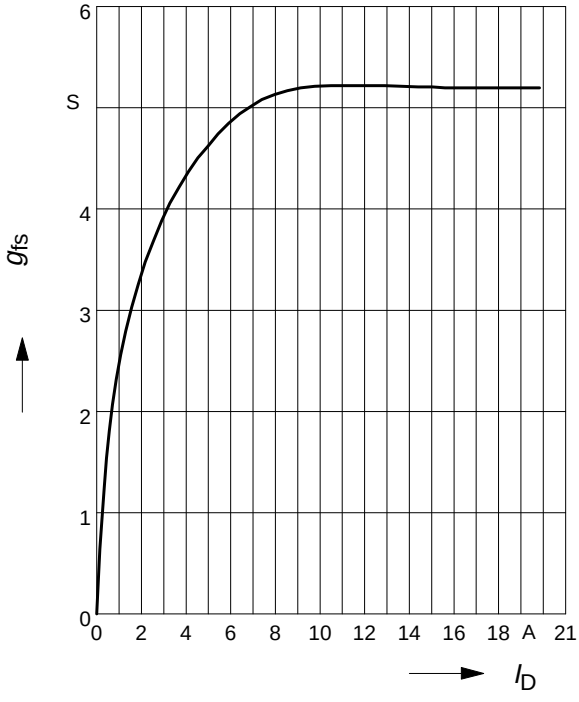

Drain-source on-resistance

$R_{DS(on)} = f(T_j)$


parameter : I_D = 4.5 A, V_{GS} = 10 V

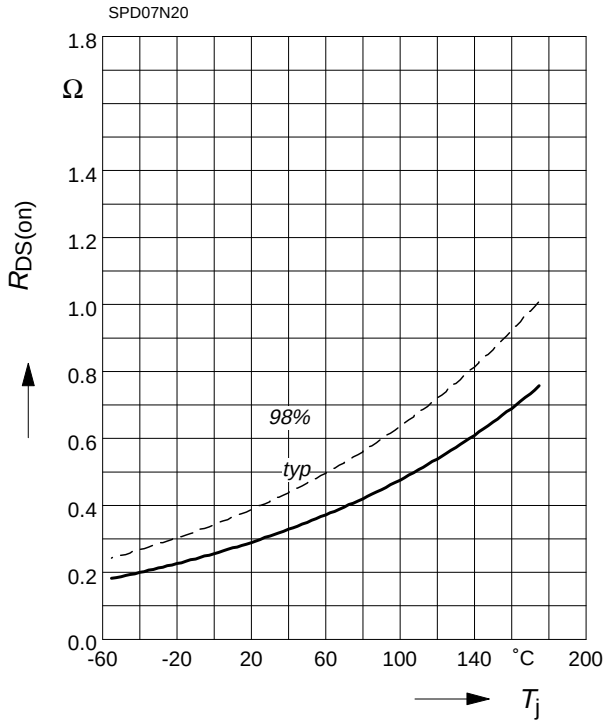

Gate threshold voltage

$V_{GS(th)} = f(T_j)$


parameter : $V_{GS} = V_{DS}$, I_D = 1 mA

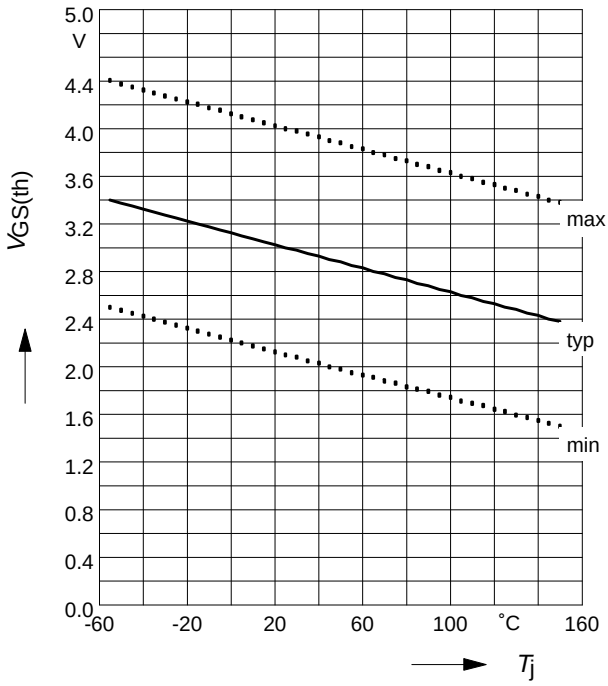

Typ. capacitances

C = $f(V_{DS})$


parameter: V_{GS} = 0 V, f = 1 MHz

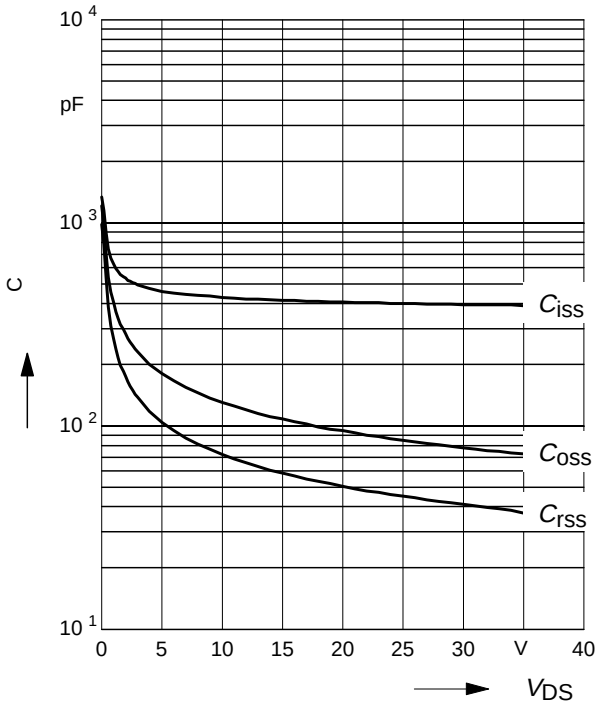

Forward characteristics of reverse diode

$I_F = f(V_{SD})$


parameter: T_j , t_p = 80 µs

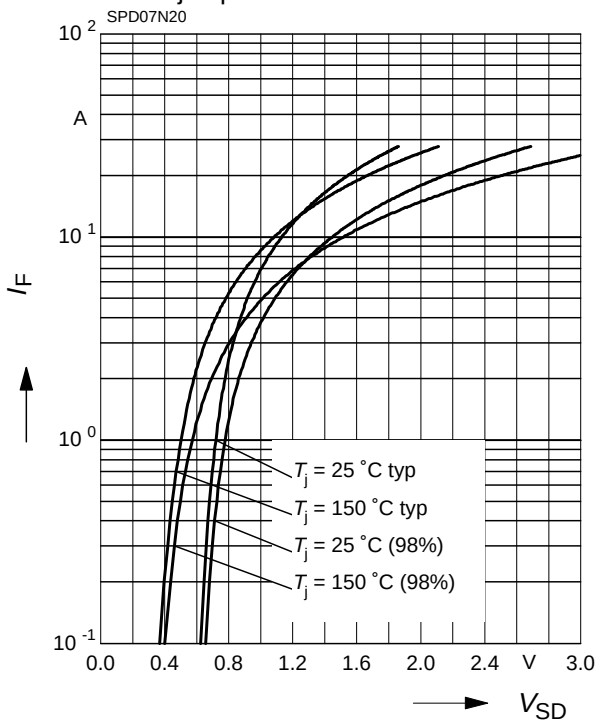

Avalanche Energy $E_{AS} = f(T_j)$

parameter: I_D = 7 A, V_{DD} = 50 V


R_{GS} = 25 Ω

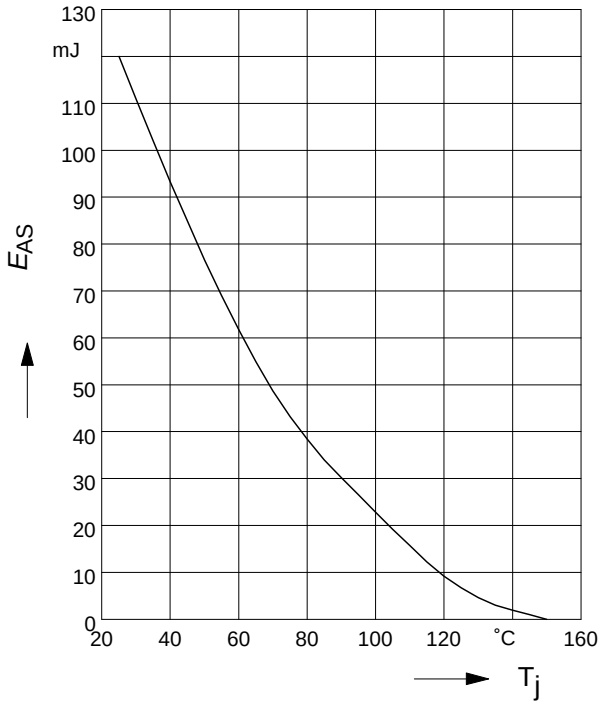

Typ. gate charge

$V_{GS} = f(Q_{Gate})$

parameter: $I_{D\ puls}$ = 7 A

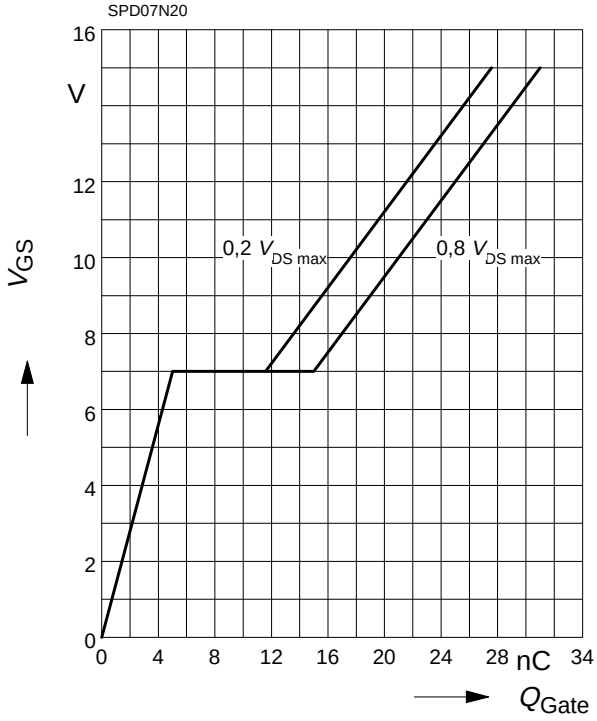

Drain-source breakdown voltage

$V_{(BR)DSS} = f(T_j)$

