
PROTEK DEVICES
Only One Name Means ProTek'Tion™

P0402FC3.3C* thru P0402FC36C*

FLIP CHIP ARRAY

APPLICATIONS

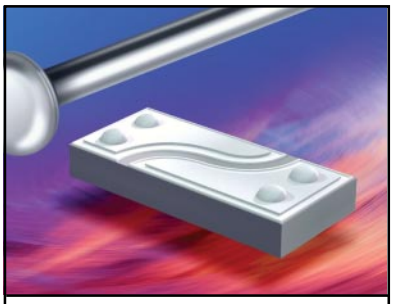

0402

- ✔ Cellular Phones
- ✔ MCM Boards
- ✔ Wireless Communication Circuits
- ✔ IR LEDs
- ✔ SMART & PCMCIA Cards

IEC COMPATIBILITY (EN61000-4)

- ✔ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✔ 61000-4-4 (EFT): 40A - 5/50ns


FEATURES

- ✔ ESD Protection > 25 kilovolts
- ✔ Available in Multiple Voltage Types Ranging From 3.3V to 36V
- ✔ 250 Watts Peak Pulse Power per Line (tp = 8/20µs)
- ✔ Bidirectional Configuration & Monolithic Structure
- ✔ Protects 1 Line
- ✔ RoHS Compliant in Lead-Free Versions

MECHANICAL CHARACTERISTICS

- ✔ Standard EIA Chip Size: 0402
- ✔ Weight 0.73 milligrams (Approximate)
- ✔ Available in Tin-Lead or Lead-Free Plating
- ✔ Solder Reflow Temperature:
  - Tin-Lead - Sn/Pb, 85/15: 240-245°C
  - Lead-Free - Sn/Ag/Cu, 96/3.5/0.5: 260-270°C
- ✔ Flammability Rating UL 94V-0
- ✔ 8mm Plastic & Paper Tape and Reel Per EIA Standard 481
- ✔ Device Marking On Reel
- ✔ Top Contacts: Solder Bump 0.004" in Height (Nominal)

PIN CONFIGURATION



*U.S. Patent No. Des. "D456,367S"

DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power (t_p = 8/20µs) - See Figure 1	P_{PP}	250	Watts
Operating Temperature	T_J	-55°C to 150°C	°C
Storage Temperature	T_{STG}	-55°C to 150°C	°C

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified						
PART NUMBER (See Note 1)	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1mA $V_{(BR)}$ VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ I_P = 1A V_C VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @8/20µs V_C @ I_{PP}	MAXIMUM LEAKAGE CURRENT (See Note 2) @V_{WM} I_D µA	TYPICAL CAPACITANCE @0V, 1 MHz C pF
P0402FC3.3C	3.3	4.0	7.0	12.5V @ 20A	75*	150
P0402FC05C	5.0	6.0	9.8	14.7V @ 17A	10**	100
P0402FC08C	8.0	8.5	13.4	19.2V @ 13A	10***	75
P0402FC12C	12.0	13.3	19.0	29.7V @ 9.0A	1	50
P0402FC15C	15.0	16.7	24.0	35.7V @ 7.0A	1	40
P0402FC24C	24.0	26.7	43.0	55.0V @ 5.0A	1	30
P0402FC36C	36.0	40.0	64.0	84.0V @ 3.0A	1	25

Note 1: All devices are bidirectional. Electrical characteristics apply in both directions.
Note 2: *Maximum leakage current < 5µA @ 2.8V. **Maximum leakage current <500nA @ 3.3V. ***Maximum leakage current <200nA @ 5V.

FIGURE 1
PEAK PULSE POWER VS PULSE TIME


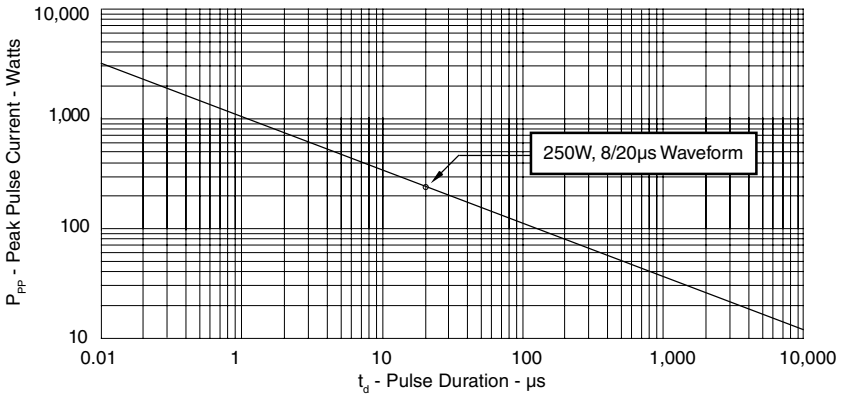


FIGURE 2
PULSE WAVE FORM

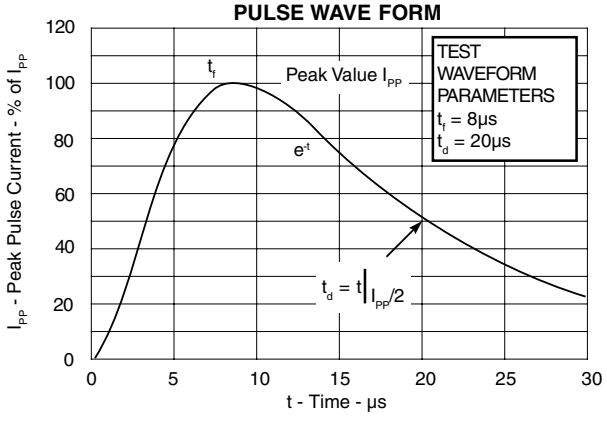

*U.S. Patent No. Des. "D456,367S"

GRAPHS

FIGURE 3
POWER DERATING CURVE

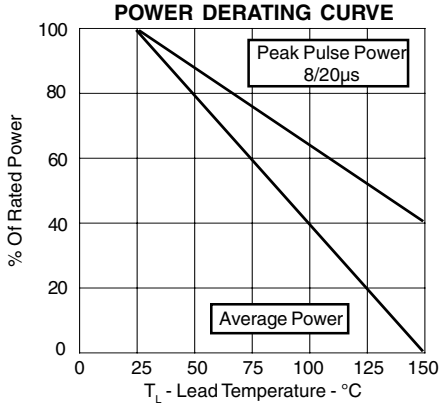


FIGURE 4
OVERSHOOT & CLAMPING VOLTAGE FOR P0402FC05C


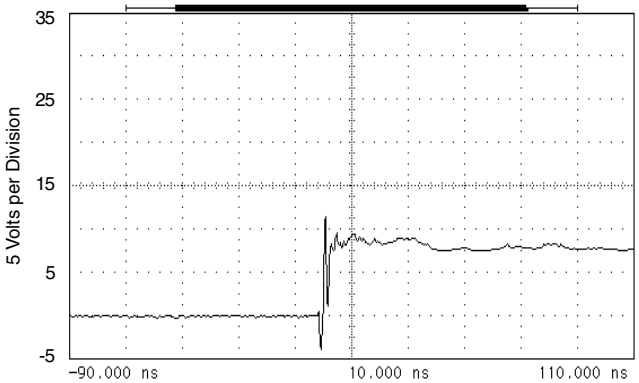


FIGURE 5
TYPICAL CLAMPING VOLTAGE VS PEAK PULSE CURRENT FOR P0402FC05C

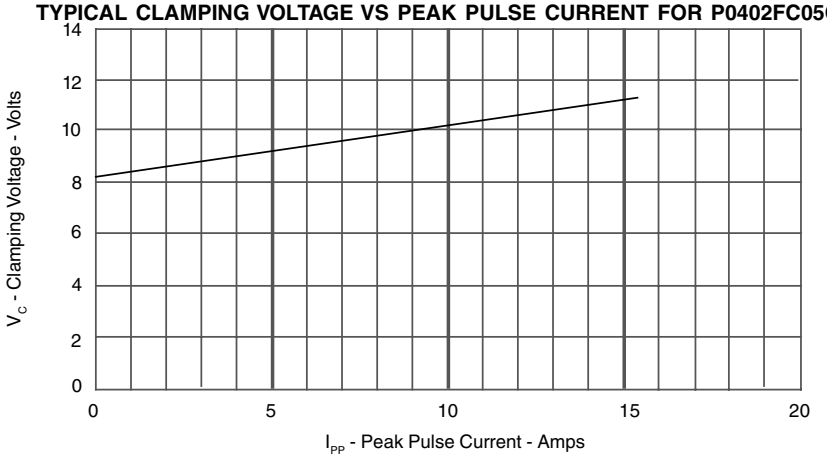

*U.S. Patent No. Des. "D456,367S"

APPLICATION INFORMATION

PRINTED CIRCUIT BOARD RECOMMENDATIONS	
PARAMETER	**VALUE**
Pad Size on PCB	0.275mm
Pad Shape	Round
Pad Definition	Non-Solder Mask Defined Pads
Solder Mask Opening	0.325mm Round
Solder Stencil Thickness	0.150mm
Solder Stencil Aperture Opening (laser cut, 5% tapered walls)	0.330mm Round
Solder Paste Type	No Clean
Pad Protective Finish	OSP(Entek Cu Plus 106A)
Tolerance - Edge To Corner Ball	±50µm
Solder Ball Side Coplanarity	±20µm
Maximum Dwell Time Above Liquidous (183°C)	60 Seconds
Soldering Maximum Temperature	270°C

REQUIREMENTS


Temperature:


T_P for Lead-Free (SnAgCu): 260-265°C

T_P for Tin-Lead: 240-245°C

Preheat time and temperature depends on solder paste and flux activation temperature, component size, weight, surface area & plating.

RECOMMENDED NON-SOLDER MASK DEFINED PAD ILLUSTRATION

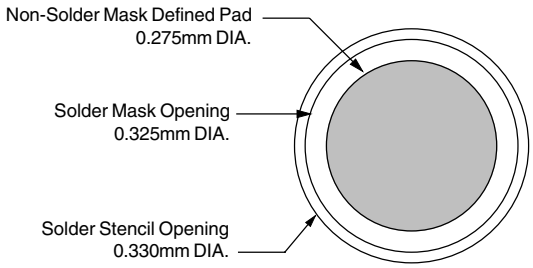


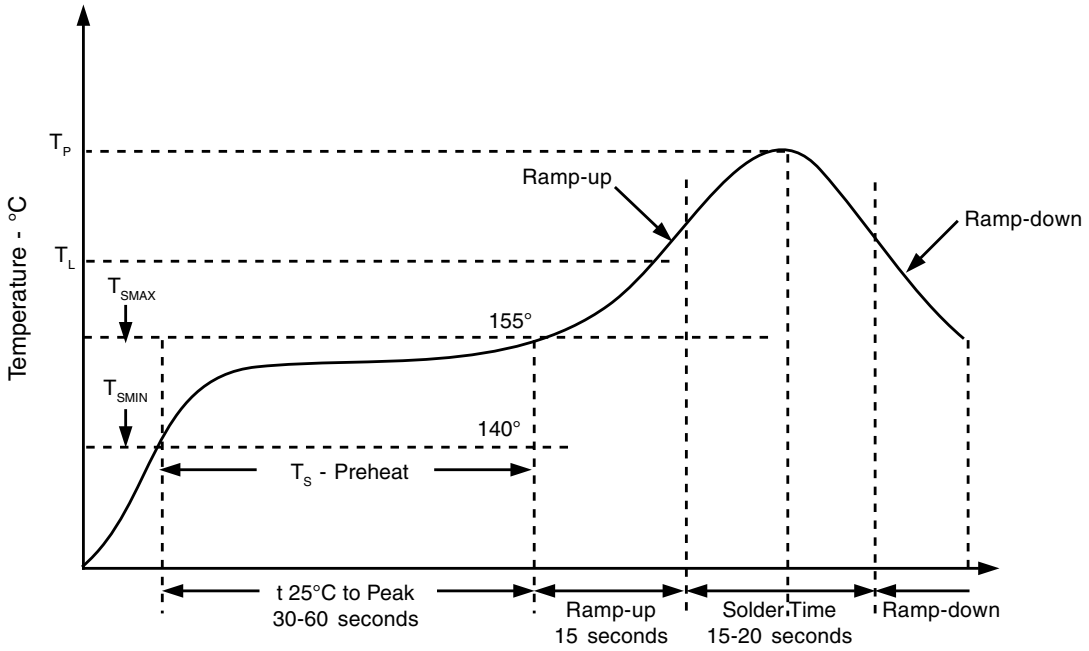

*U.S. Patent No. Des. "D456,367S"

PACKAGE OUTLINE & DIMENSIONS

PACKAGE OUTLINE

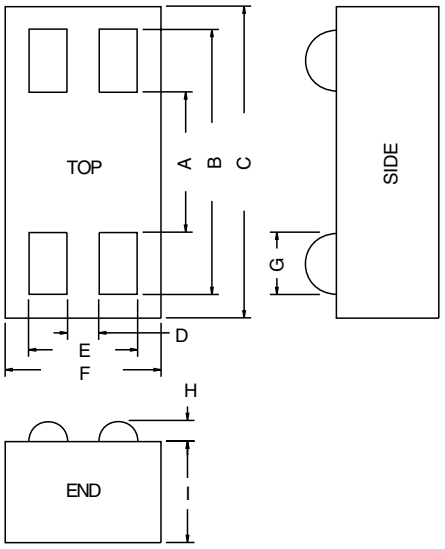

0402




PACKAGE DIMENSIONS

DIM	MILLIMETERS	INCHES
A	0.46 NOM	0.018 NOM
B	0.86 NOM	0.034 NOM
C	0.99 ± 0.0254	0.039 ± 0.001
D	0.10 NOM	0.004 NOM
E	0.35 NOM	0.014 NOM
F	0.483 ± 0.0254	0.019 ± 0.001
G	0.20 NOM	0.008 NOM
H	0.127 MAX	0.005 MAX
	0.076 MIN	0.003 MIN
I	0.406 NOM	0.016 NOM

NOTES:
1. Controlling dimensions in inches.
2. Decimal tolerances for mounting pad and outline: .xxx ± 0.05mm (± 0.002").
3. Maximum chip size: 1.02 (0.040") by 0.51(0.020").

MOUNTING PAD

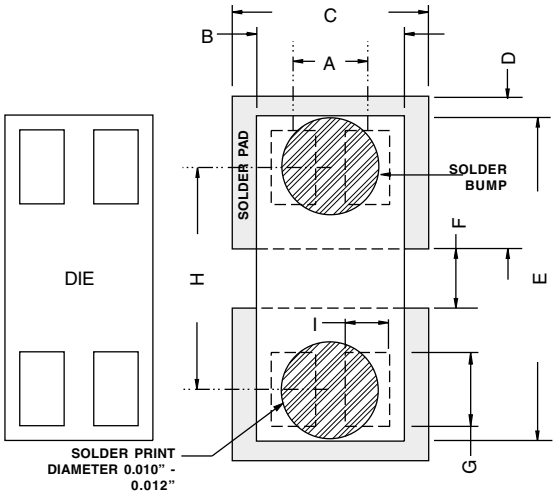


PAD DIMENSIONS

DIM	MILLIMETERS	INCHES
A	0.23	0.009
B	0.48	0.019
C	0.69	0.027
D	0.46	0.018
E	0.99	0.039
F	0.20	0.008
G	0.20	0.008
H	0.66	0.026
I	0.13	0.005

NOTE:
1. Top view of tape. Metal contacts are face down in tape package.

TAPE & REEL ORIENTATION



NOTE:
1. *Preferred:* Using 0.1mm (0.004") stencil.

TAPE & REEL ORDERING NOMENCLATURE

1. Surface mount product is taped and reeled in accordance with EIA 481.
2. *8mm Plastic Tape:* 7 Inch Reels - 5,000 pieces per reel. Ordering Suffix: -T75-1 (i.e., P0402FC05C-T75-1).
3. *8mm Paper Tape:* 7 Inch Reels -10,000 pieces per reel. Ordering Suffix: -T710-2 (i.e., P0402FC05C-T710-2).
4. Suffix - LF = Lead-Free, i.e., *P0402FC05C-LF-T75-1.*

Outline & Dimensions: Rev 3 - 11/02, 06001

COPYRIGHT © ProTek Devices 2005
SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices
2929 South Fair Lane, Tempe, AZ 85282
Tel: 602-431-8101 Fax: 602-431-2288
E-Mail: sales@protekdevices.com
Web Site: www.protekdevices.com