



SHEET 1 OF 1

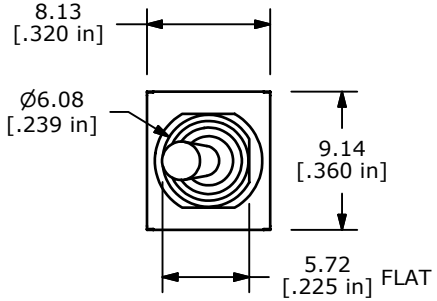






PANEL MOUNTING

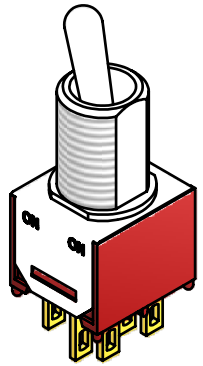



ISOMETRIC

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-3, 5-6	OPEN	2-1, 5-4



CIRCUIT: DPDT

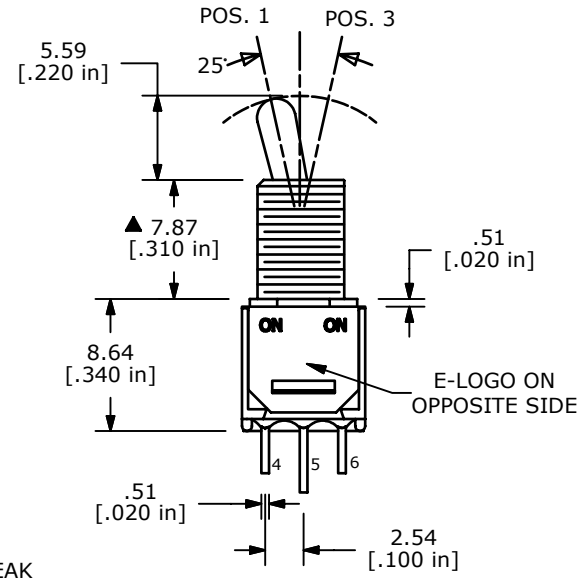

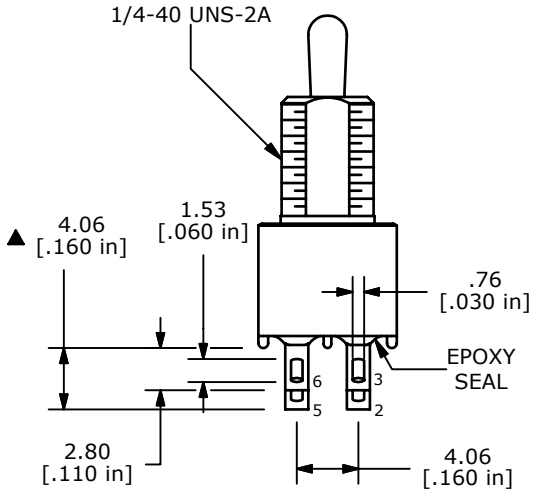

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. ▲ PLATING MATERIAL: SILVER
5. RATING: 3 AMPS @ 120VAC (or 28VDC);
   1 AMP @ 250VAC
6. LIFE EXPECTANCY: 30,000 MAKE-AND-BREAK
   CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT.

REV	PCR NO	DESCRIPTION	DATE	BY
A	18037	RELEASED FOR PRODUCTION	3/27/08	BLR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH™

TITLE 200MDP1T5B5M1QE

SCALE	DATE	DR	DWG	REV
2:1	3/27/2008	BLR	T221065	A