
915.0MHz SAW Resonator**Model: TD0106A****Part No: MA06101****REV NO.: 1**

A. FEATURES:

1. 2-Port Resonator.

B. MAXIMUM RATING:

1. Input Power Level: 0 dBm
2. DC voltage: 12 V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C

C. ELECTRICAL CHARACTERISTICS:

Characteristic	Units	Minimum	Typical	Maximum
Center frequency Fr	MHz	914.850	915.000	915.150
Insertion Loss IL	dB	-	8	9
Equivalent Elements				
Motional capacitance C1	fF	-	0.225	-
Motional inductance L1	μH	-	134.5	-
Motional resistance R1	Ohm	-	125	-
Parallel capacitance Co	pF	-	1.9	-
Temp.coeff.	ppm/c*2	-	0.032	-
Turnover To	deg.C	-	25	-
Package size		SMD 5X5X1.4mm		


915.0MHz SAW Resonator

Model: TD0106A

Part No: MA06101


REV NO.: 1

D. OUTLINE DRAWING:

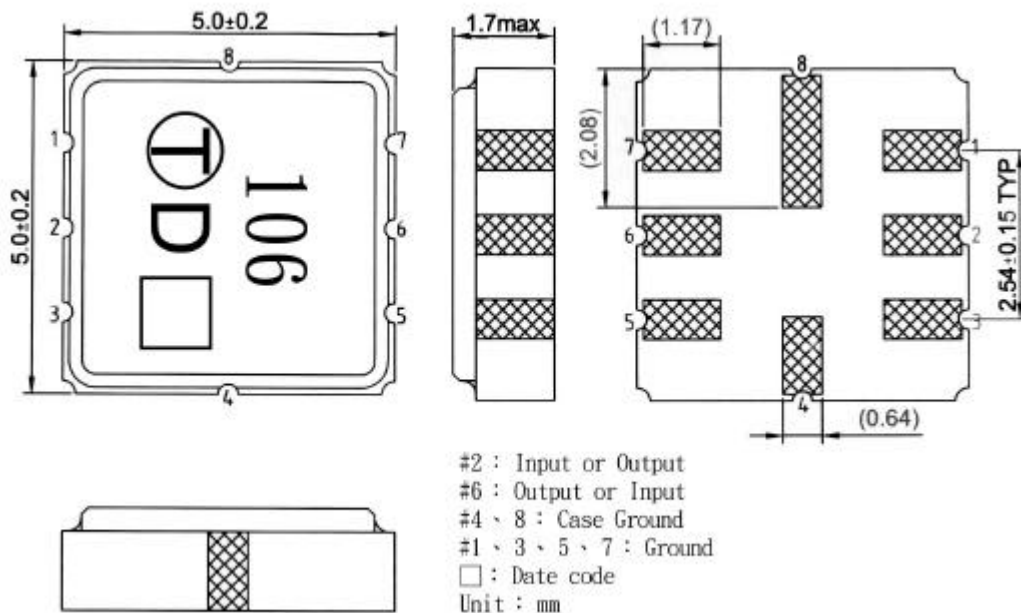

E. EQUIVALENT CIRCUIT:


Two-Port Resonator:

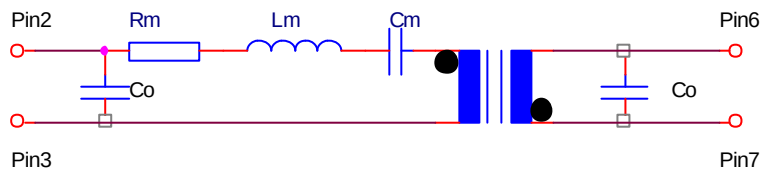

915.0MHz SAW Resonator
Part No: MA06101

Model: TD0106A
REV NO.: 1


F. FREQUENCY CHARACTERISTICS:

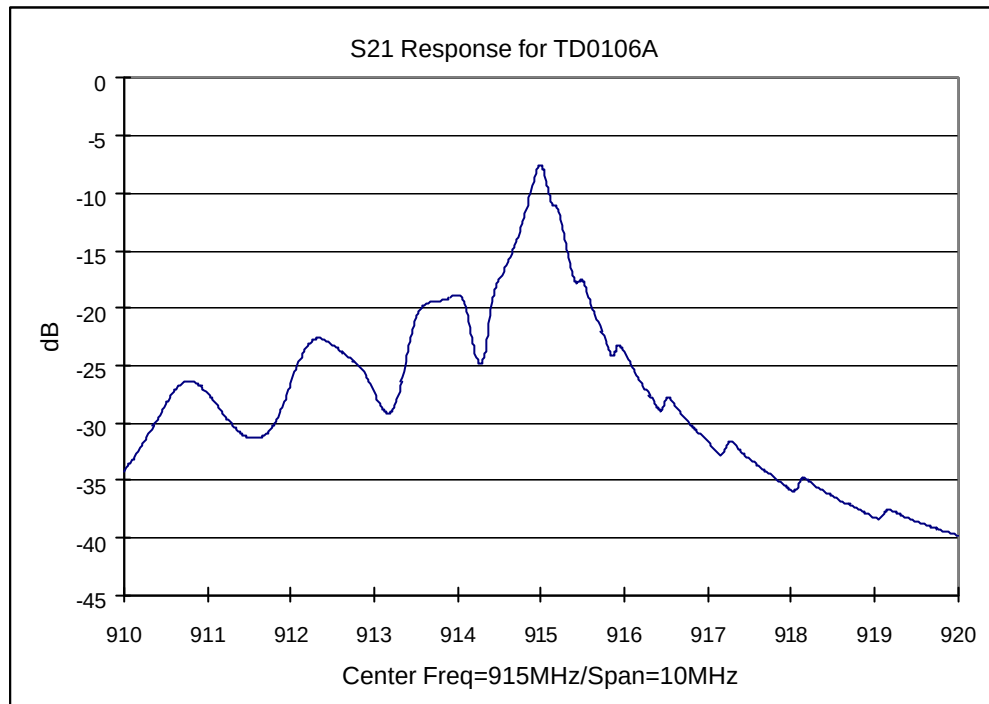

G. TEST CIRCUIT:

Network analyzer

From 50Ω
Network
Analyzer

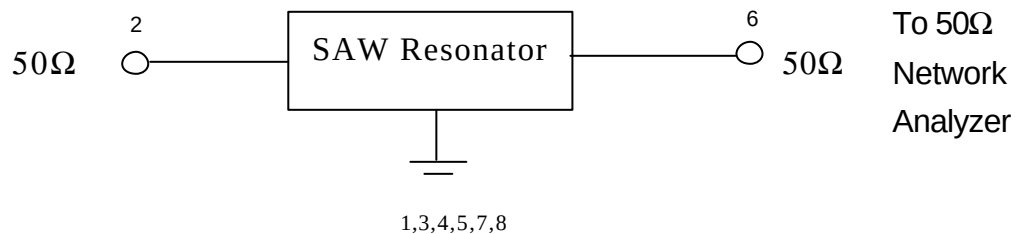

REV NO.: 1