

Power Schottky Rectifier - 2Amp 40~200V

☐ Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction
- Halogen-Free

☐ Mechanical data

- Case : Molded plastic
- Epoxy : UL 94V-0 rate flame retardant
- Lead : Axial leads, solderable per MIL-STD-202,method 208 guaranteed
- Polarity : Color band denotes cathode end
- Mounting position : Any
- Weight : 0.4 grams

☐ Maximum ratings and Electrical characteristics

Parameters		SB240ESH	SB260ESH	SB2100ESH	SB2150ESH	SB2200ESH	UNIT
Maximum Recurrent Peak Reverse Voltage		40	60	100	150	200	V
Maximum RMS Voltage		28	42	70	105	140	V
Maximum DC Blocking Voltage		40	60	100	150	200	V
Maximum Average Forward Rectified Current		2					A
Peak Forward Surge Current		50					A
Maximum Instantaneous Forward Voltage at 2A	Tc = 25°C	0.55	0.65	0.82	0.88	0.90	V
	Tc = 125°C	0.44	0.50	0.66	0.69	0.72	
Maximum Average Reverse Current at Rated DC Blocking Voltage	Tc = 25°C	0.5		0.05			mA
	Tc = 125°C	20		10			
Typical Junction Capacitance		150					pF
Typical Thermal Resistance RθJA		50					°C/W
Operating and Storage Temperature Range		-50 to +150		-50 to +175			°C

June 2010 / Rev.6.6

SB240ESH ~ SB2200ESH

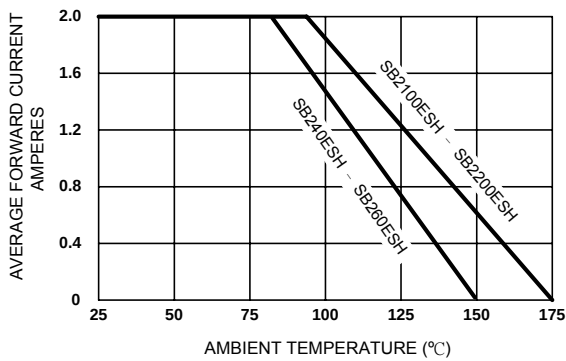


Figure 1. Forward Current Derating Curve

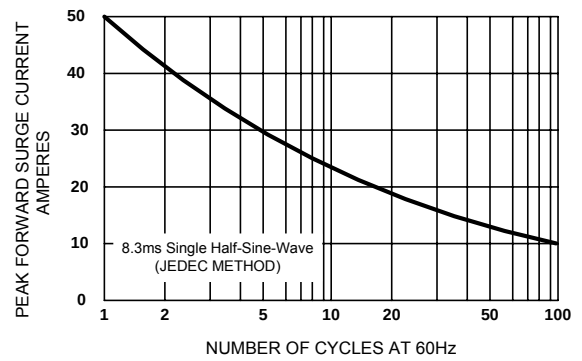


Figure 2. Maximum Non-repetitive Surge Current

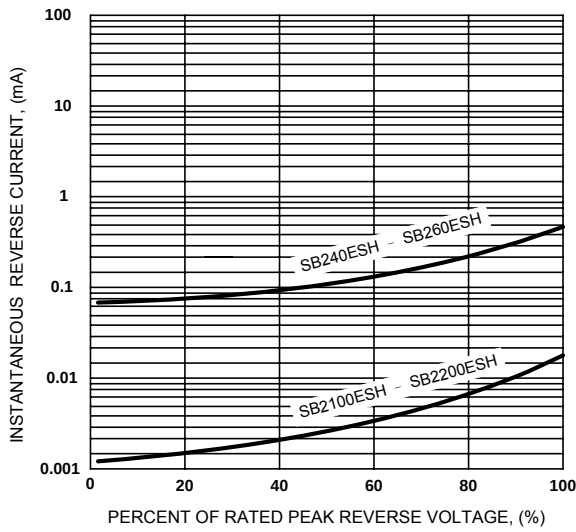


Figure 3. Typical Reverse Characteristics

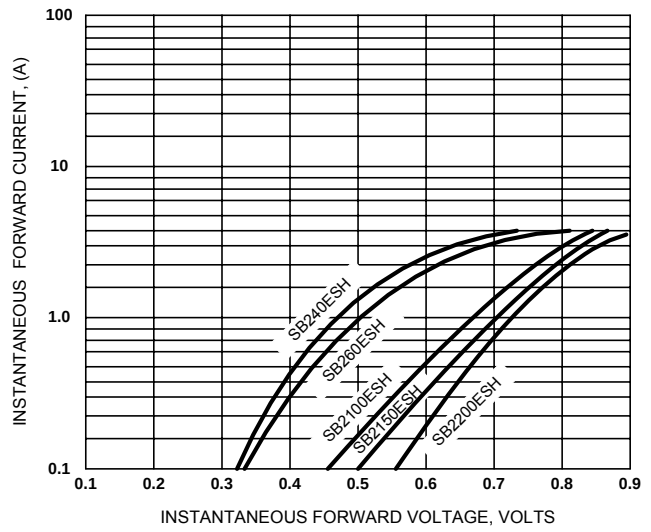


Figure 4. Typical Forward Characteristics

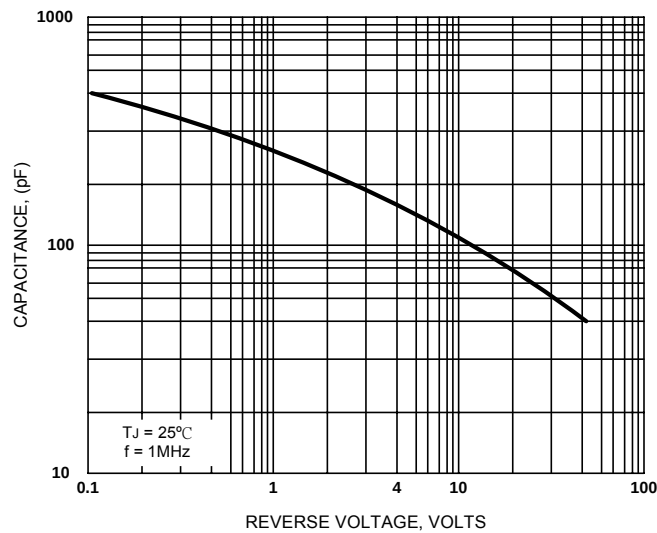


Figure 5. Typical Junction Capacitance



Sirectifier Global Corp., Delaware, U.S.A.

U.S.A.: sgc@sirectsemi.com
China: st@sirectsemi.com

France: ss@sirectsemi.com
Thailand: th@sirectsemi.com

Taiwan: se@sirectsemi.com
Philippines: aiac@sirectsemi.com

Hong Kong: hk@sirectsemi.com
Belize: belize@sirectsemi.com

SB240ESH~SB2200ESH

DO-41

