



Extension cable UC-30GM-Prog

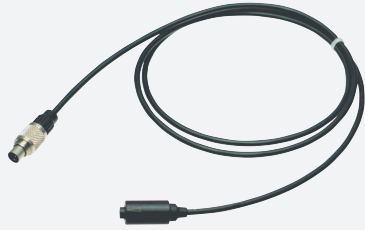

Function

The UC-30GM-PROG extension cable permits the UC...-30GM-... and LUC... series sensors to be taugh-in at inaccessible installation locations. The sensor side end of the extension cable is connected to the sensor's temperature plug socket. The sensor can be programmed with the temperature plug at the other end of the cable.

Dimensions

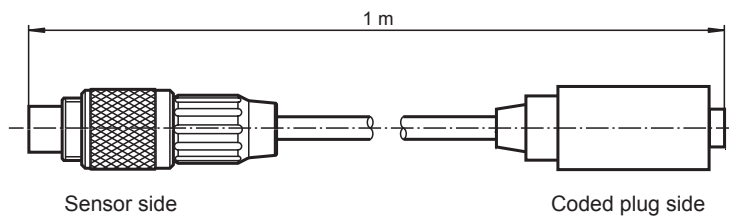

Technical Data

Mechanical specifications

Material	black PVC
Cable	Li Y 11Y 3 x 0.14
Color	black
Mass	20 g

Release date: 2021-02-05 Date of issue: 2021-02-05 Filename: 206733_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com




Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS

Technical Data

Cable length	1 m
--------------	-----

Accessories

	UUV90-M30	Ultrasonic -deflector
	UUV90-K30	Ultrasonic -deflector
	M30K-VE	Plastic nuts with centering ring for the vibration-free mounting of cylindrical sensors