
molex
one company > a world of innovation

This document was generated on 11/30/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0757840011
Status: Active
Overview: iPass™ Connector System
Description: 0.80mm Pitch, iPass I/O Surface Mount Receptacle, Vertical, Internal Assembly with Shell, 26 Circuit, 0.38µm Gold (Au), Surface Mount Option, Tail Length 1.96mm, Right Key

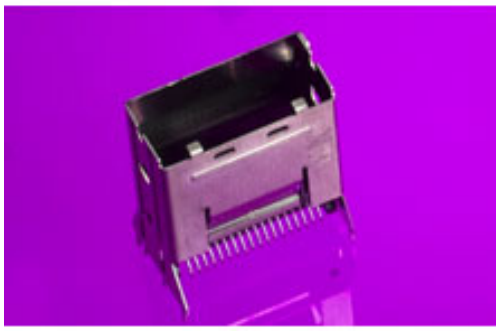

Series image - Reference only

Documents:

- 3D Model
- Drawing (PDF)
- Product Specification PS-75783-001-001 (PDF)
- Application Specification AS-75783-001 (PDF)
- Packaging Specification PK-75784-001 (PDF)
- RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	I/O Connectors
Series	75784
Application	Wire-to-Board
Comments	Positive or passive latching cable available
Component Type	Receptacle
Electrical Model	Yes
Overview	iPass™ Connector System
Product Name	iPass, Mini Multi-Lane, PCI Express
Type	N/A
UPC	822350092975

Physical

Circuits (Loaded)	26
Circuits (maximum)	26
Color - Resin	Black
Durability (mating cycles max)	50
Flammability	94V-0
Gender	Female
Keying to Mating Part	Yes
Lock to Mating Part	None
Material - Metal	Copper-Nickel-Zinc, High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	3.362/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	1.96mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Packaging Type	Embossed Tape on Reel
Panel Mount	No
Pitch - Mating Interface	0.80mm
Pitch - Termination Interface	0.80mm
Plating min - Mating	0.381µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Ports	1
Surface Mount Compatible (SMC)	Yes

EU ELV
Not Relevant

EU RoHS **China RoHS**
Compliant

REACH SVHC
Not Contained Per -ED/01/2017 (12 January 2017)

Halogen-Free Status
Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the Contact Us section for any non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
75784 Series

Use With
iPass Cable Assemblies, 79575 , 79576 , 74562 , 74563 , 79536 , 74573 ,

Temperature Range - Operating	-40°C to +80°C
Termination Interface: Style	Surface Mount and Through Hole
Waterproof / Dustproof	No
Wire Insulation Diameter	N/A
Wire Size AWG	N/A

Electrical

Current - Maximum per Contact	0.5A
Grounding to Panel	None
Voltage - Maximum	30V AC (RMS)/DC

Solder Process Data

Duration at Max. Process Temperature (seconds)	020
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Application Specification	AS-75783-001
Electrical Model Document	EE-75577-001
Packaging Specification	PK-75784-001
Product Specification	PS-75783-001-001
S-Parameter Model	SP-75577-001
Sales Drawing	SD-75784-001