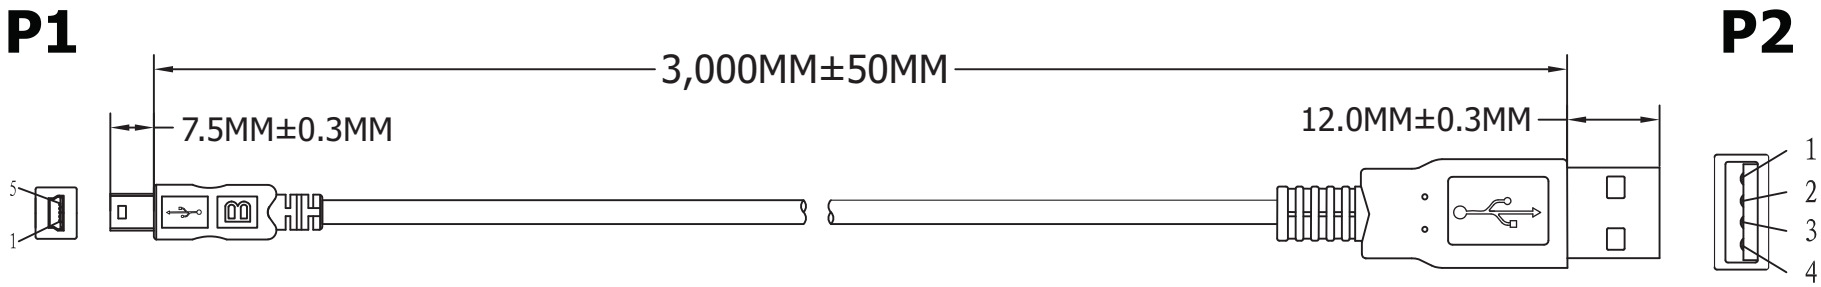

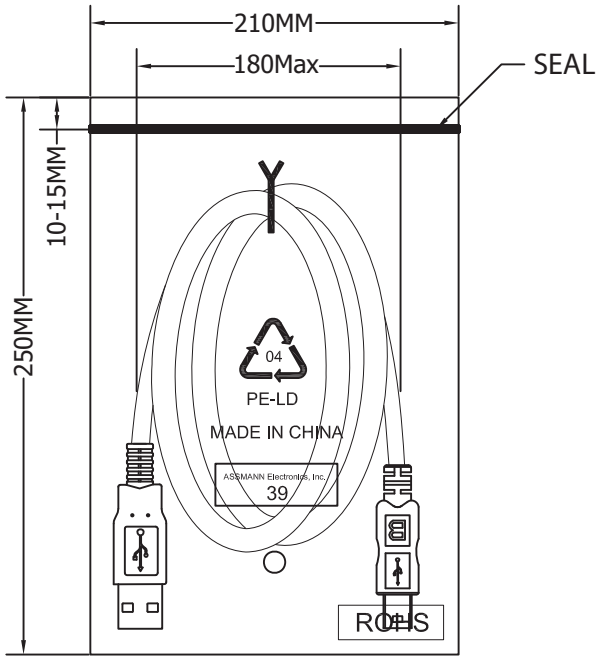

1PCS / PE BAG

Material:

- Cable: Black USB2.0 UL2725 28#/1P+28#/2C+AEB
  - OD: 3.8MM
- P1 Connector: USB Mini 4P Male
  - Pin: G/F
  - 3PCS Type
  - Insulator Color: Black
  - Shell: Nickel
  - Outer Jacket: Black PVC-40P
- P2 Connector: USB A Male
  - Pin: G/F
  - 4PCS Type
  - Insulator Color: White
  - Shell: Nickel
  - Outer Jacket: Grey

Electrical:

- 100% Open, short & mis wire test
- Contact Resistance: 5Ω Max.
- Insulation Resistance: 10MΩ Min.
- Dielectric Test: 300V DC

PIN ASSIGNMENT

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
5	BLACK	4
SHELL	DRAIN + BRAID	SHELL

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	08.29.11	Chappell
Approved		

ASSMANN WSW components

Item No.

AK670M-3-GR-R

Title USB 1.1 Mini Cable, Mini 4P Male <=> A Male, 30µ" Gold, Grey, 3 Meters

Drawing No.

rev00

Replace

Sheet