AUK Semiconductor

SY3517-E / SY3517-E(B)


LED Lamp

Features

- Yellow colored diffusion transparency lens type
- ϕ3mm(T-1) all plastic mold type
- Low power consumption

Outline Dimensions


unit : mm

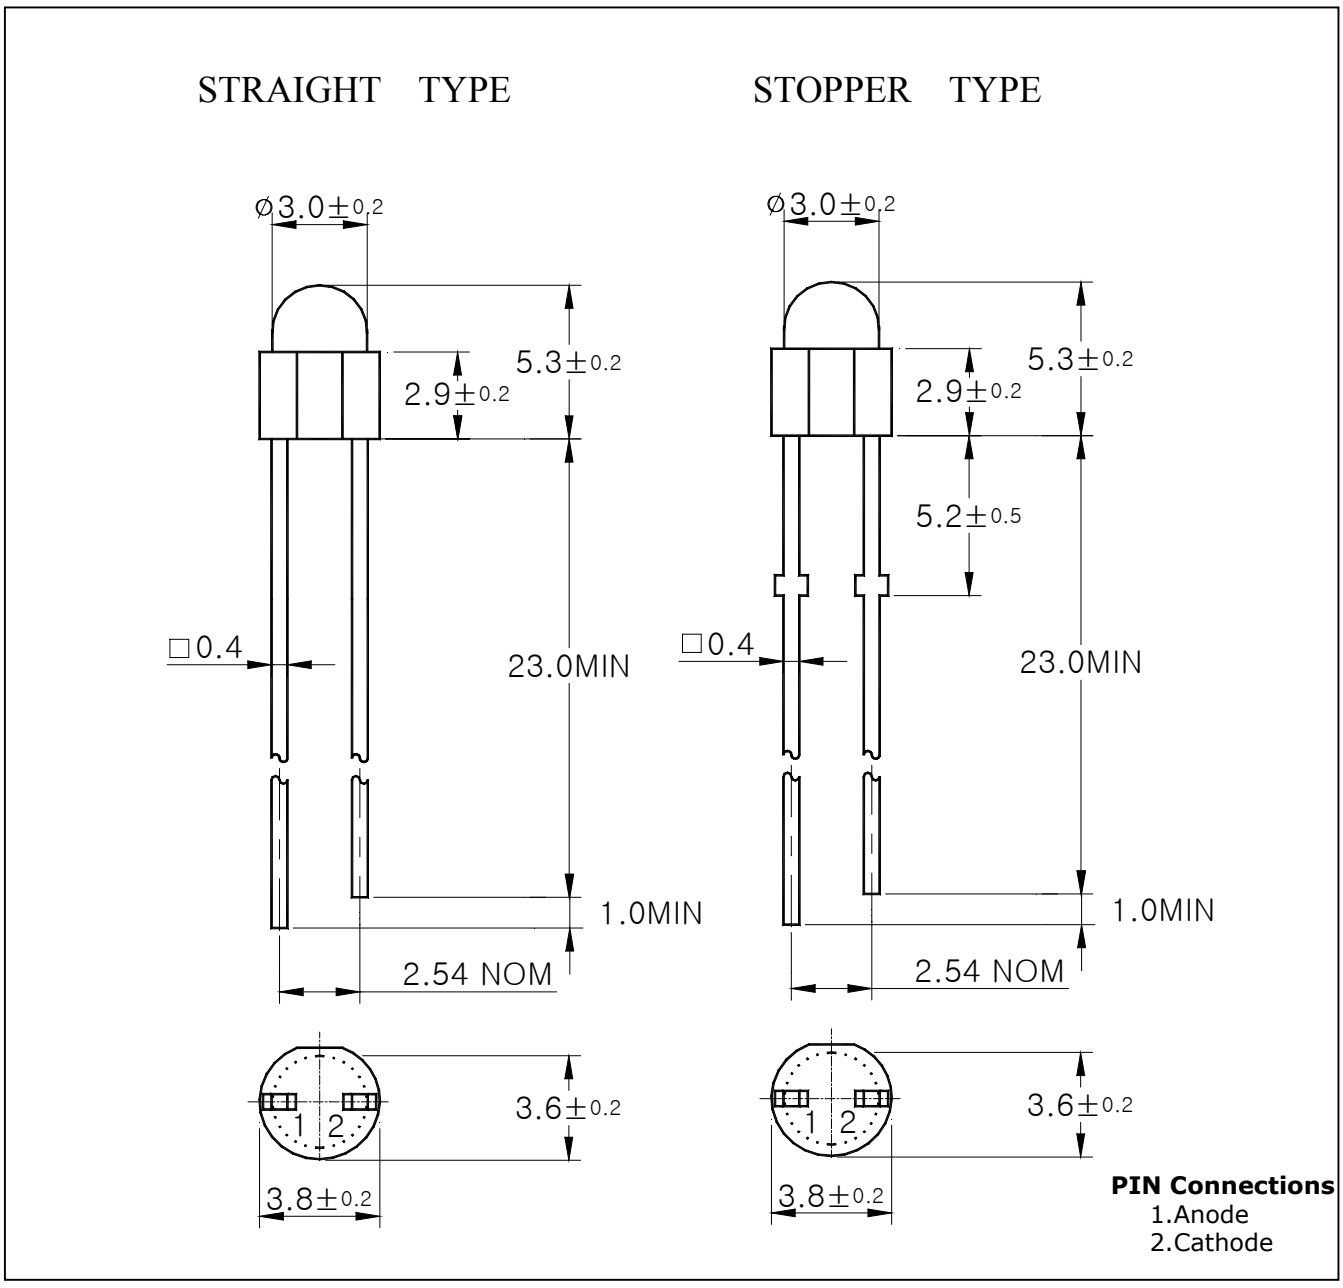

Absolute maximum ratings

Characteristic	Symbol	Ratings	Unit
Power Dissipation	P_D	85	mW
Forward Current	I_F	30	mA
*[1]Peak Forward Current	I_{FP}	50	mA
Reverse Voltage	V_R	4	V
Operating Temperature	T_{opr}	-25～85	℃
Storage Temperature	T_{stg}	-30～100	℃
*[2]Soldering Temperature	T_{sol}	260℃ for 5 seconds	

*1.Duty ratio = 1/16, Pulse width = 0.1ms
*2.Keep the distance more than 2.0mm from PCB to the bottom of LED package



Electrical Characteristics

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	I_F= 20mA	-	2.0	2.7	V
Luminous Intensity	I_V	I_F= 20mA	155	338	520	mcd
Peak Wavelength	λ_P	I_F= 20mA	-	585	-	nm
Spectrum Bandwidth	$\Delta\lambda$	I_F= 20mA	-	30	-	nm
Reverse Current	I_R	V_R=4V	-	-	10	uA
*[3]Half angle	θ1/2	I_F= 20mA	-	±25	-	deg

*3. Luminous Intensity Maximum tolerance for each Grade Classification limit is ±18%

*3. Luminous Intensity classification

M	N	O
155~230	230~350	350~520

*4. θ1/2 is the off-axis angle where the luminous intensity is 1/2 the peak intensity

Characteristic Diagrams

Fig. 1 I_F - V_F

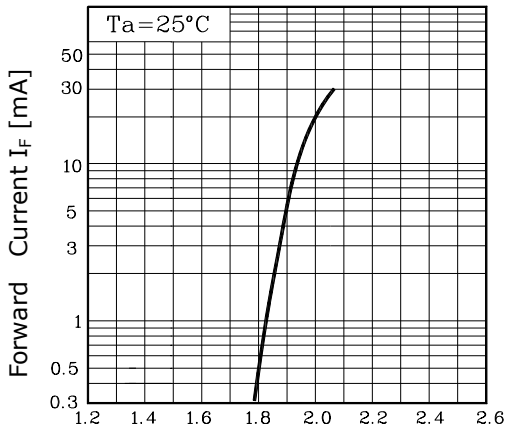


Fig. 2 I_V - I_F

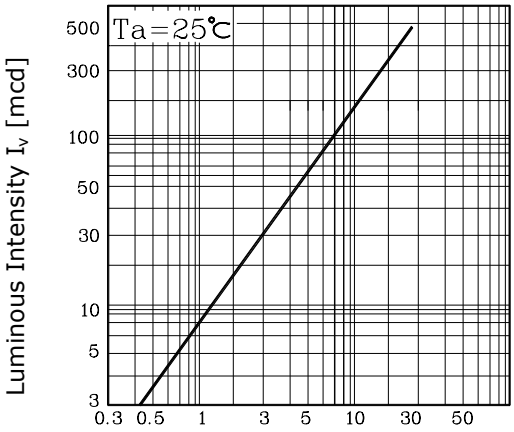


Fig. 3 I_F – Ta

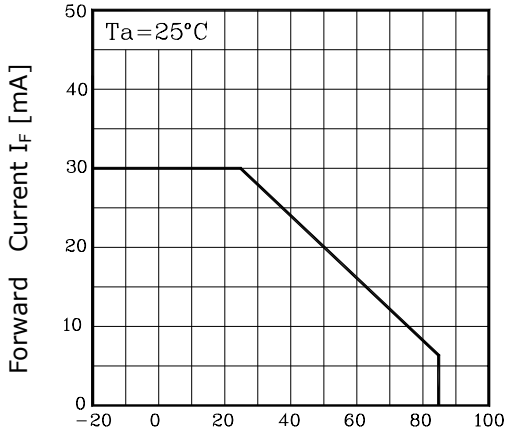


Fig.4 Spectrum Distribution

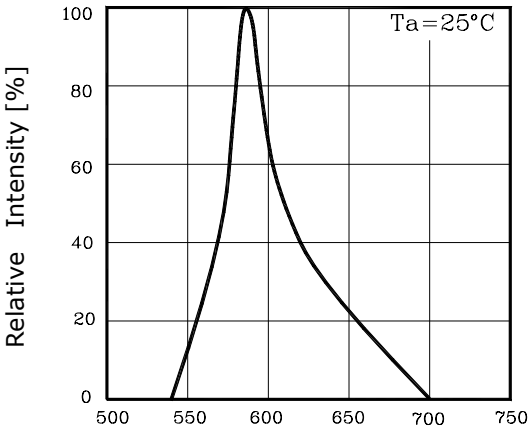


Fig. 5 Radiation Diagram

