


ERA-FWB Series

General Description

ER-series is an open frame, low cost switcher with high efficiency. 65 different models are available from low to medium power. Low power modules use a simple RCC circuit while higher power supplies employ a forward converter.

Features

1. Cost effective
2. High efficiency
3. No derating without cover and horizontal mounting
4. Over voltage protection

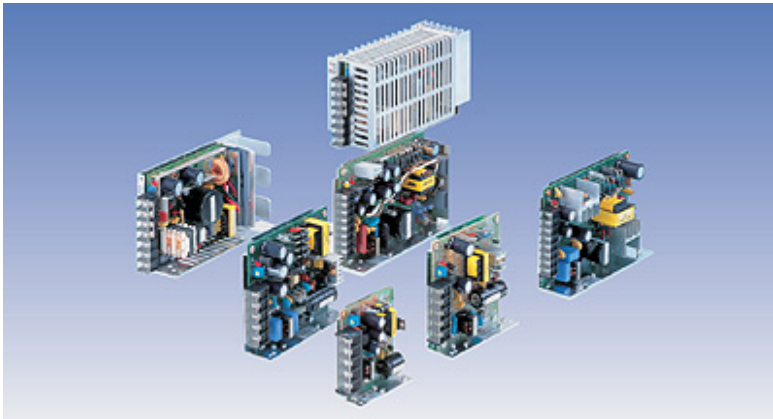


Options

Case cover (add suffix "-P")
"-P" model dimension is same as "without cover" model

Specifications<AC/DC>	Model			
	ERA21FWB-B	ERA22FWB	ERA23FWB	ERA24FWB-B
ERA**FWB 25WATTS/2OUTPUTS				
Input Characteristic				
Input Voltage	AC200V(DC260V)			
Input Range	AC170-264V(DC220-350V)			
Input Frequency	50/60Hz			
Input Frequency Range	47-440Hz			
Phase	Single			
Inrush Current *1	30A(maximum)at AC200V			
Efficiency [%] (typical) *2	70	70	70	70

Dimension (mm)

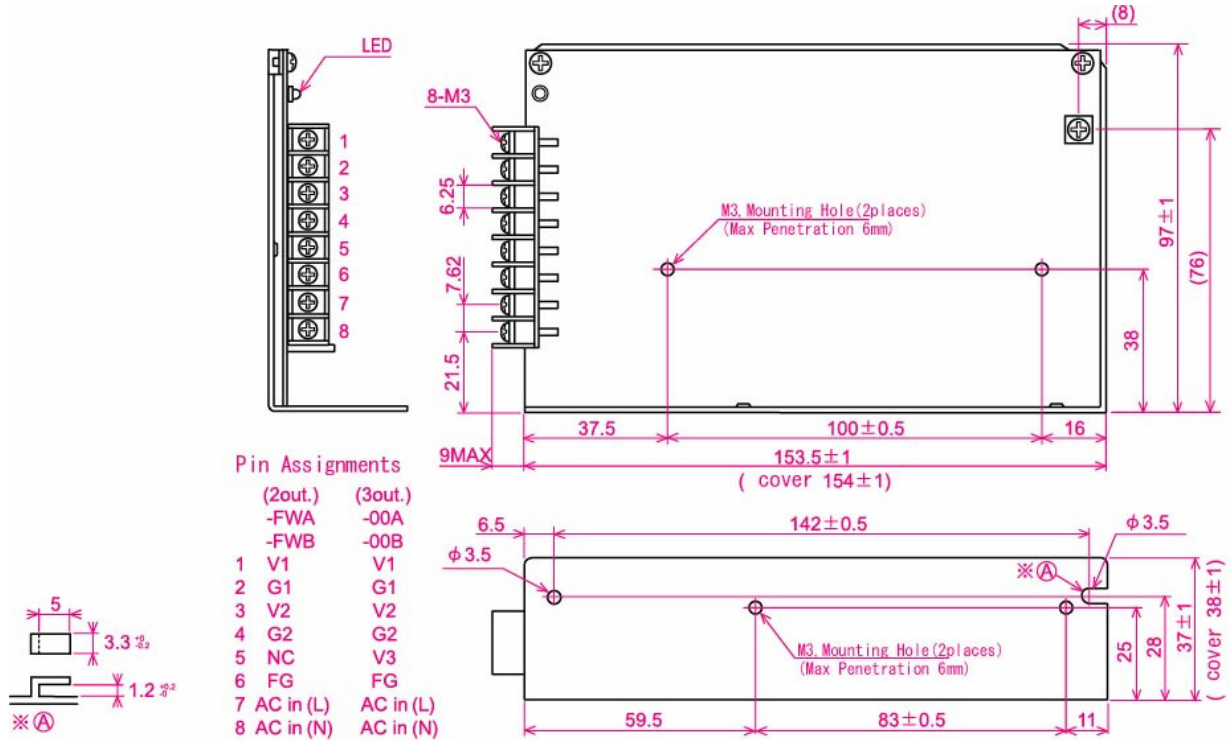

ERT**FWA Specification

Specifications<AC/DC>	Model							
ERA**FWB 50WATTS/2OUTPUTS	ERA21FWB-B	ERA22FWB	ERA23FWB	ERA24FWB-B	ERA21FWB-B	ERA22FWB	ERA23FWB	ERA24FWB-B
Output Characteristic								
Output Voltage [V]	24	5	12	12	15	15	24	5
Output Current [A]	0.2-0.85	0.9	0.2-1.2	0.9	0.2-0.85	0.85	0.2-1.7	0.9
Voltage Adjust Range	V1:+3%/-0% of Rated Output Voltage(at no load within the input range) V2:fixed with tolerance of +/-3.5%(at no load within the input range)							
Ripple and Noise [mVp-p](maximum) *3	290	100	170	170	200	200	290	100
Regulation								
Statistic Line Regulation [mV](maximum)	120	25	60	60	75	75	120	25
Statistic Load Regulation [mV](maximum)	240	50	120	120	150	150	240	50
Temperature Coefficient *4	0.03%/°C							
Drift[mV](maximum) *5	135	40	75	75	90	90	135	40
Dynamic Load Regulation [mV](typical) *6	not specified							
Recovery Time *6	not specified							
Rise up time	200mS(maximum) at 25°C and rated input/output							
Hold up time	20mS(minimum) at 25°C and rated input/output							
Functions								
Overcurrent Protection $\geq 105\%$ of Rated Output Current[A]	V1:Current Limiting with automatic recovery V2:by the regulator I.C's characteristics							
	\geq Peak	-	\geq Peak	-	1.89	-	\geq Peak	-
Overvoltage Protection $\geq 112\%$ of Rated Output Voltage[V]	V1:output shutdown(to reset,leave 30seconds after shut-off) V2:not available							
	26.9	-	13.4	-	16.8	-	26.9	-
Remote Sense	not available							
Remote On/Off	not available							
Environmental								
Operating Temperature	-5 to +50°C[enclosed type:-5 to 50°C at vertical mount/-5 to 40°C at horizontal mount]							
Operating Humidity	85%RH(non-condensing)							
Storage Temperature	-20 to +85°C							
Storage Humidity	85%RH(non-condensing)							
Withstanding Voltage	Primary-Secondary AC2,500V for 1minute Primary-Frame Ground AC2,500V for 1minute Secondary-Frame Ground AC500V for 1minute							
Isolation Resistance	Primary-Secondary-Frame Ground 50MΩ(minimum) by DC500V insulation tester							
Vibration	5-10Hz:10mm double amplitude,10-55Hz:19.6m/s ² ,20minutes' period for 60minutes each along X,Y,Z axes(non-operating)							
Shock	294m/s ²							
Cooling	Convection							
? Leakage Current	1mA(maximum) at 25°C,rated input/output and rated input frequency							
? Line conducted noise	Built to meet FCC Part15-B Class B							
? Safety								
Weight (typical)	400g/enclosed type:450g							
? MTBF [H]	520,000							
? Switching Frequency[kHz](typical) *7	30	30	40	40	40	40	40	40

Conditions:

*1 at cold start

*2 at DC260V input and rated output

*3 measured by a bayonet probe at output connector at 0 to 100MHz bandwidth

*4 at -5 to +50°C/enclosed type: at -5 to +40°C

*5 for 7hour period after 1hour warm-up at 25°C and rated input/output

*6 when output current changed from 25% to 75% of rated output current rapidly at AC200V input

*7 variable on input voltage and load conditions




ETA-USA


HIGH QUALITY SWITCHING POWER SUPPLIES

ETA-USA Tel: 408-778-2793 Fax: 408-779-2753 e-mail: sales@eta-usa.com

Block Diagram

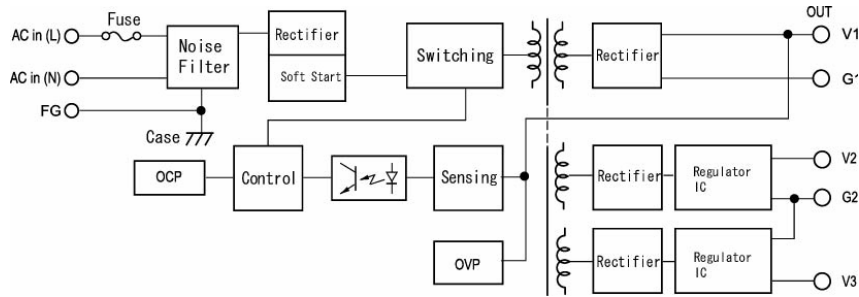

Efficiency Curve

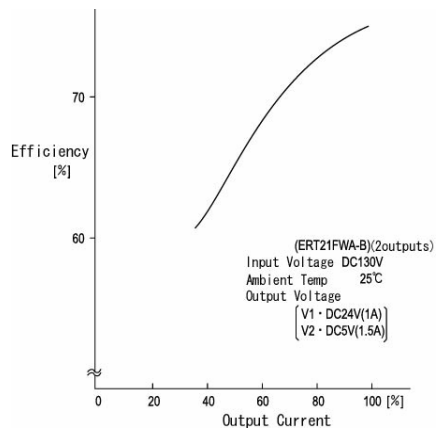

OCP Curve

