

**Power Choke Coil HTEK20161T MSR type**


**■ Features**

High performance (Isat) realized by metal dust core.  
 Low profile : 2.0mm x 1.6mm x 1.0mm  
 Low loss realized with low DCR  
 100% lead (Pb) free meet RoHS standard

**■ Application**

DC/DC converter for CPU in Notebook PC  
 Cellular phones, LCD displays, HDDs, DVCs, DSCs, PDAs etc..  
 Thin type on-board power supply module for exchanger  
 VRM for server

**■ Outline Dimensions**

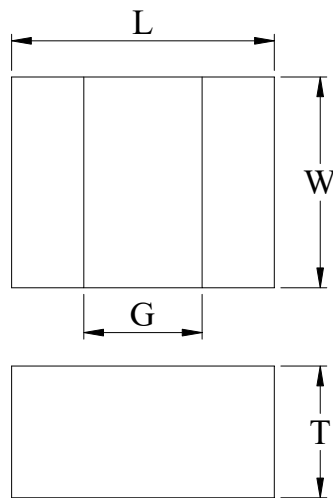


Code	Dimensions
L	2.0 ± 0.2
W	1.6 ± 0.2
T	1.0 Max.
G	0.6Typ.

Unit : mm

**■ Recommend Land Pattern Dimensions**

The customer shall determine the land dimensions shown below after confirming and safety.

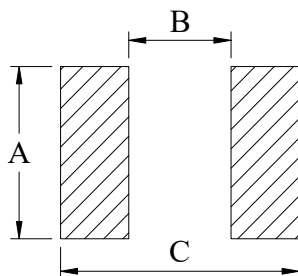


A	1.7
B	0.5
C	2.1

Unit : mm

**■ Marking**

The point on the top surface represents winding direction of choke.

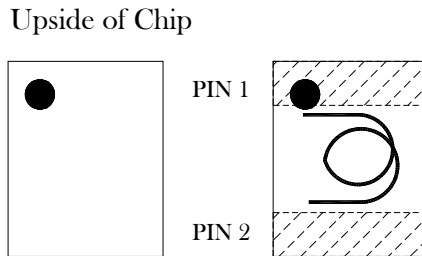

Coil clockwise around

**■ Specifications**

Part Number	L0 Inductance ( $\mu\text{H}$ ) @ (0A)	$R_{dc}$ ( $\text{m}\Omega$ )		Heat Rating Current DC Amps. $I_{dc}$ ( A )		Saturation Current DC Amps. $I_{sat}$ ( A )	
		Typical	Maximum	Typical	Maximum	Typical	Maximum
HTEK20161T-1R0MSR	1.0	35	43	4.5	4.1	4.6	4.2

\* : If you require another part number please contact with us.

\*\* : Inductance Tolerance  $\pm 20\%$

Note 1. : All test data is referenced to 25°C ambient.

Note 2. : Test Condition:1MHz, 1.0Vrms

Note 3. :  $I_{dc}$  : DC current (A) that will cause an approximate  $\Delta T$  of 40°C

Note 4. :  $I_{sat}$  : DC current (A) that will cause L0 to drop approximately 30%

Note 5. : Operating Temperature Range -55°C to + 125°C

Note 6. : The part temperature (ambient + temp rise) should not exceed 125°C under the worst case operating conditions. Circuit design , component placement, PCB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.

Note 7. : The rated current as listed is either the saturation current or the heating current depending on which value is lower.

■ Current Characteristic

