PASTERNACK®
THE ENGINEER'S RF SOURCE



75 Watts High Power WR-28 Waveguide Load 26.5 GHz to 40 GHz

Waveguide Terminations Technical Data Sheet PE6200

Features

- WR-28
- 26.5 to 40 GHz
- 1.20:1 Maximum VSWR
- 75 Watts Average Power Handling (CW)

Applications

- Instrumentation
- Precision Measurements
- Prototyping and Characterization
- Production Systems

Description

Pasternack's PE6200 is part of our line of waveguide terminations (or waveguide loads) which are in stock and available to ship same-day. Waveguide loads are designed to absorb virtually all applied power, ensuring a low VSWR. Our PE6200 offers excellent VSWR of 1.20:1 maximum. This WR-28 waveguide termination uses a square cover flange and offers CW power handling of up to 75 Watts.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	26.5		40	GHz
VSWR		1.1:1	1.2:1	
Input Power (CW)			75	Watts
Input Power (Peak)			50	KWatts

Mechanical Specifications

Size

Length	4 in [101.6 mm]
Width/Dia.	1.5 in [38.1 mm]
Height	0.9 in [22.86 mm]
Weight	0.735 lbs [333.39 g]

Description	Flange	Waveguide
Designation	None	WR-28
Type	Square Cover	
Material	Aluminum	Aluminum

Environmental Specifications

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 75 Watts High Power WR-28 Waveguide Load 26.5 GHz to 40 GHz PE6200

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2016 Pasternack Enterprises All Rights Reserved

PASTERNACK®
THE ENGINEER'S RF SOURCE



75 Watts High Power WR-28 Waveguide Load 26.5 GHz to 40 GHz

Waveguide Terminations Technical Data Sheet PE6200

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

75 Watts High Power WR-28 Waveguide Load 26.5 GHz to 40 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 75 Watts High Power WR-28 Waveguide Load 26.5 GHz to 40 GHz PE6200

URL: https://www.pasternack.com/75-watts-wr-28-rf-load-26.5-40-ghz-pe6200-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2016 Pasternack Enterprises All Rights Reserved

PE6200 CAD Drawing

75 Watts High Power WR-28 Waveguide Load 26.5 GHz to 40 GHz

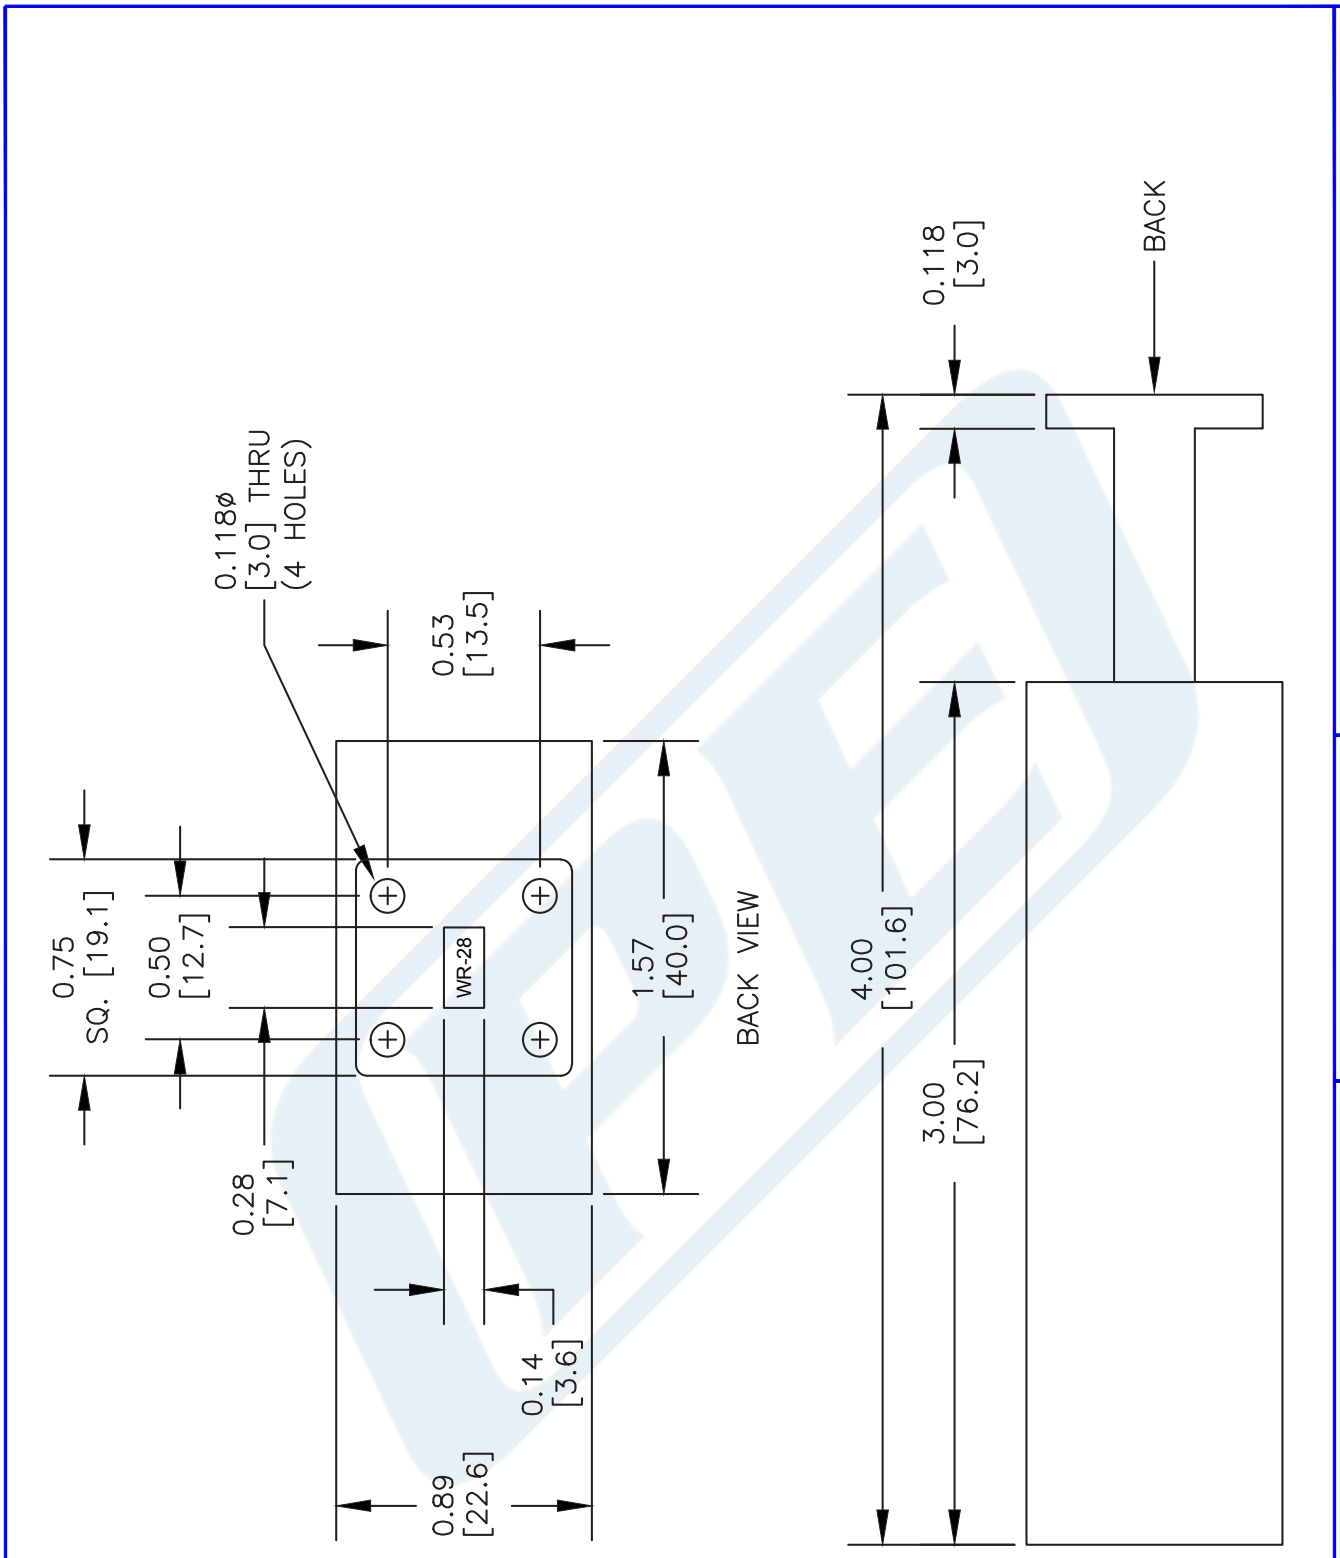

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE	062113	SCALE N/A	SIZE A	2233

DWG TITLE **PE6200**

FSCM NO. 53919

PASTERNACK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

© 2016 Pasternack Enterprises All Rights Reserved