Elektronische Bauelemente

SBR30150RF


Voltage 150 V
30 Amp Schottky Barrier Rectifiers

RoHS Compliant Product
A suffix of "-C" specifies halogen free


FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

ITO-220

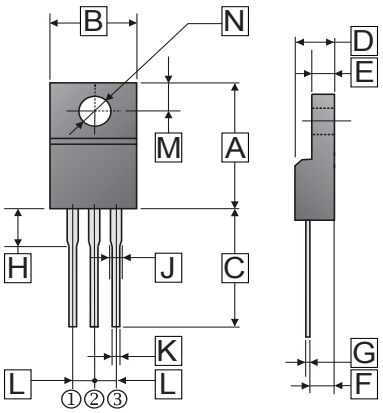

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	14.60	15.60	H	3.00	3.80
B	9.50	10.50	J	0.90	1.50
C	12.60	13.70	K	0.50	0.90
D	4.30	4.70	L	2.34	2.74
E	2.50	3.2	M	2.40	2.90
F	2.40	2.80	N	ϕ3.0	ϕ3.4
G	0.30	0.70			



MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 2.24 grams (approximate)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load. For capacitive load, de-rate current by 20%.

Parameter		Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage		V_{RRM}	150	V
Working Peak Reverse Voltage		V_{RSM}	150	V
Maximum DC Blocking Voltage		V_{DC}	150	V
Maximum Average Forward Rectified Current	Per Leg	I_F	15	A
	Per Device		30	
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)		I_{FSM}	180	A
Maximum Instantaneous Forward Voltage	I_F = 15 A, T_A = 25°C, per leg	V_F	0.88	V
	I_F = 15 A, T_A = 125°C, per leg		0.76	
Maximum DC Reverse Current at Rated DC Blocking Voltage [3]	T_A = 25°C	I_R	0.2	mA
	T_A = 125°C		5	
Typical Junction Capacitance [1]		C_J	350	pF
Typical Thermal Resistance [2]		$R_{\theta JC}$	4	°C /W
Voltage Rate Of Chance (Rated V_R)		dv / dt	10000	V / µs
Operating Temperature Range T_J		T_J	-50 ~ +150	°C
Storage Temperature Range T_{STG}		T_{STG}	-65 ~ +175	°C

Notes:
1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Thermal Resistance Junction to Case.
3. Pulse test: 300µS pulse width, 2% duty cycle.

Elektronische Bauelemente


SBR30150RF

Voltage 150 V


30 Amp Schottky Barrier Rectifiers

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

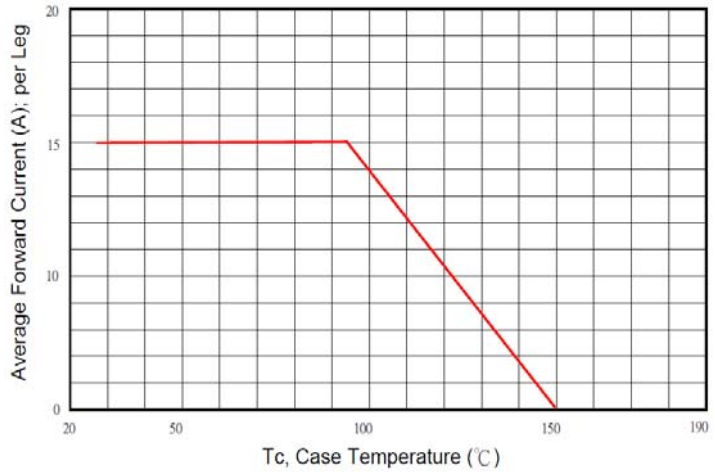


Typical Forward Characteristic

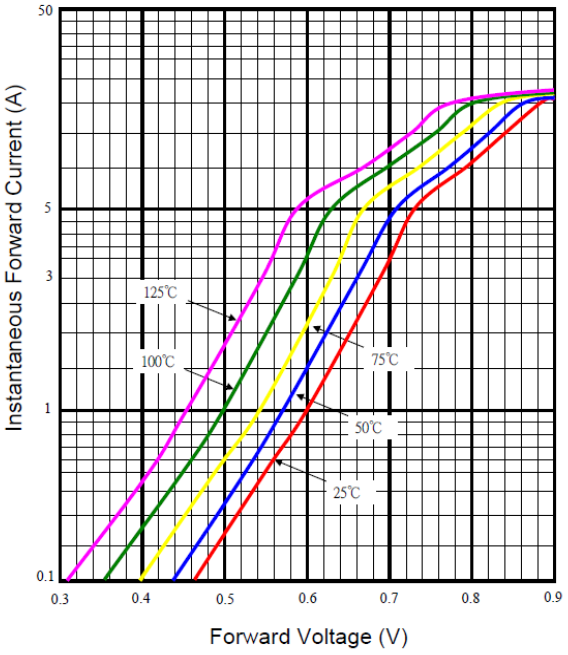

Typical Junction Capacitance

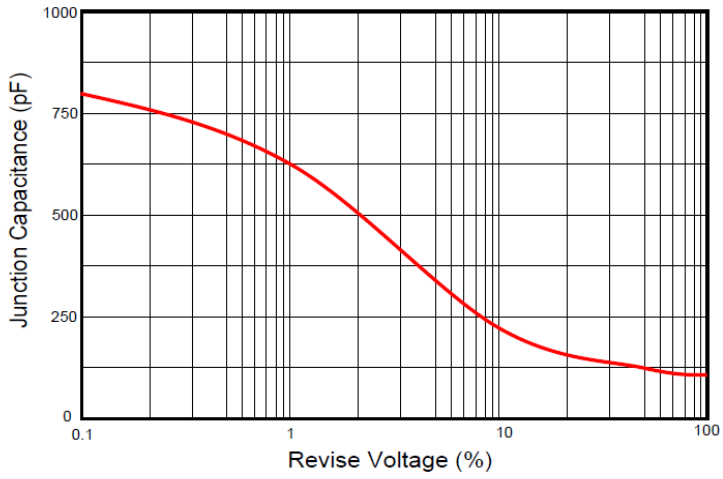

Typical Reverse Characteristic

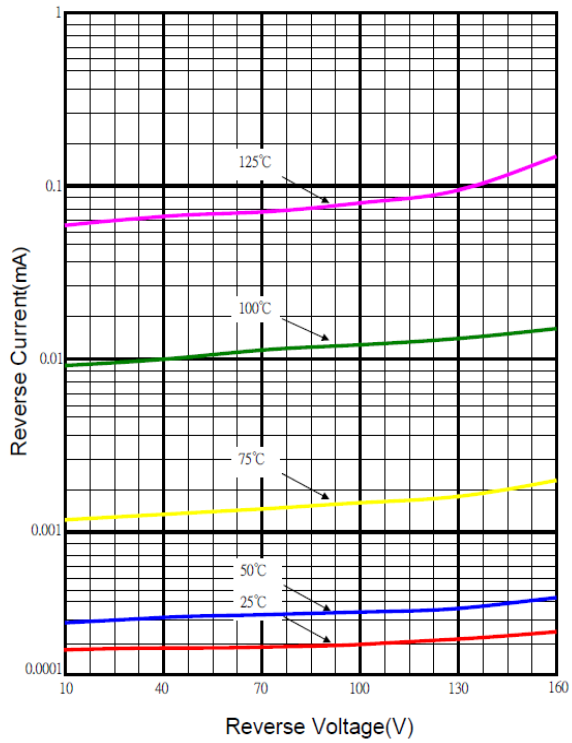

Maximum Non- Repetitive Forward Surge Current

