
MATERIALS	
BODY	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE

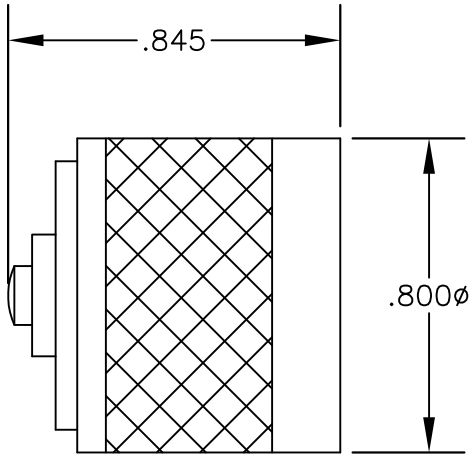

SPECIFICATIONS

IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC TO 1 GHz
POWER HANDLING CAPABILITY: 2 WATTS
MAXIMUM VSWR: 1.05

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

COAXIAL & FIBER OPTICS

DWG TITLE	DES.
PE6152	N MALE TERMINATION

REV. A	FSCM NO. 53919	CAD FILE 052010	SCALE N/A	SIZE A	127

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.