Mallory Sonalert Products,Inc.

Part #: **SBT200FL**

Sales Outline Drawing

Revision: **C**

Specifications:	cUL Recognized as Capable of meeting Medical Spec IEC60601-1-8
Capacitance (pF):	70,000 ± 30% at 120 Hz
Rated Voltage (Vp-p):	5, 30 Max
Current Draw:	1.5 mA at rated voltage
Recommended Drive	200 Hz
Loudness @ 10 CM:	85 to 95 dB(A) Typ.
Harmonics Present:	Minimum of 4 peaks within ±15dB from 1-4kHz
Housing Material:	ABS 777D Plastic Resin, Black
Lead Pin:	Tin Plated Brass
Storage Temperature:	-40° to +85° C
Operating Temperature:	-30° to +65° C
Weight (Typical):	0.56 oz (16g)
Options:	Please contact factory.

Dimensions: Inches [mm]


cUL Recognized

PATENT NUMBER: 7880593

ROHS Compliant

Before Code Date: 1546 Not cUL Recognized

After Code Date: 1547 cUL Recognized

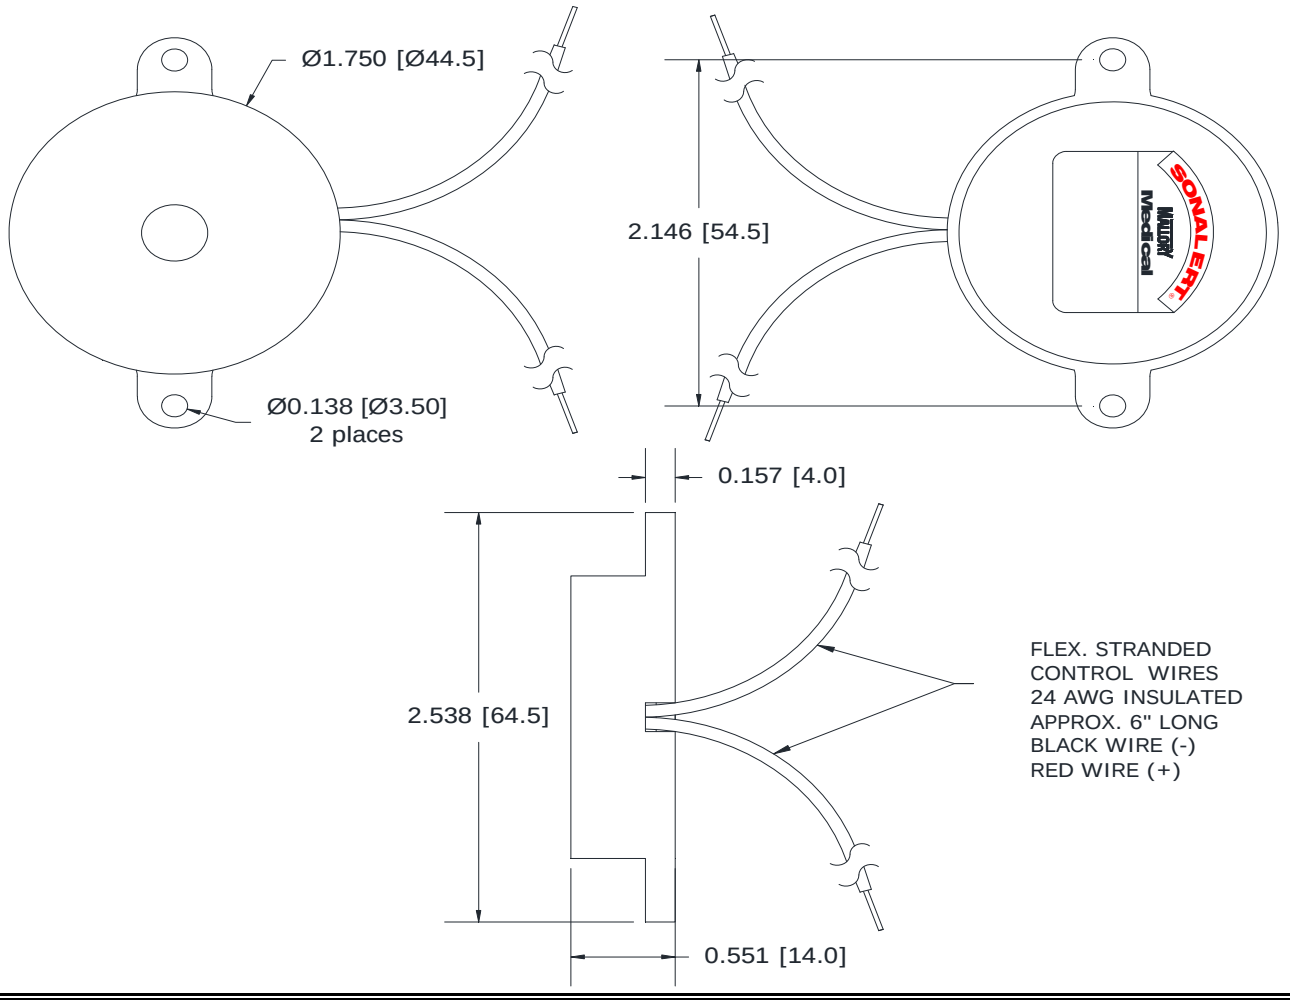

FLEX. STRANDED
CONTROL WIRES
24 AWG INSULATED
APPROX. 6" LONG
BLACK WIRE (-)
RED WIRE (+)

4411 South High School Road, Indianapolis, Indiana 46241 U.S.A · Phone: (317) 612-1000 Fax: (317) 612-1010 www.mallory-sonalert.com