

General Description

The SDP339 series is consisted by four independent precision voltage comparators. The input common mode voltage range of these comparators includes ground, even when operated from a single power supply voltage. The SDP339 series is designed to directly interface with TTL and CMOS. It can be widely used in such applications as battery charger, cordless telephone, switching power supply, DC-DC module and PC motherboard.

The SDP339 series are available in 2 Packages: DIP-14 and SOP-14.

Features

- Wide Supply Voltage Range
Single Supply: 2.0V to 18V
Dual Supplies: $\pm 1.0\text{V}$ to $\pm 9\text{V}$
- Very Low Supply Current Drain: 0.45mA(Typical)
- Low Input Bias Current: 25nA (Typical)
- Low Input Offset Current: $\pm 5\text{nA}$ (Typical)
- Low Input Offset Voltage: $\pm 2\text{mV}$ (Typical)
- Input Common Mode Voltage Range Includes Ground
- Differential Input Voltage Range Equals to the Power Supply Voltage
- Low Output Saturation Voltage: 100mV at 4mA

Applications

- Battery Charger
- Cordless Telephone
- Switching Power Supply
- DC-DC Module
- PC Motherboard
- Communication Equipment

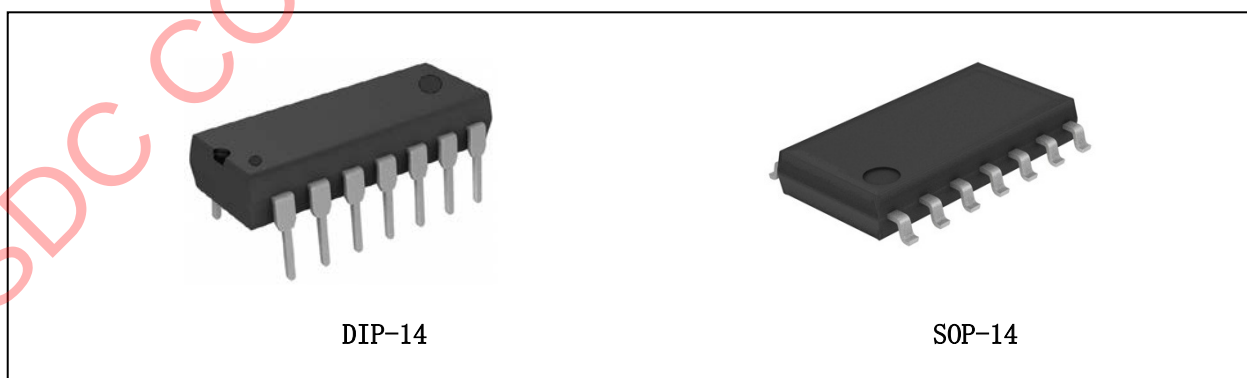


Figure 1. Package Type

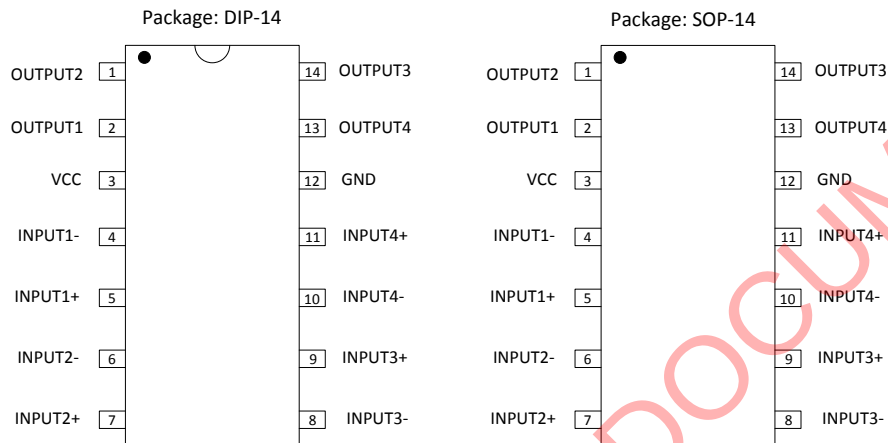
Pin Configuration


Figure 2. Pin Configuration

Pin Number	Pin Name	Function
1, 2, 13, 14	OUT	Output pins of Comparator
4, 6, 8, 10	INPUT-	Input- pins of Comparator
5, 7, 9, 11	INPUT+	Input+ pins of Comparator
3	VCC	VCC of Comparator
12	GND	GND of Comparator

Table1. Pin Description

Functional Block Diagram

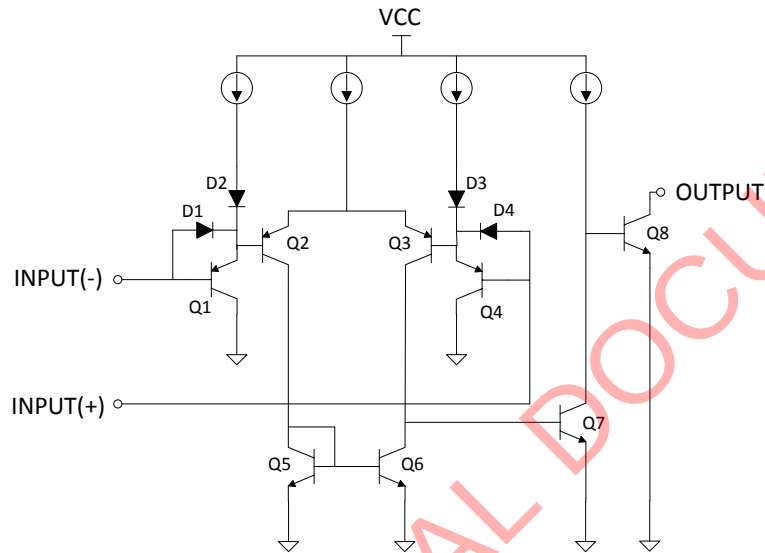
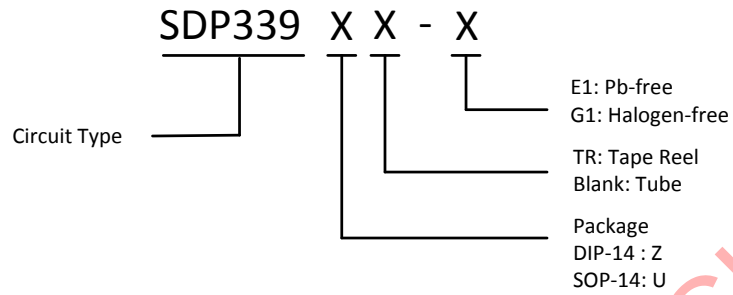


Figure 4. Functional Block Diagram

LOW POWER LOW OFFSET VOLTAGE QUAD COMPARATORS
SDP339
Ordering Information


Package	Temperature Range	Part Number		Marking ID		Packing Type
		Pb-free	Halogen-free	Pb-free	Halogen-free	
SOP-14	-40°C ~85°C	SDP339UTR-E1	SDP339UTR-G1	SDP339	SDP339G	Tape Reel
DIP-14		SDP339Z-E1	SDP339Z-G1	SDP339	SDP339G	Tube

Absolute Maximum Ratings (Note: Stresses greater than those listed under absolute maximum ratings may cause permanent damage to the device.)

Parameter	Symbol	Value	Unit
Supply Voltage	V_{CC}	20	V
Differential Input Voltage	V_{ID}	20	V
Input Voltage	V_{IN}	-0.3~ 20	V
Input Current	I_{IN}	50	mA
Output Short Circuit to Ground		Continuous	
Power Dissipation ($T_a=25^{\circ}\text{C}$)	P_D	DIP-14	1050
		SOP-14	830
Operating Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-65~150	$^{\circ}\text{C}$
Latch-up test per JEDEC 78	-	200	mA

Table 2. Absolute Maximum Ratings

Recommended Operating Conditions

Parameter	Symbol	Min	Max	Unit
Power supply	V_{CC}	2	18	V
Operation temperature	T_A	-40	85	$^{\circ}\text{C}$

Table 3 Recommended Operating Conditions

Electrical Characteristics (Ta=25°C, V_{CC}=5V, unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input Offset Voltage	V _{IO}	V _{OUT} =1.4V, R _S :0Ω	-	2.0	5.0	mV
Input Bias Current	I _B	I _{IN+} or I _{IN-} with output in Linear Range, I _B =(I _{IN+} + I _{IN-})/2, V _{CM} =0V	-	25	250	nA
Input Offset Current	I _{IO}	I _{IN+} - I _{IN-} , V _{CM} =0V	-	5.0	50	nA
Input Common Mode Voltage Range	V _{ICM}	V _{CC} =18V	0	-	V _{CC} -1.5	V
Supply Current	I _{CC}	R _L =∞				
		V _{CC} =5V	-	0.45	0.8	mA
		V _{CC} =18V	-	0.55	1.0	
Voltage Gain	GV	R _L ≥15kΩ, V _{CC} =18V, V _{OUT} =1V to 11V	50	200	-	V/mV
Large Signal Response Time	T _{RES}	V _{IN} =TTL Logic swing, V _{REF} =1.4V, V _{RL} =5V, R _L =5.1kΩ	-	170	-	ns
Response Time	T _{RES}	V _{RL} =5V, R _L =5.1kΩ		0.6	-	us
Output Sink Current	I _{SINK}	V _{IN-} =1V, V _{IN+} =0, V _{OUT} =1.5V	8	20	-	mA
Saturation Voltage	V _{SAT}	V _{IN-} =1V, V _{IN+} =0, I _{SINK} ≤ 4mA	-	100	200	mV
Output Leakage Current	I _{LEAK}	V _{IN-} =0V, V _{IN+} =1V, V _{OUT} =5V	-	0.1	1	nA

Table 4. Electrical Characteristics

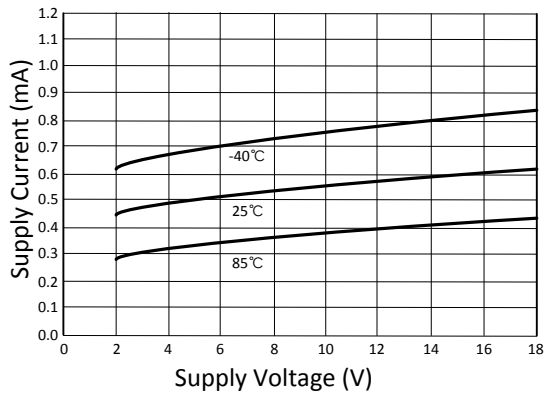
Typical Performance Characteristics


Figure 4. Supply Voltage vs. Supply Current

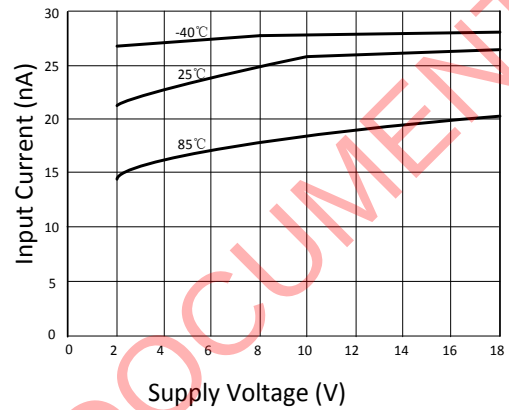


Figure 5. Supply Voltage vs. Input Current

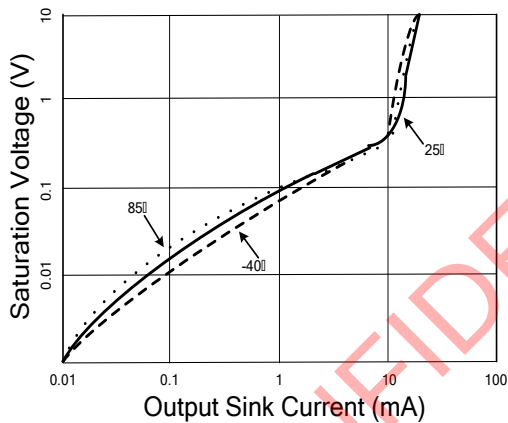


Figure 6. Output Sink Current vs. Saturation Voltage

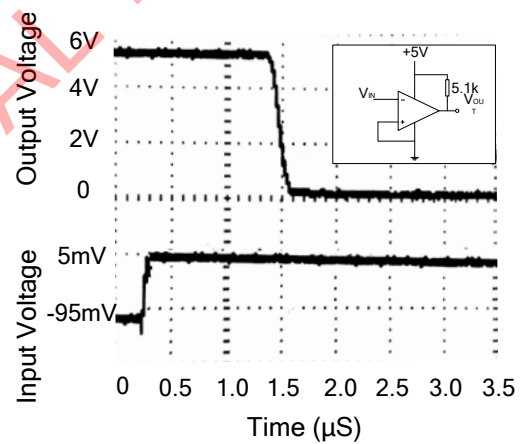


Figure 7. Response Time for 5mV Input Overdrive - Negative Transition

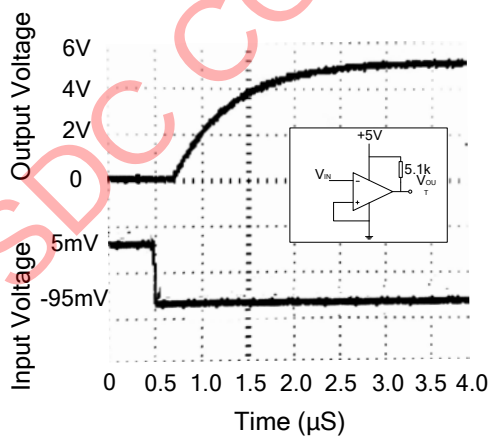


Figure 8. Response Time for 5mV Input Overdrive - Positive Transition

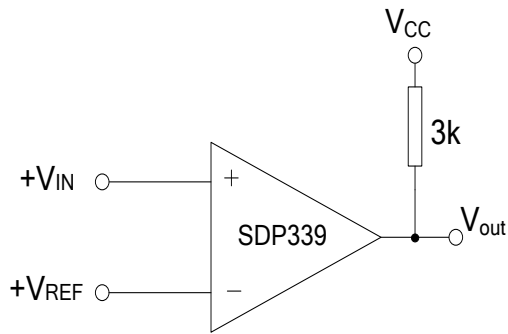
Typical Applications


Figure 9. Basic Comparator

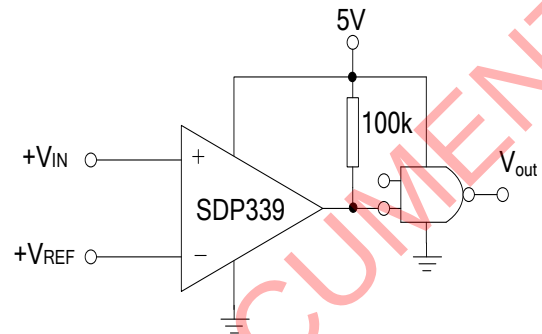


Figure 10. Driving CMOS/TTL

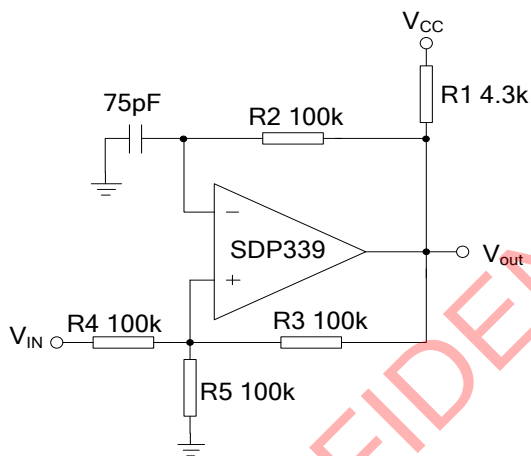


Figure 11. Square wave Oscillator

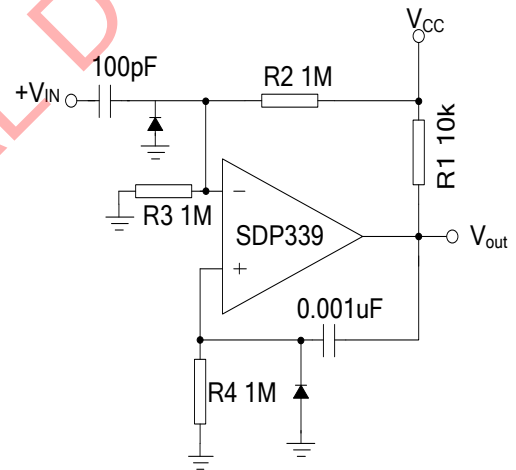
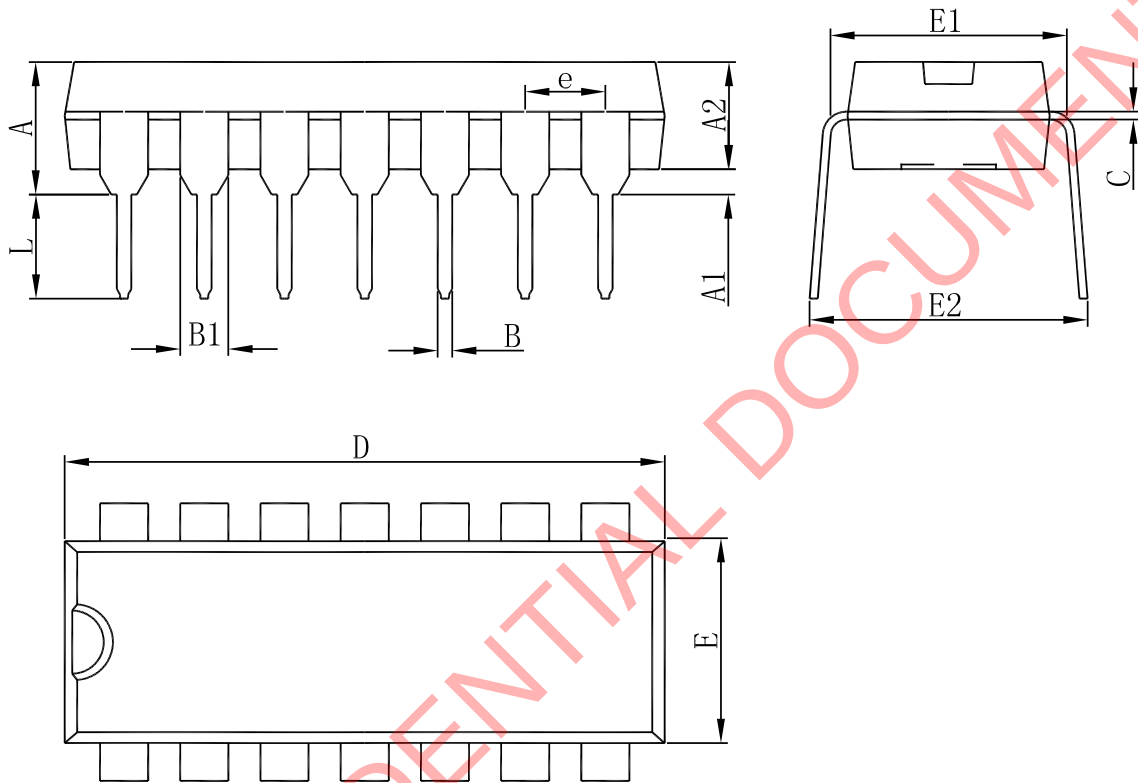
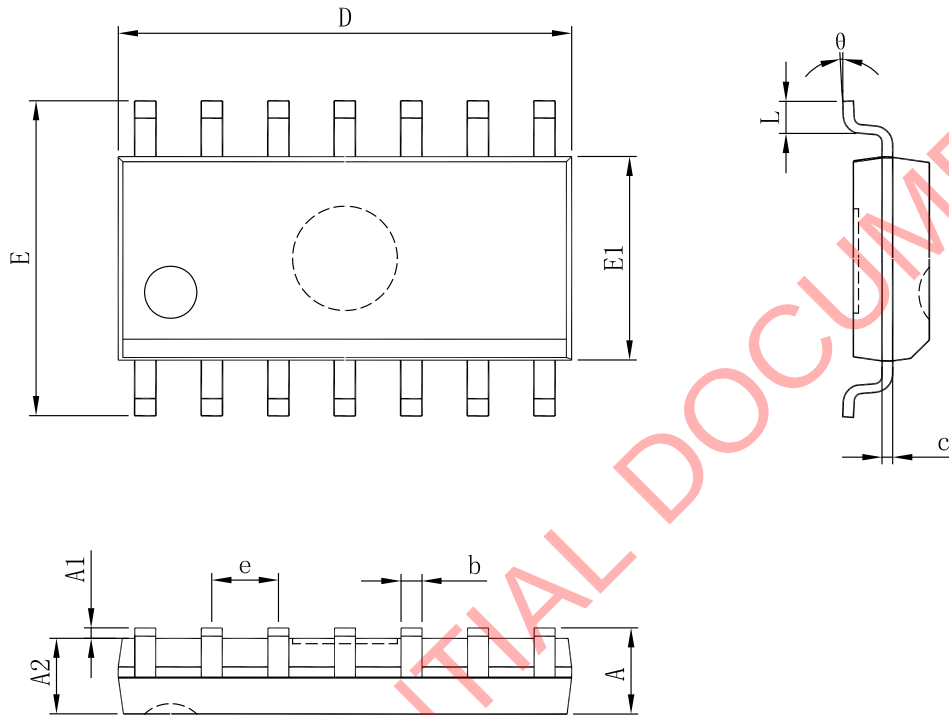


Figure 12. One Shot Multivibrator

Package Dimensions
DIP-14


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.710	4.310	0.146	0.170
A1	0.510	—	0.020	—
A2	3.200	3.600	0.126	0.142
B	0.380	0.570	0.015	0.022
B1	1.524 (BSC)		0.060 (BSC)	
C	0.204	0.360	0.008	0.014
D	18.800	19.200	0.740	0.756
E	6.200	6.600	0.244	0.260
E1	7.320	7.920	0.288	0.312
e	2.540 (BSC)		0.100 (BSC)	
L	3.000	3.600	0.118	0.142
E2	8.400	9.000	0.331	0.354

SOP-14


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	—	1.750	—	0.069
A1	0.100	0.250	0.004	0.010
A2	1.250	—	0.049	—
b	0.310	0.510	0.012	0.020
c	0.100	0.250	0.004	0.010
D	8.450	8.850	0.333	0.348
e	1.270 (BSC)		0.050 (BSC)	
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°



Shaoxing Devechip Microelectronics Co., Ltd.

<http://www.sdc-semi.com/>

IMPORTANT NOTICE

Information in this document is provided solely in connection with Shaoxing Devechip Microelectronics Co., Ltd. (abbr. SDC) products. SDC reserves the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at anytime, without notice. SDC does not assume any responsibility for use of any its products for any particular purpose, nor does SDC assume any liability arising out of the application or use of any its products or circuits. SDC does not convey any license under its patent rights or other rights nor the rights of others.

© 2013 Devechip Microelectronics - All rights reserved

Contact us:

Headquarters of Shaoxing

Address: Tian Mu Road, No13,

Shaoxing city, Zhejiang province, China

Zip code: 312000

Tel: (86) 0575-8861 6750

Fax: (86) 0575-8862 2882

Shenzhen Branch

Address: 22A, Shangbu building, Nan Yuan Road, No.68,

Futian District, Shenzhen city, Guangdong province, China

Zip code: 518031

Tel: (86) 0755-8366 1155

Fax: (86) 0755-8301 8528