


SMT Power Inductor

HMU1356H Type


Features

- RoHS compliant.
- Low profile, SMD type.
- High current.
- Magnetic shielded.
- High energy storage and low DCR.
- Provided with embossed carrier tape packing.
- Ideal for power source circuits, DC-DC converter, DC-AC inverters inductor applications.
- In addition to the standard versions shown here, customized inductors are available to meet your exact requirements.



Mechanical Dimension :

RECOMMENDED PAD PATTERNS

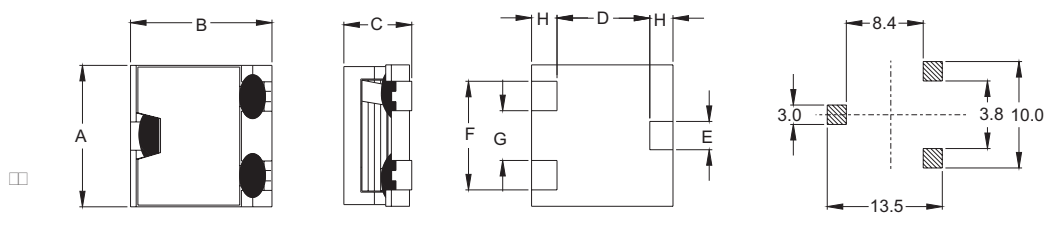

UNIT : mm/inch
 A = 12.60±0.4 / 0.496±0.016
 B = 12.70±0.3 / 0.500±0.012
 C = 5.60 / 0.220 Max.
 D = 8.95 / 0.352
 E = 2.50 / 0.098
 F = 9.50 / 0.374
 G = 4.30 / 0.169
 H = 1.90 / 0.075

Electrical Characteristics : 25°C, 100KHz, 1V

PART NO.	L ¹ (μH)	DCR (mΩ) MAX	I _{sat} ² (Adc)	I _{rms} ³ (Adc)
HMU1356H-R35	0.35	1.5	35.0	19.5
HMU1356H-0R8	0.80	2.2	25.7	18.0
HMU1356H-1R4	1.40	3.4	19.2	15.5
HMU1356H-2R2	2.20	5.4	14.8	12.5
HMU1356H-3R2	3.20	8.0	12.8	9.9
HMU1356H-4R3	4.30	11.4	11.0	8.2
HMU1356H-5R6	5.60	13.5	9.5	7.6

1. Tolerance of inductance is ±20%.
2. I_{sat} is the DC current which cause the inductance drop approximately 20% of is nominal inductance without current.
3. I_{rms} is the DC current which cause the surface temperature of the part increase less than 45°C.
4. Operating temperature : -20°C to 105°C (including self-temperature rise).



DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 252, SAN YING ROAD, KUEISAN INDUSTRIAL ZONE, TAOYUAN SHIEN, 333, TAIWAN, R.O.C.
 TEL: 886-3-3591968; FAX: 886-3-3591991
<http://www.deltaww.com>