
SSF2816EB

20V Dual N-Channel MOSFET

DESCRIPTION

The SSF2816EB uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as 0.75V.



Schematic Diagram



Marking and Pin Assignment



TSSOP-8 Top View

GENERAL FEATURES

- V_{DS} = 20V,I_D = 7A
  $R_{DS(ON)}$ < 30mΩ @ V_{GS}=2.5V
  $R_{DS(ON)}$ < 26mΩ @ V_{GS}=3.1V
  $R_{DS(ON)}$ < 23mΩ @ V_{GS}=4V
  $R_{DS(ON)}$ < 22mΩ @ V_{GS}=4.5V

  ESD Rating：2500V HBM

- High Power and current handling capability
- Lead free product
- Surface Mount Package

APPLICATIONS

- Battery protection
- Load switch
- Power management

PACKAGE MARKING AND ORDERING INFORMATION

Device Marking	Device	Device Package	Reel Size	Tape Width	Quantity
SSF2816EB	SSF2816EB	TSSOP-8	Ø330mm	12mm	3000 units

ABSOLUTE MAXIMUM RATINGS (T_A=25℃unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	±12	V
Drain Current-Continuous@ Current-Pulsed (Note 1)	I_D	7	A
	I_{DM}	25	A
Maximum Power Dissipation	P_D	1.5	W
Operating Junction and Storage Temperature Range	T_J,T_{STG}	-55 To 150	℃

THERMAL CHARACTERISTICS

Thermal Resistance,Junction-to-Ambient (Note 2)	$R_{\theta JA}$	83	℃/W

ELECTRICAL CHARACTERISTICS (T_A=25℃unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V I_D=250μA	20			V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}=20V,V_{GS}=0V			1	μA
Gate-Body Leakage Current	I_{GSS}	V_{GS}=±4.5V,V_{DS}=0V			±200	nA
		V_{GS}=±10V,V_{DS}=0V			±10	uA
ON CHARACTERISTICS (Note 3)						
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS}=V_{GS},I_D=250μA	0.6	0.75	1.2	V
Drain-Source On-State Resistance	$R_{DS(ON)}$	V_{GS}=4.5V, I_D=6.5A		16.5	22	mΩ
		V_{GS}=4V, I_D=6A		17	23	mΩ
		V_{GS}=3.1V, I_D=5.5A		19	26	mΩ
		V_{GS}=2.5V, I_D=5.5A		22	30	mΩ
Forward Transconductance	g_{FS}	V_{DS}=10V,I_D=6.5A		6.6		S
DYNAMIC CHARACTERISTICS (Note4)						
Input Capacitance	C_{lss}	V_{DS}=8V,V_{GS}=0V, F=1.0MHz		600		PF
Output Capacitance	C_{oss}			330		PF
Reverse Transfer Capacitance	C_{rss}			140		PF
SWITCHING CHARACTERISTICS (Note 4)						
Turn-on Delay Time	$t_{d(on)}$	V_{DD}=10V,I_D=1A V_{GS}=4.5V,R_{GEN}=6Ω		10	20	nS
Turn-on Rise Time	t_r			11	25	nS
Turn-Off Delay Time	$t_{d(off)}$			35	70	nS
Turn-Off Fall Time	t_f			30	60	nS
Total Gate Charge	Q_g	V_{DS}=10V,I_D=7A, V_{GS}=4.5V		10	15	nC
Gate-Source Charge	Q_{gs}			2.3		nC
Gate-Drain Charge	Q_{gd}			3		nC
DRAIN-SOURCE DIODE CHARACTERISTICS						
Diode Forward Voltage (Note 3)	V_{SD}	V_{GS}=0V,I_S=1.5A		0.84	1.2	V

NOTES:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, t ≤ 10 sec.
3. Pulse Test: Pulse Width ≤ 300μs, Duty Cycle ≤ 2%.
4. Guaranteed by design, not subject to production testing.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

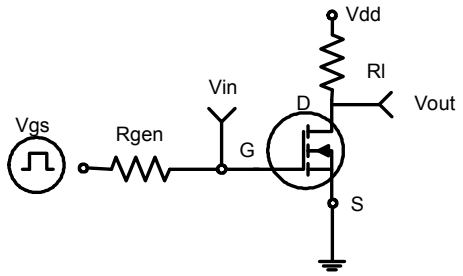


Figure 1:Switching Test Circuit

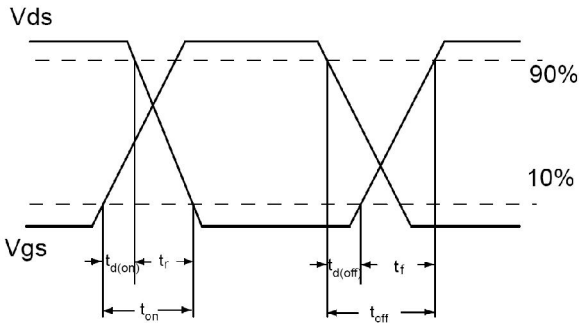


Figure 2:Switching Waveform


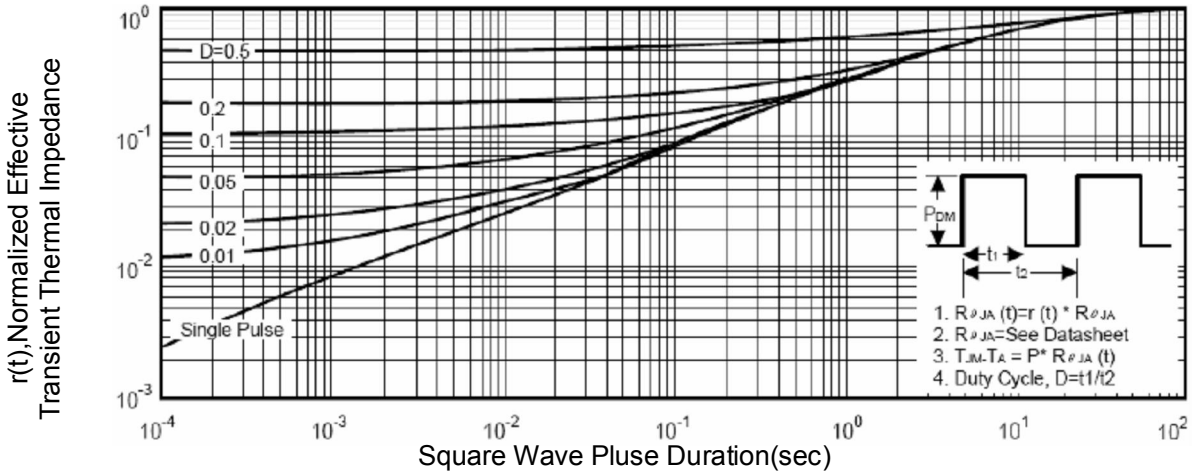


Figure 3 Normalized Maximum Transient Thermal Impedance

TSSOP-8 PACKAGE INFORMATION

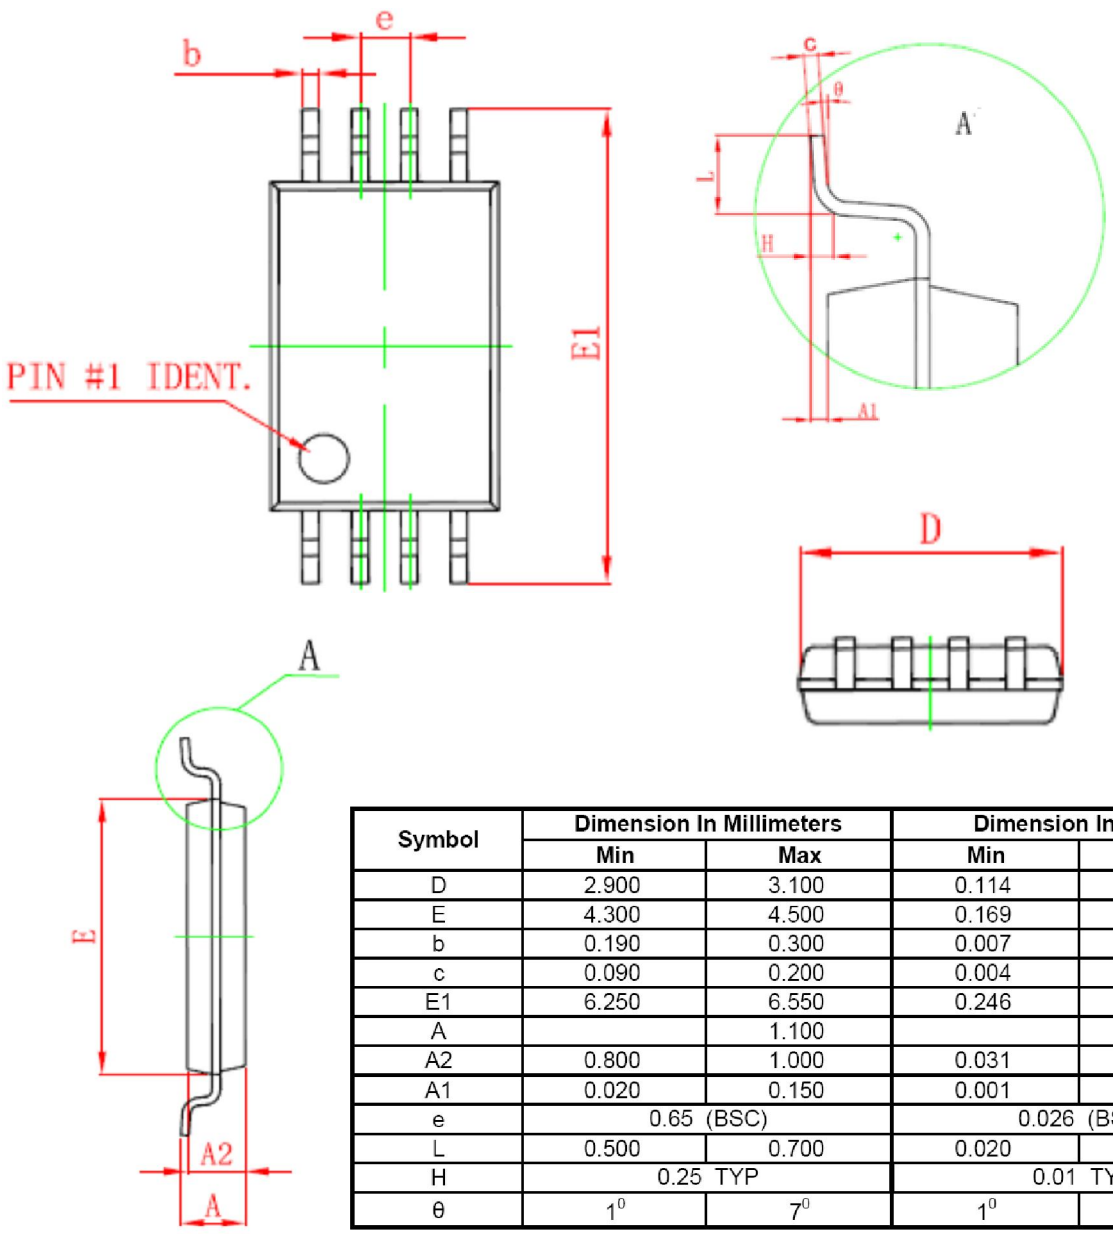

Symbol	Dimension In Millimeters		Dimension In Inches	
	Min	Max	Min	Max
D	2.900	3.100	0.114	0.122
E	4.300	4.500	0.169	0.177
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
E1	6.250	6.550	0.246	0.258
A		1.100		0.043
A2	0.800	1.000	0.031	0.039
A1	0.020	0.150	0.001	0.006
e	0.65 (BSC)		0.026 (BSC)	
L	0.500	0.700	0.020	0.028
H	0.25 TYP		0.01 TYP	
θ	1^0	7^0	1^0	7^0

NOTES:

1. Dimensions are inclusive of plating
2. Package body sizes exclude mold flash and gate burrs. Mold flash at the non-lead sides should be less than 6 mils.
3. Dimension L is measured in gauge plane.
4. Controlling dimension is millimeter, converted inch dimensions are not necessarily exact.