

F-361U

Electrical Specifications (@25C)

1. Maximum Power: 108 VA Max
2. Primary: 115/230V @ 50/60 Hz
3. Secondaries: 0-24/27/30/33/36V @ 3 Amps

Description:

The F-361U is a chassis mount power transformer that was designed with multiple secondaries to give the user maximum flexibility.

Safety:

These products are 100% hi-pot tested with an insulation of 1500V between primary and secondary windings as well as between the primary / secondary windings and the core.

Dimensions:

Units: inches

H	W	D	MW	MD
3.75	3.125	3.25	2.50	2.625

Weight: 5.65 lbs


Connections:

Primary – 22AWG, UL 1015, 7.0" ± 1.0", Skin & Tin: ¼" ± 1/16"

Secondary - 18AWG, UL 1015, 7.0" ± 1.0", Skin & Tin: ¼" ± 1/16"

For Input (115V): BLK and RED/BLK to YEL/BLK and BLK/GRN





For Input (230V): BLK to BLK GRN, Tie YEL/BLK to RED/BLK

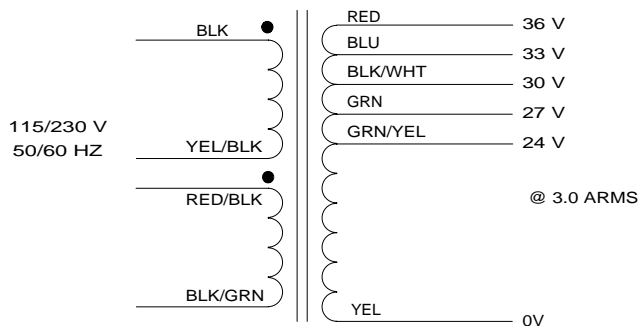

Technical note: Primary windings are designed to be connected in series or parallel.

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

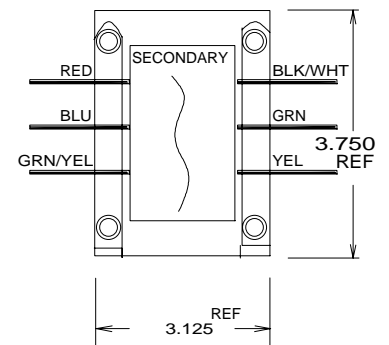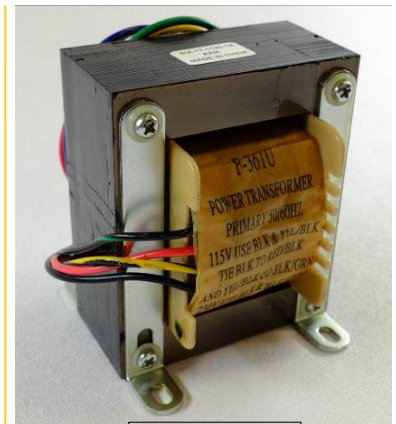

460 Harley Knox Blvd.
Perris, California 92571 Web:
www.TriadMagnetics.com
Phone 951-277-0757
Fax 951-277-2757

460 Harley Knox Blvd.
Perris, California 92571

Publish Date: December 4, 2013