

HSF

NOTES:
 Rated Current: 3.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40℃ to +105℃
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK

A3

Ordering Information


1125-11 XX XX S XXX C X XX A4

No. of Pins	Contact Plating	Pin Length	Insulator Material	Packing	Series No.
02-40	G0=Gold Flash	L=A+B+2.5	C=PA9T	0=PE Bag	01-99
	G3=10u"Gold	Standard:085=8.5		T=Tube	
	G4=15u"Gold	095=9.5		P=Tube+CAP	
	G5=30u"Gold	105=10.5		R=Tape & Reel+CAP	
	S0=Gold Flash/Tin	116=11.6			
	S3=10u"Gold/Tin	118=11.8			
	S4=15u"Gold/Tin	135=13.5			
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

Item	Pin Length	A	B	Mating
Standard	8.50	3.00	3.00	2135
	9.50	3.00	4.00	2145
	10.50	3.00	5.00	2150
	11.60	3.00	6.10	2171 2185 A1
	11.80	2.40	6.90	2171 2185
Alternate				

A4	2021/01/29	Add CAP	A4	DuYing	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A3	2018/06/02	Cancel PBT & Modify P/N	A3	Surong Xu	x.x ±0.40	DuYing	2021/01/29	UNIT	mm [inch]	1125-11XXXXXXXCXXX A4
A2	2018/01/22	Modify P/N	A2	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/05/17	NEW	-----	-----	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	PH2.54 SINGLE ROW S/T H=2.5
REV	DATE	MODIFICATION DESCRIPTION	CHANGE		Angle ± 3°			PROJ.	Customer NO.	
					DIM TOL					

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

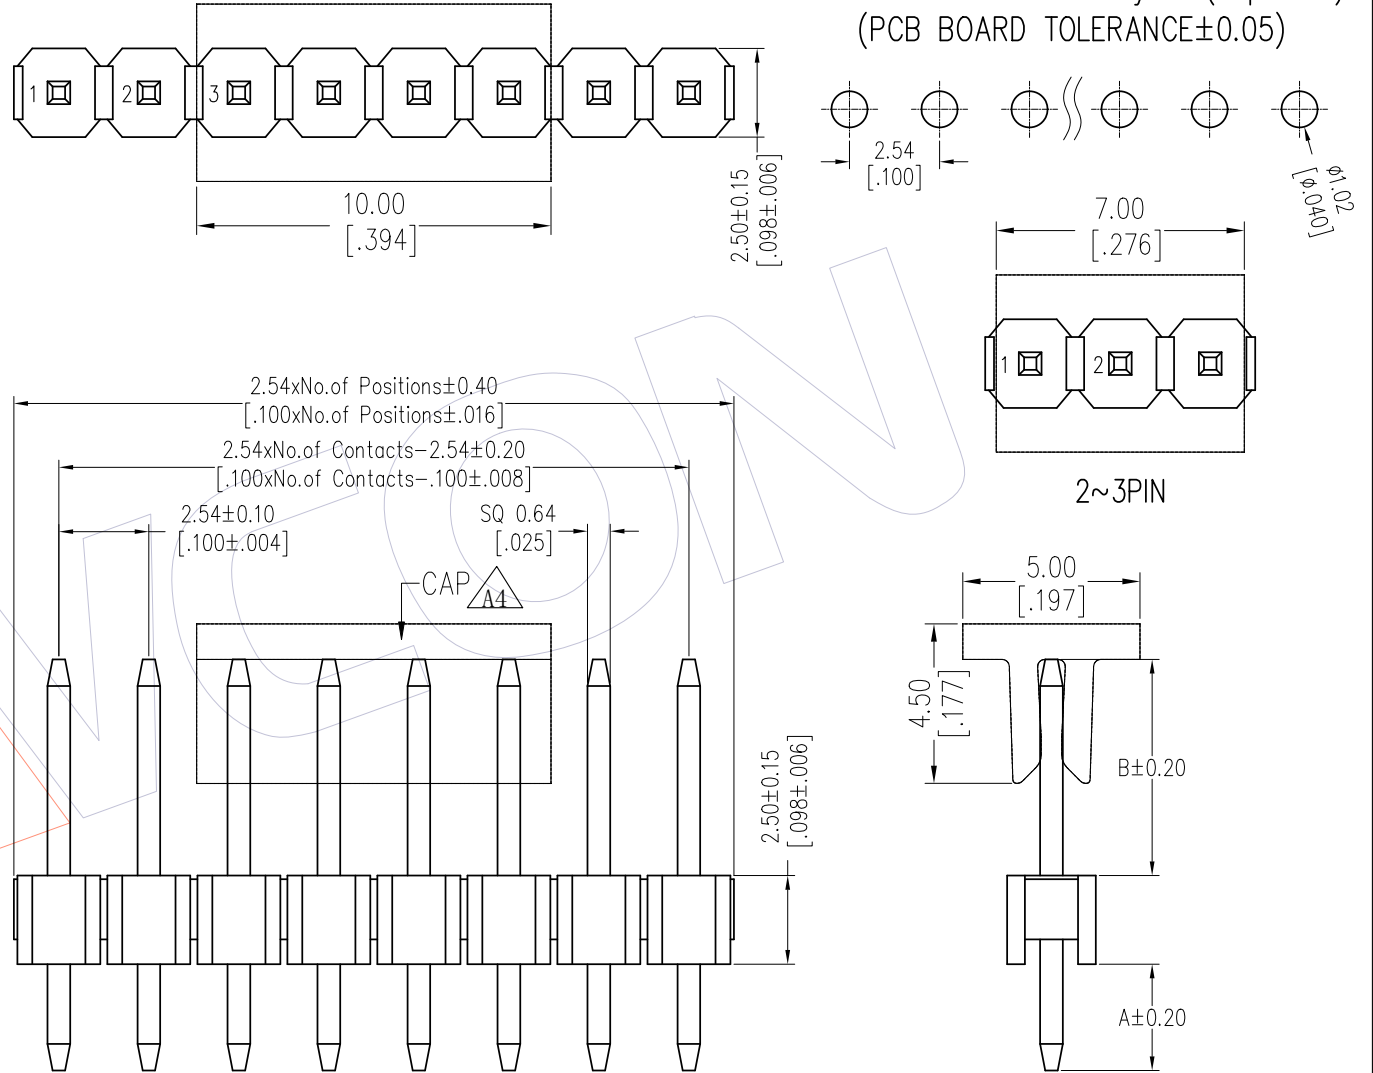

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com