

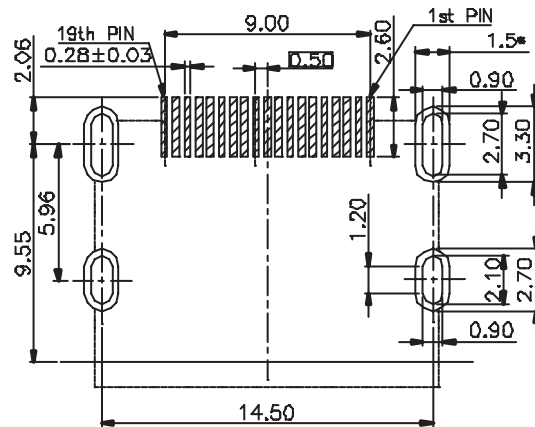
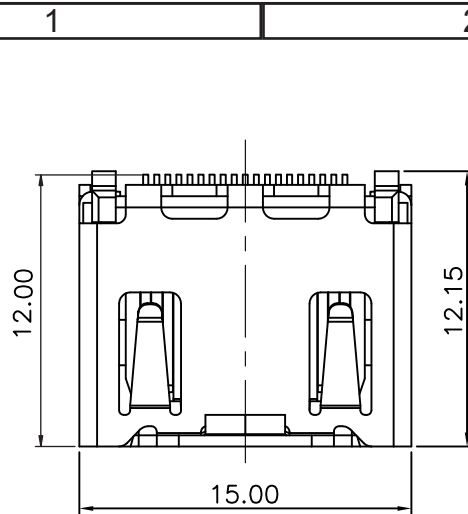


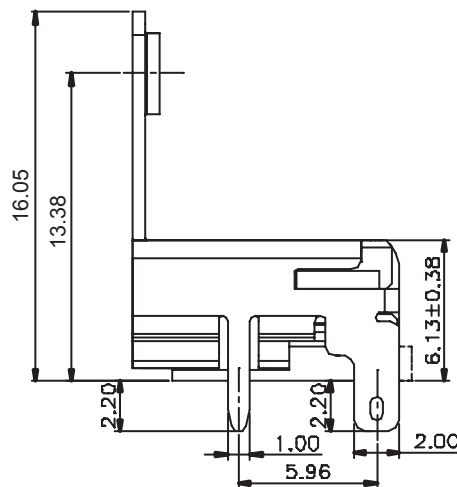

PCB LAYOUT - COMPONENT VIEW

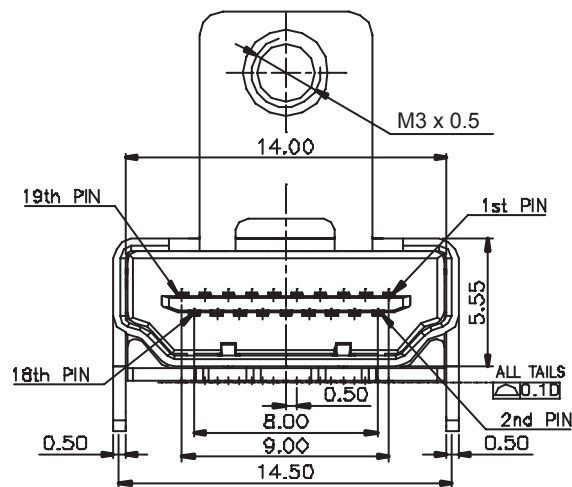

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR MATERIAL: LCP
COLOUR: BLACK
CONTACT MATERIAL: PHOSPHORE BRONZE
CONTACT TYPE: STAMPED
CONTACT PLATING: SELECTIVE GOLD
SHIELDING: BRASS TIN PLATED
QUALITY CLASS: 1500 MATING CYCLES

ENVIRONMENTAL
OPERATING TEMPERATURE: -25 °C UP TO 85 °C
FLAMMABILITY RATING UL94-V0
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 0.5 A
WORKING VOLTAGE: 40 VAC
INSULATION RESISTANCE: >100 mOHM
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC/MN
CONTACT RESISTANCE: 30 mOHM MAX

STANDARD
UL CERTIFIED: E323964

SOLDERING
JEDEC LEAD FREE REFLOW SOLDERING PROCESS

PACKAGING
TRAY

RoHS Compliant

G			
F	24-NOV-15	UL CERTIFICATION	AK
E	09-NOV-11	QUALITY CLASS	GG
D	05-OCT-10	SHIELDING	JC
C	08-JUL-10	PACKAGING	JC
B	05-DEC-07	MODIFICATIONS	EC
A	20-NOV-07	PDF	EC
REV	DATE	FILE	BY

PROJECTION:



APPROVAL: NPr

GENERAL TOLERANCE

.X = ± 0.2

.XX = ± 0.15

UNIT: MM

SCALE:

SHEET: 1/3

DRAW: PEARL





DESCRIPTION: ANGLED SMT HDMI M3 SCREW

WERI PART NO: 685 119 135 725

SIZE

A4

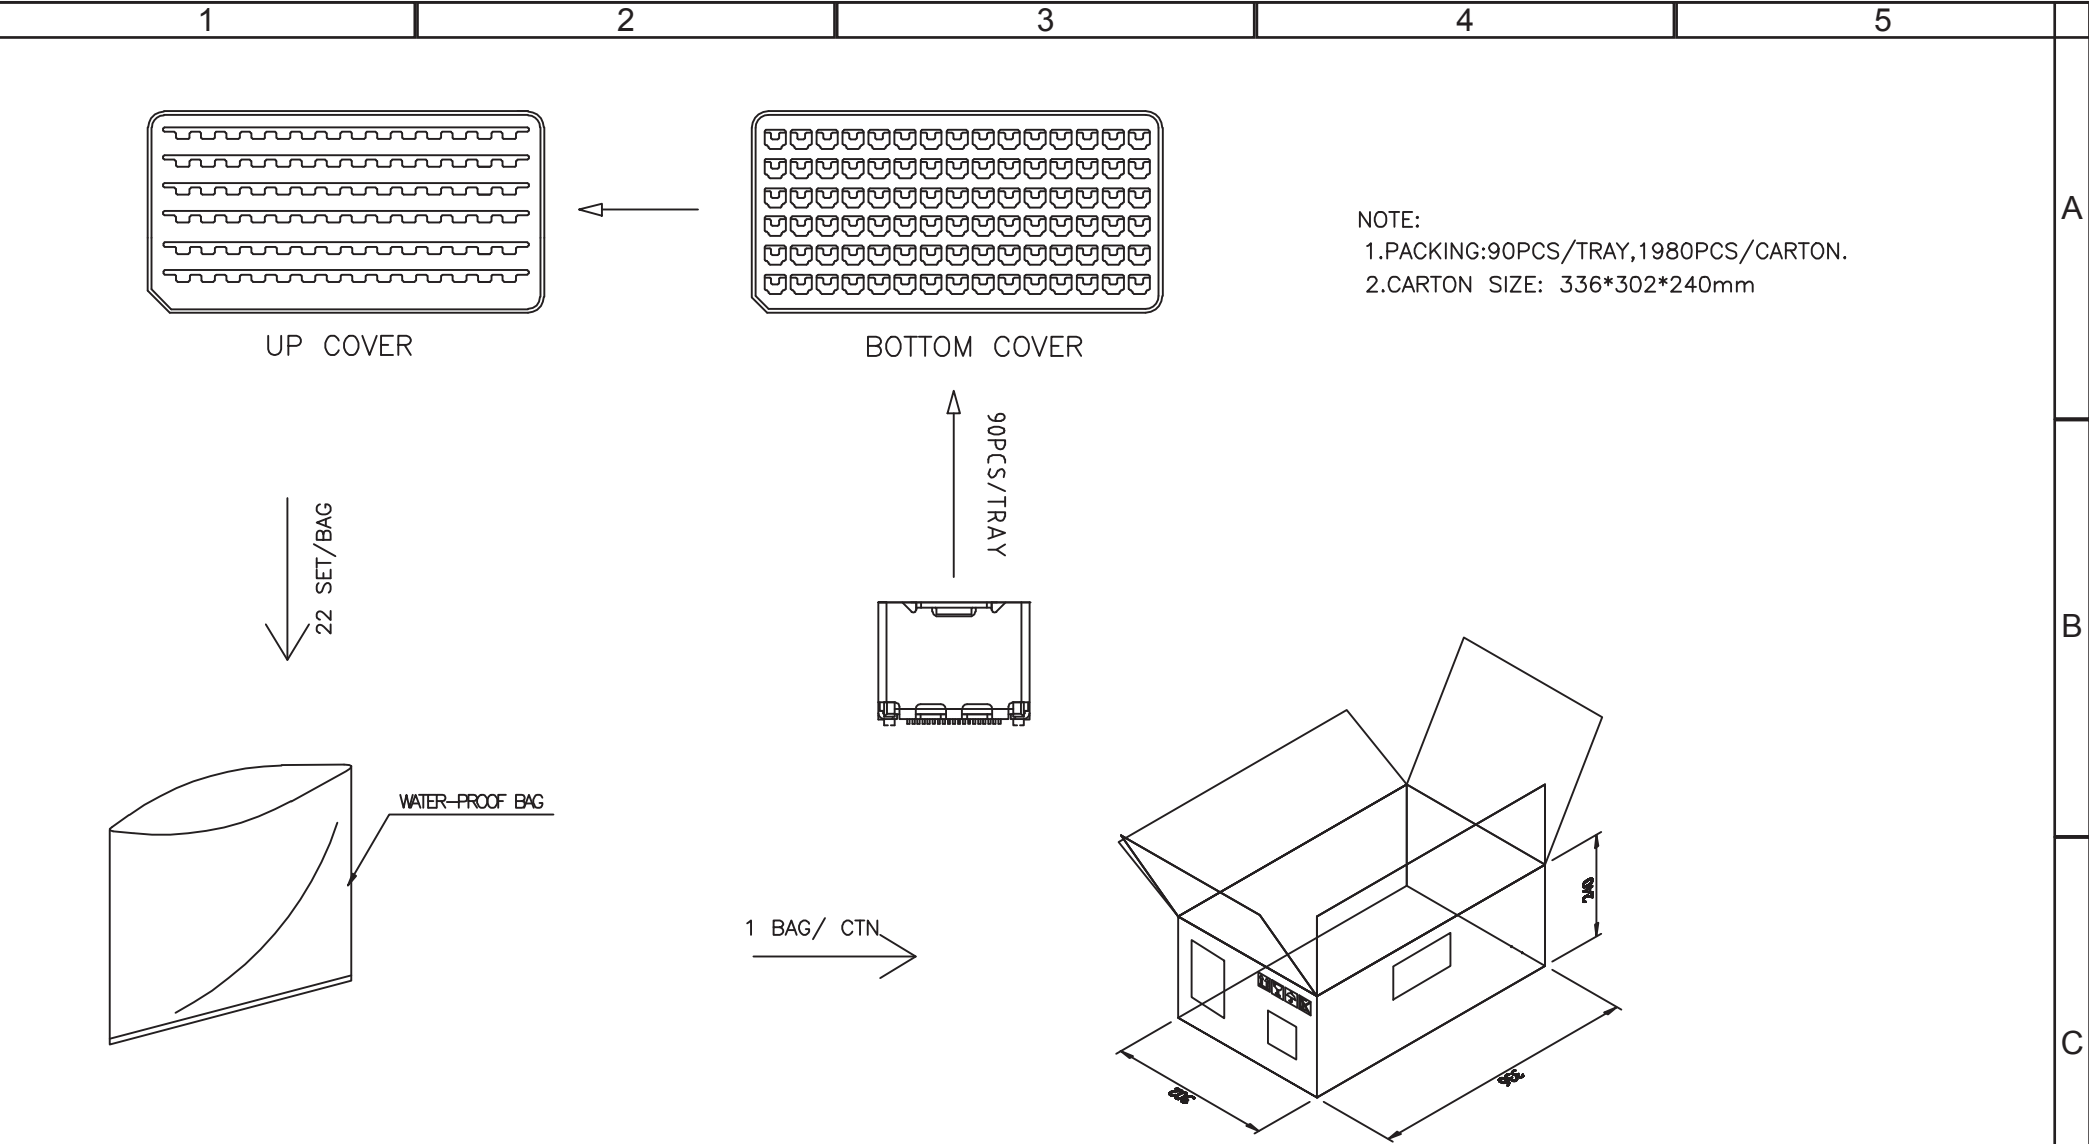

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = ± 0.2 .XX = ± 0.15	 WÜRTH ELEKTRONIK	
G							
F							
E							
D				APPROVAL: NPr	UNIT: MM	DESCRIPTION: ANGLED SMT HDMI M3 SCREW	
C					SCALE:		
B					SHEET: 2/3		
A					DRAW: PEARL		
REV	DATE	FILE	BY				SIZE A4

