


Pad Area
 Keep Out Area
PCB LAYOUT TOP VIEW
 (TOLERANCE:±0.05)

Pin#	Name	Type	Card Detects/ Data Line(Bit#)
1	CD/DAT3	I/O/PP	Command/Response
2	CMD	PP	Supply voltage
3	Vss1	S	Supply voltage ground
4	VDD	S	Supply voltage
5	CLK	I	Clock
6	Vss2	S	Supply voltage ground
7	DAT0	I/O/PP	Data Line [Bit0]
8	DAT1	I/O/PP	Data Line [Bit1]
9	DAT2	I/O/PP	Data Line [Bit2]

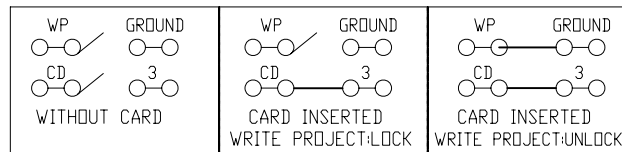

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SD PUSH 带锁卡
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. : HYC33-SD11-288
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO. : HYC-SIM102010
			SHEET NO. : 1 OF 1