

VLW Series

Features

- 12.5φ ~ 16φ, 125°C, 2,000 hours assured
- Suitable for automotive application
- Peak acceleration: 50G / 30G
- RoHS Compliance




Marking color: Black

Specifications

| Items | Performance | | | | | | | | | | | | | | | | | | | | |
|--|---|---------------|---------------|--------------------|------------------------------|------|-----------------------------------|-----------------|------------------------|------|--------|-----------|------|-----|-------|-------------------|-----------------|------|-----|------|------|
| Category Temperature Range | -40°C ~ +125°C | | | | | | | | | | | | | | | | | | | | |
| Capacitance Tolerance | ±20% (at 120Hz, 20°C) | | | | | | | | | | | | | | | | | | | | |
| Leakage Current (at 20°C) | I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF V = rated DC working voltage in V | | | | | | | | | | | | | | | | | | | | |
| Tanδ (at 120Hz, 20°C) | <table border="1"> <tr> <th>Rated Voltage</th> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <th>Tanδ (max)</th> <td>0.32</td> <td>0.24</td> <td>0.21</td> <td>0.18</td> <td>0.15</td> </tr> </table> <p>When the capacitance exceeds 1,000μF, 0.02 shall be added every 1,000μF increase.</p> | Rated Voltage | 10 | 16 | 25 | 35 | 50 | Tanδ (max) | 0.32 | 0.24 | 0.21 | 0.18 | 0.15 | | | | | | | | |
| Rated Voltage | 10 | 16 | 25 | 35 | 50 | | | | | | | | | | | | | | | | |
| Tanδ (max) | 0.32 | 0.24 | 0.21 | 0.18 | 0.15 | | | | | | | | | | | | | | | | |
| Low Temperature Characteristics (at 120Hz) | <p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <th>Rated Voltage</th> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <th>Impedance</th> <td>Z(-25°C)/Z(+20°C)</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <th>Ratio</th> <td>Z(-40°C)/Z(+20°C)</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table> | Rated Voltage | 10 | 16 | 25 | 35 | 50 | Impedance | Z(-25°C)/Z(+20°C) | 3 | 2 | 2 | 2 | 2 | Ratio | Z(-40°C)/Z(+20°C) | 5 | 4 | 3 | 3 | 3 |
| Rated Voltage | 10 | 16 | 25 | 35 | 50 | | | | | | | | | | | | | | | | |
| Impedance | Z(-25°C)/Z(+20°C) | 3 | 2 | 2 | 2 | 2 | | | | | | | | | | | | | | | |
| Ratio | Z(-40°C)/Z(+20°C) | 5 | 4 | 3 | 3 | 3 | | | | | | | | | | | | | | | |
| Endurance | <table border="1"> <tr> <th>Test Time</th> <td>2,000 Hrs</td> </tr> <tr> <th>Capacitance Change</th> <td>Within ±30% of initial value</td> </tr> <tr> <th>Tanδ</th> <td>Less than 300% of specified value</td> </tr> <tr> <th>Leakage Current</th> <td>Within specified value</td> </tr> </table> <p>* The above Specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 125°C.</p> | Test Time | 2,000 Hrs | Capacitance Change | Within ±30% of initial value | Tanδ | Less than 300% of specified value | Leakage Current | Within specified value | | | | | | | | | | | | |
| Test Time | 2,000 Hrs | | | | | | | | | | | | | | | | | | | | |
| Capacitance Change | Within ±30% of initial value | | | | | | | | | | | | | | | | | | | | |
| Tanδ | Less than 300% of specified value | | | | | | | | | | | | | | | | | | | | |
| Leakage Current | Within specified value | | | | | | | | | | | | | | | | | | | | |
| Shelf Life Test | <table border="1"> <tr> <th>Test Time</th> <td>1,000 Hrs</td> </tr> <tr> <th>Capacitance Change</th> <td>Within ±30% of initial value</td> </tr> <tr> <th>Tanδ</th> <td>Less than 300% of specified value</td> </tr> <tr> <th>Leakage Current</th> <td>Within specified value</td> </tr> </table> <p>* The above Specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 125°C without voltage applied.</p> | Test Time | 1,000 Hrs | Capacitance Change | Within ±30% of initial value | Tanδ | Less than 300% of specified value | Leakage Current | Within specified value | | | | | | | | | | | | |
| Test Time | 1,000 Hrs | | | | | | | | | | | | | | | | | | | | |
| Capacitance Change | Within ±30% of initial value | | | | | | | | | | | | | | | | | | | | |
| Tanδ | Less than 300% of specified value | | | | | | | | | | | | | | | | | | | | |
| Leakage Current | Within specified value | | | | | | | | | | | | | | | | | | | | |
| Ripple Current & Frequency Multipliers | <table border="1"> <tr> <th rowspan="2">Cap.(μF)</th> <th colspan="5">Frequency(Hz)</th> </tr> <tr> <th>50, 60</th> <th>120</th> <th>1k</th> <th>10k up</th> </tr> <tr> <td>Under 330</td> <td>0.80</td> <td>1.0</td> <td>1.25</td> <td>1.40</td> </tr> <tr> <td>330 < C ≤ 2,200</td> <td>0.85</td> <td>1.0</td> <td>1.20</td> <td>1.30</td> </tr> </table> | Cap.(μF) | Frequency(Hz) | | | | | 50, 60 | 120 | 1k | 10k up | Under 330 | 0.80 | 1.0 | 1.25 | 1.40 | 330 < C ≤ 2,200 | 0.85 | 1.0 | 1.20 | 1.30 |
| Cap.(μF) | Frequency(Hz) | | | | | | | | | | | | | | | | | | | | |
| | 50, 60 | 120 | 1k | 10k up | | | | | | | | | | | | | | | | | |
| Under 330 | 0.80 | 1.0 | 1.25 | 1.40 | | | | | | | | | | | | | | | | | |
| 330 < C ≤ 2,200 | 0.85 | 1.0 | 1.20 | 1.30 | | | | | | | | | | | | | | | | | |
| Vibration | <p>Peak acceleration: 50G Frequency: 5 to 2,000 Hz reciprocation for 20 min. Direction and duration of vibration: 3 orthogonal directions mutually each for 4 Hrs.</p> <p>Peak to peak amplitude: 1.5mm</p> | | | | | | | | | | | | | | | | | | | | |


Diagram of Dimensions

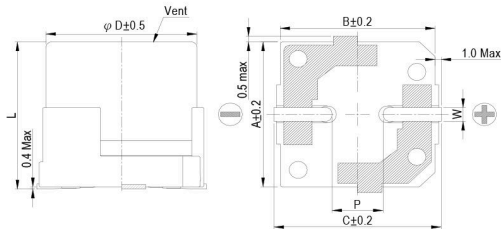

Marking

Lead Spacing and Diameter

| | | Unit: mm | | | | |
|------|------------|----------|------|------|-----------|---------|
| φ D | L | A | B | C | W | P ± 0.2 |
| 12.5 | 13.5 ± 0.5 | 13.0 | 13.5 | 14.5 | 1.1 ~ 1.4 | 4.4 |
| 12.5 | 16 ± 0.5 | 13.0 | 13.5 | 14.5 | 1.1 ~ 1.4 | 4.4 |
| 16 | 16.5 ± 0.5 | 16.5 | 17.0 | 18.2 | 1.1 ~ 1.4 | 6.4 |



Dimension & Permissible Ripple Current

Dimension: φ D × L(mm)

Ripple Current: mA/rms at 120 Hz, 125°C

| μF | V. DC Contents | 10V (1A) | | 16V (1C) | | 25V (1E) | | 35V (1V) | | 50V (1H) | |
|-------|----------------|-----------|-----|-----------|-----|-----------|-----|-----------|-----|-----------|-----|
| | | φ D×L | mA | φ D×L | mA | φ D×L | mA | φ D×L | mA | φ D×L | mA |
| 100 | 101 | | | | | | | | | 12.5×13.5 | 380 |
| 220 | 221 | | | | | | | 12.5×13.5 | 380 | 12.5×16 | 430 |
| 330 | 331 | | | 12.5×13.5 | 500 | 12.5×13.5 | 500 | 16×16.5 | 680 | 16×16.5 | 680 |
| 470 | 471 | 12.5×13.5 | 500 | 12.5×13.5 | 500 | 12.5×13.5 | 500 | 16×16.5 | 680 | 16×16.5 | 680 |
| 680 | 681 | 12.5×13.5 | 500 | 12.5×13.5 | 500 | 12.5×16 | 600 | 16×16.5 | 680 | | |
| 1,000 | 102 | 12.5×16 | 600 | 12.5×16 | 600 | 16×16.5 | 680 | | | | |
| 1,500 | 152 | 12.5×16 | 600 | 16×16.5 | 680 | | | | | | |
| 2,200 | 222 | 16×16.5 | 680 | | | | | | | | |

Part Numbering System

| | | | | | | | |
|-------------|-------------|-----------------------|---------------|--------------|--------------------------------|---------------|------------------------------|
| VLW series | 470μF | ±20% | 16V | Carrier Tape | Anti-vibration structure (30G) | 12.5φ × 13.5L | Pb-free and PET coating case |
| VLW | 471 | M | 1C | TR | K | 1313 | |
| Series name | Capacitance | Capacitance Tolerance | Rated Voltage | Package Type | Terminal Type | Case size | Lead Wire and Coating Type |

Note: For more details, please refer to "Part Numbering System (SMD Type)" on page 12.