

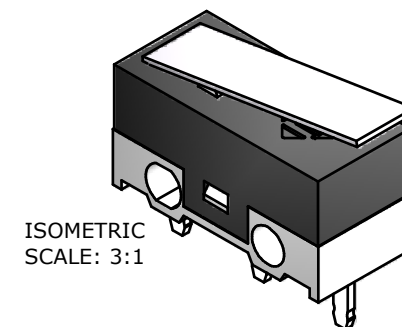


P.C. MOUNTING


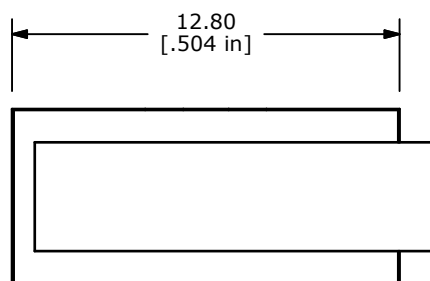


O.P. (MM)	P.T. (MM)
8.80 ± 0.80	1.60

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- ▲3. RATING: 3A @ 125 VAC
1.5A @ 250VAC UL
- ▲4. OPERATING FORCE: 15±5 GRAMS
- OPERATING TEMP: -25°C TO 75°C
- ELECTRICAL LIFE: 10,000 CYCLES MIN.
- INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
- DIELECTRIC STRENGTH: 1,000VAC - 1 MINUTE
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT
- PACKAGED IN TRAYS, 120 PIECES PER TRAY.

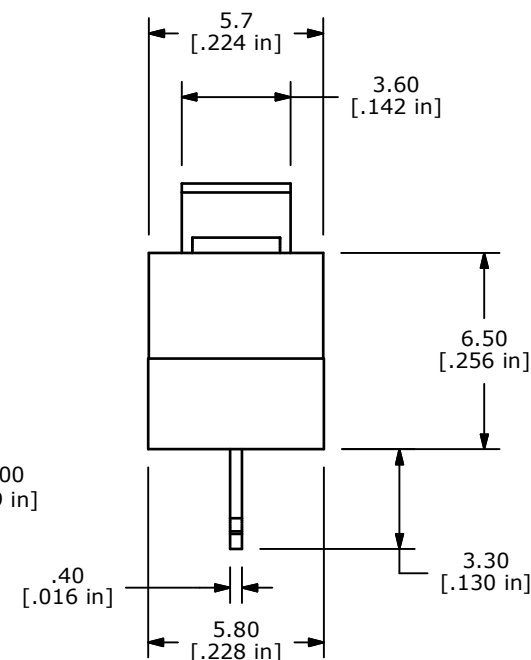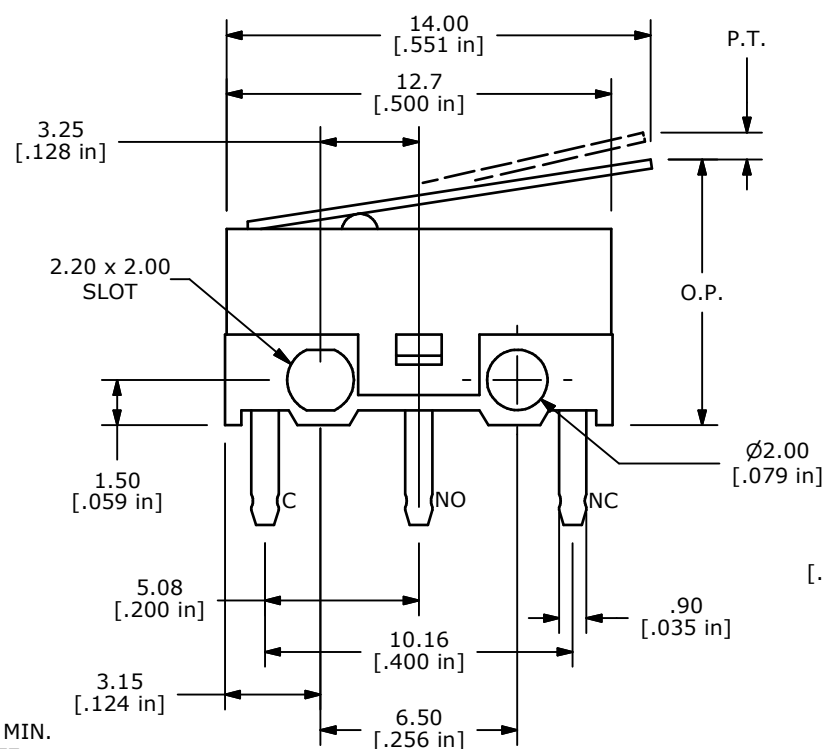

C	18157	REMOVE CE APPROVED FROM NOTES	6/24/08	BLR
B	18089	ADD NOTE 11	5/9/08	RC
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE SS0750101F015P1A

SCALE 4:1

DATE 6/24/2008

DR BLR

DWG Q971011

REV C